

[manuals.plus](#) /

› [PICTRON](#) /

› [PICTRON VIJIM LS08 Flexible Overhead Camera Mount Desk Stand Instruction Manual](#)

## PICTRON LS08

# PICTRON VIJIM LS08 Flexible Overhead Camera Mount Desk Stand Instruction Manual

Model: LS08  
Brand: PICTRON

## INTRODUCTION

---

The PICTRON VIJIM LS08 Flexible Overhead Camera Mount Desk Stand is a versatile accessory designed to enhance your photography, videography, and live streaming setups. This manual provides detailed instructions for assembly, operation, and maintenance to ensure optimal performance and longevity of your device.



Figure 1: Overview of the VIJIM LS08 Flexible Overhead Camera Mount Desk Stand.

## WHAT'S IN THE BOX

Please verify that all components are present before proceeding with assembly.

- Desk Clamp Base
- 3-Section Detachable Arm Poles (with 1/4" ball heads)
- 1/4" to 5/8" Screw Adapter
- 1/4" to 3/8" Screw Adapter
- Allen Key (for adjustments)



Figure 2: All components of the VIJIM LS08 as packaged.

## SETUP INSTRUCTIONS

### 1. Install the Desk Clamp

1. Place the padded desk clamp onto the edge of your desk.
2. Tighten the screw mechanism until the clamp is securely fastened to the desk. Ensure it is stable and does not wobble. The clamp is compatible with desks up to 5 cm (2 inches) thick.

## Compatible for Microphones or Shock Mounts with 3/8" & 5/8" Interfaces



Figure 3: Proper installation of the desk clamp on a table surface.

### 2. Assemble the Flexible Arm

1. Insert the first arm section into the desk clamp base.
2. Connect additional arm sections by screwing their 1/4" ball heads together. The LS08 features a 3-section detachable pole design, allowing for customizable length and configuration.
3. Tighten the locking levers on each ball head to secure the desired angle and position.

## ■ 3-stage Extendable Arms

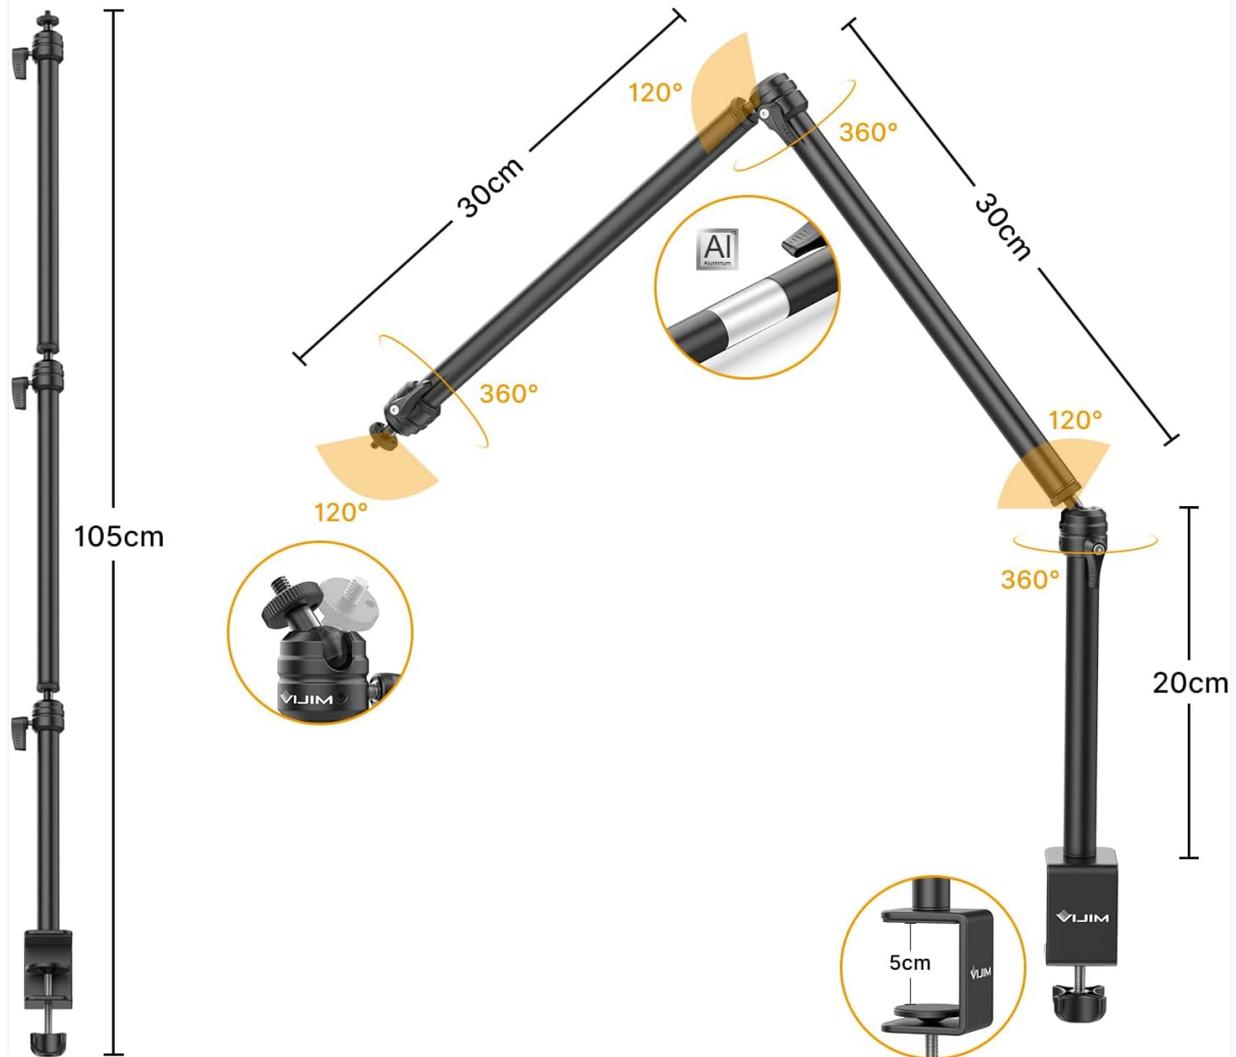


Figure 4: Illustration of the 3-stage extendable arm assembly and articulation points.

### 3. Attach Your Device

1. The arm features a standard 1/4" screw thread at its end. Attach your camera, webcam, ring light, or LED video light directly to this thread.
2. For microphones, use the provided 1/4" to 5/8" or 1/4" to 3/8" screw adapters as needed. Screw the appropriate adapter onto the arm's 1/4" thread, then attach your microphone.

# ■ Excellent Stability

1KG load-bearing in the horizontal state



Figure 5: Adapters for microphone compatibility with the 1/4" screw thread.

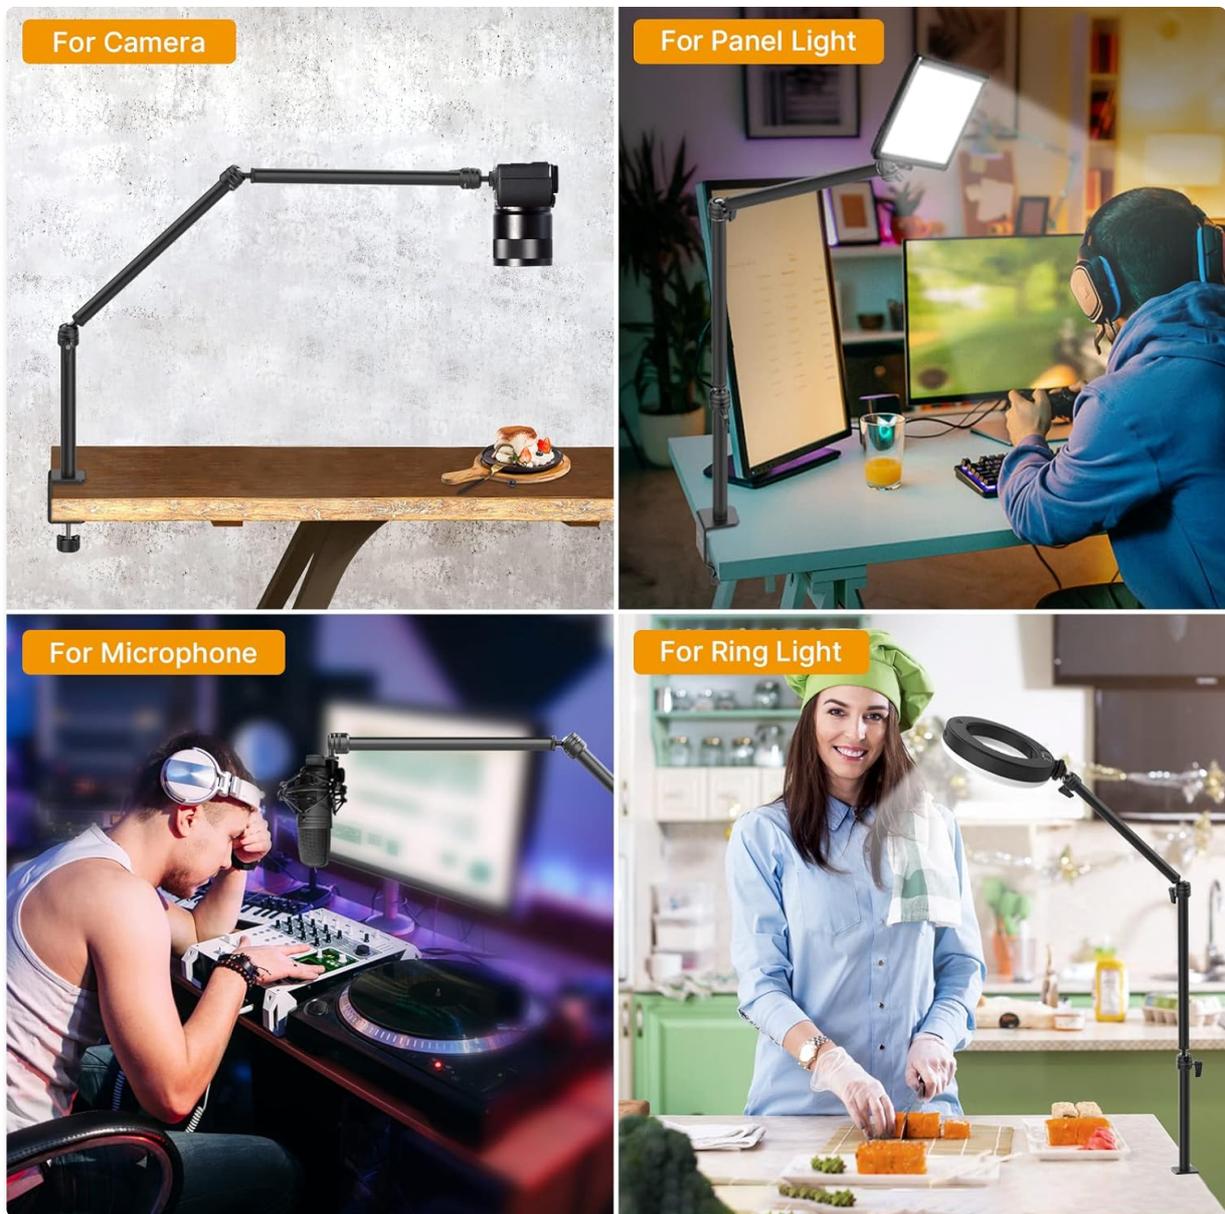


Figure 6: Examples of devices compatible with the VIJIM LS08 mount.

## Setup Demonstration Video

Your browser does not support the video tag.

Video 1: A demonstration of the VIJIM LS08 Flexible Desk Mount setup and features by SHUHEStore.

## OPERATING INSTRUCTIONS

### Adjusting the Arm

- Each arm section can be freely rotated 360 degrees and adjusted up to 120 degrees at the joints.
- Loosen the locking levers on the ball heads to adjust the angle and extension of the arm.
- Once the desired position is achieved, tighten the levers firmly to secure the arm.

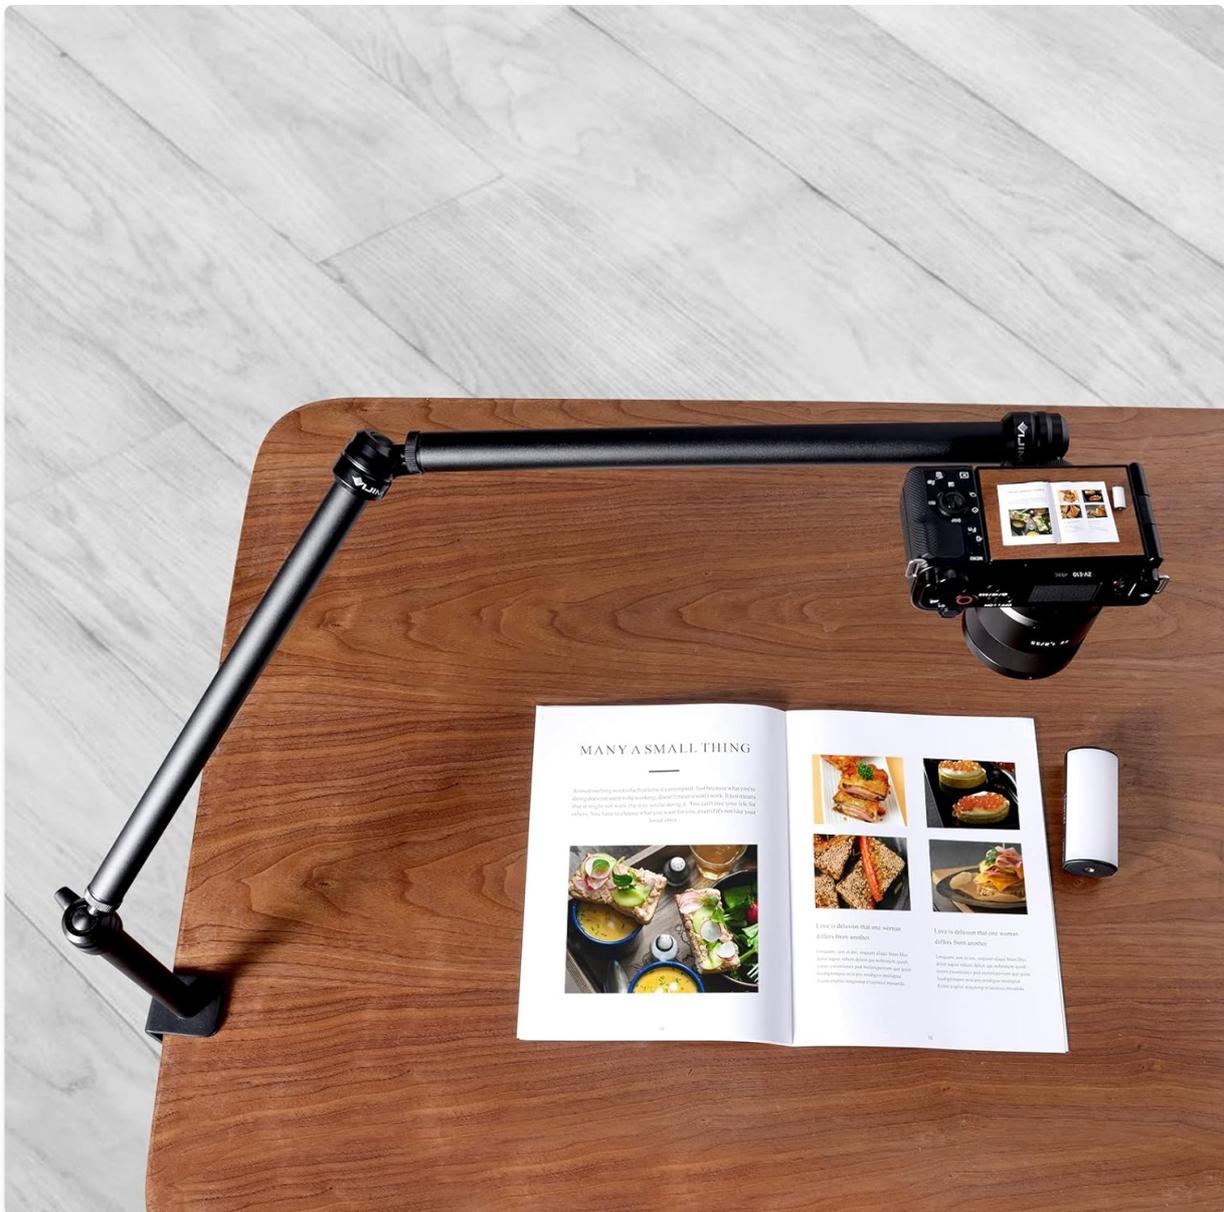


Figure 7: The flexible arm positioned for overhead camera use.

## Load Capacity

- The LS08 has a maximum load-bearing capacity of 1KG (2.2lb) in the horizontal state.
- Ensure that the weight of your attached device does not exceed this limit to maintain stability and prevent damage.

## MAINTENANCE

- Regularly check all screws and levers to ensure they are tight and secure.
- Clean the aluminum alloy surfaces with a soft, dry cloth. Avoid abrasive cleaners that could damage the anodized finish.
- Store the mount in a dry place when not in use to prevent corrosion.

## TROUBLESHOOTING

### Arm is not holding position:

- Ensure all locking levers on the ball heads are fully tightened.

- Verify that the weight of the attached device does not exceed the 1KG horizontal load capacity.
- Check if the desk clamp is securely fastened to the desk.

### Device is not attaching securely:

- Confirm that your device uses a standard 1/4" screw thread.
- If attaching a microphone, ensure the correct 1/4" to 5/8" or 1/4" to 3/8" adapter is used and securely screwed in.

## SPECIFICATIONS

Feature	Detail
Model Number	LS08
Brand	PICTRON
Material	Aluminum Alloy
Product Dimensions	3.94 x 3.94 x 1.97 inches
Item Weight	2.07 pounds (939 Grams)
Max Horizontal Load Capacity	1KG (2.2lb)
Desk Clamp Max Opening	5 cm (2 inches)
Screw Thread	1/4"-20 Universal

## WARRANTY AND SUPPORT

For warranty information or technical support, please refer to the product packaging or contact PICTRON customer service directly. Keep your purchase receipt for any warranty claims.