




***Lumens***<sup>®</sup>

# Shure MXCW & CamConnect Pro Settings Guide

# Get IP address

1. Connect the MXCW Access Point Transceiver to a PoE power source.
2. Note the IP address on the LCD of the MXCW APT.

Please note that if you are logging in for the first time, you will need to set the passphrase.



**Set admin passphrase**

You must set Admin passphrase before configuring this device

Enter new passphrase

0 / 64

Repeat new passphrase

0 / 64

Set

Type the IP address into the browser, to log in. Enter the passphrase.



**MXCW APT**

Microflex Complete Wireless Access Point

Sign in as

Admin

Passphrase

0 / 64



Sign in

Language

English (US)

# Seats configuration

1. MXCW ATP will list available microphones.
2. Configure each seat role.
3. Select one of 6 participant roles.

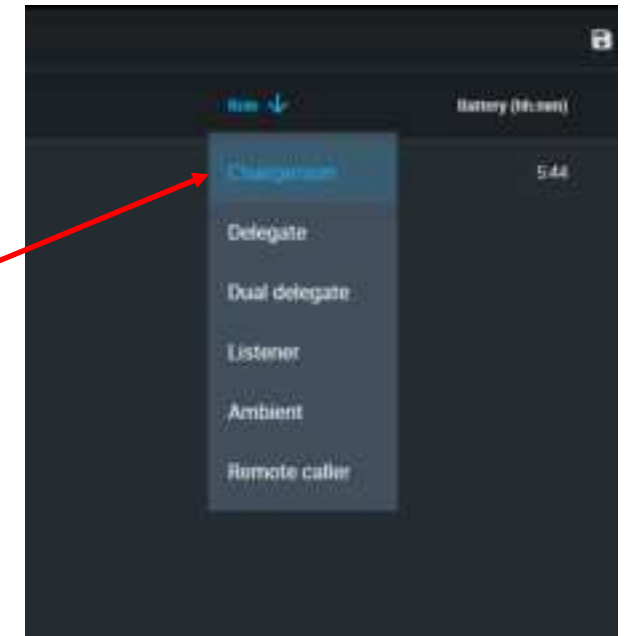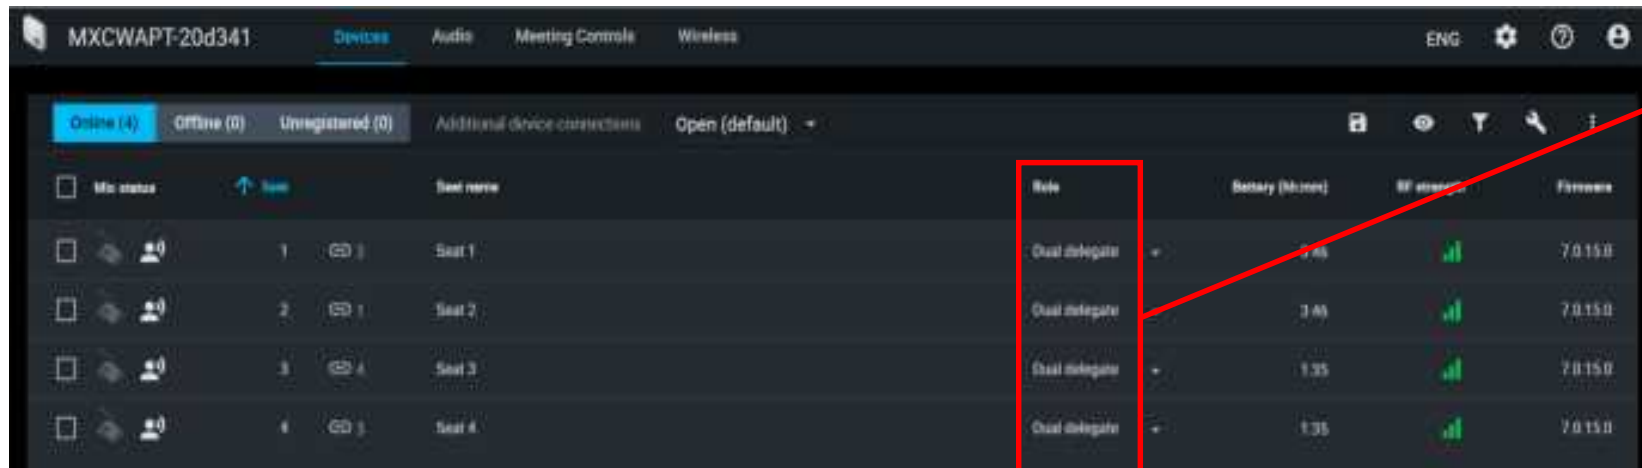

# Seats configuration

1. The selected roles affect the behavior of the connected cameras.

Role	Brief description
Chairperson	Moderator or leader of the event
Delegate	Typical participant
Listener	No microphone required
Ambient	Improves audio mix
Remote Caller	Delegates can remotely participate in events
Dual Delegate	Two delegates share one conference unit

# Role setting & camera behavior

If many people are talking simultaneously, the camera will prioritize the chairperson. The camera will only switch to another speaker after the chairperson finishes talking.



⋮



 Chairperson  
 Participant

# Role setting & camera behavior


If both microphone users are chairpersons, the camera will be triggered by the last speaker.



Chairperson

# Role setting & camera behavior


If several people are talking at the same time, the last one to talk will be prioritized.

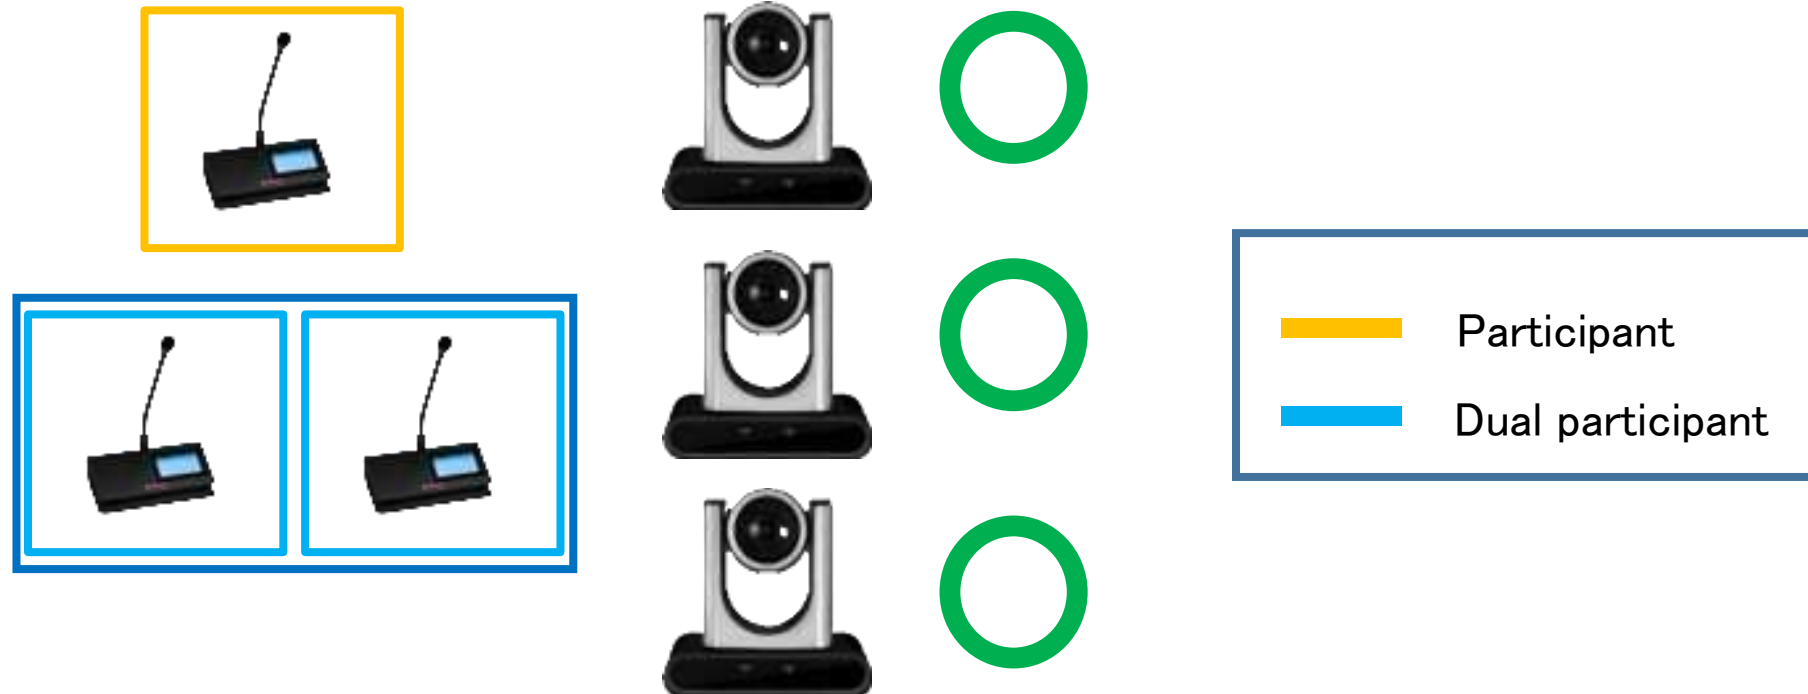

# Update CamConnect Pro's firmware

Click  to ensure your CamConnect Pro has the latest firmware.


✂ Shure MXCW is compatible with CamConnect Pro v1.5.6 or later.

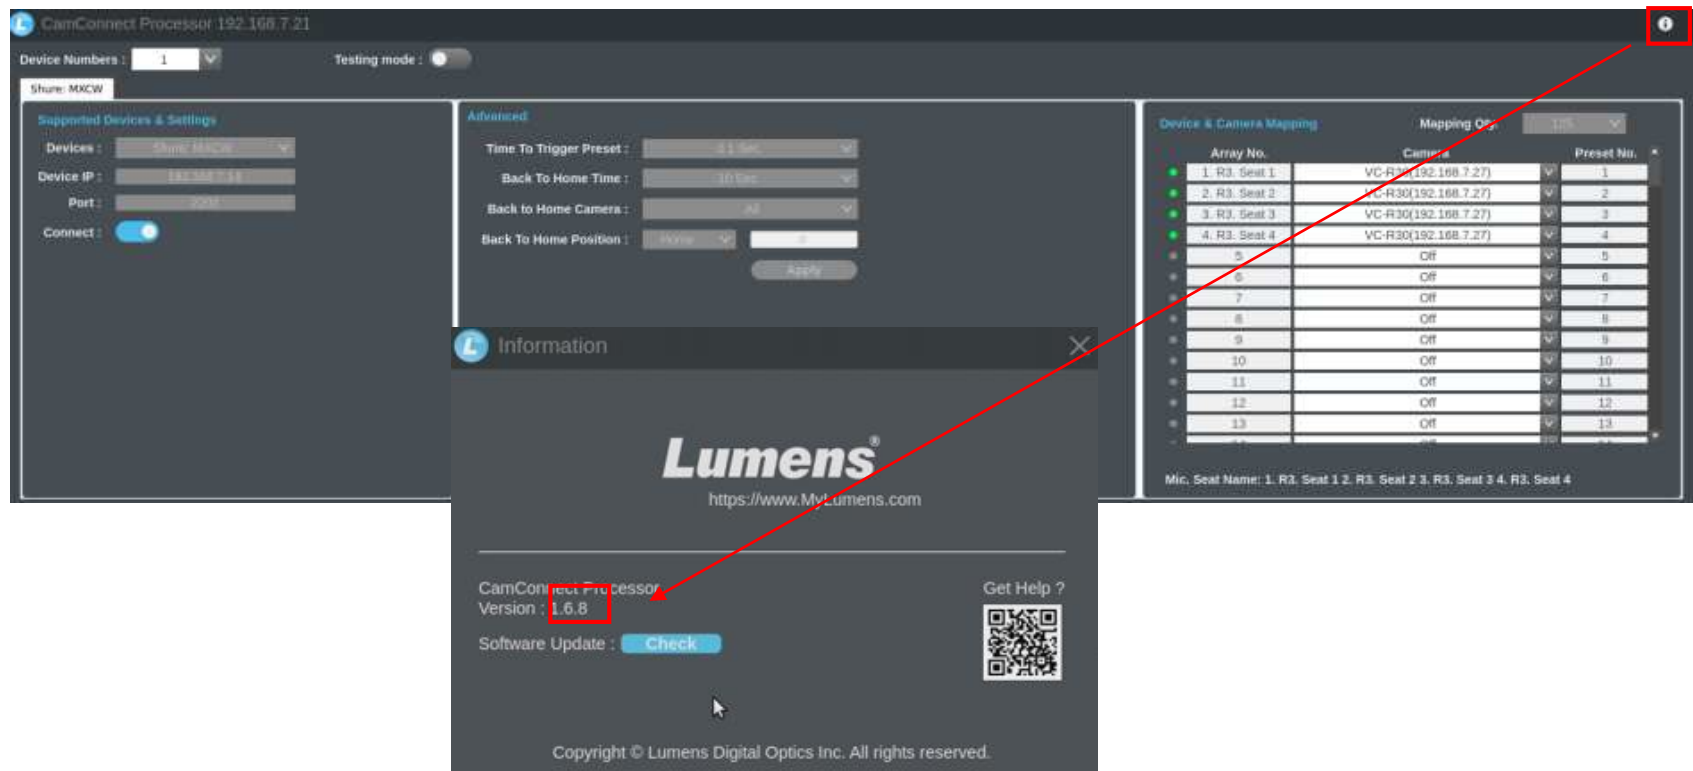



# Link CamConnect Pro with Shure MXCW

1. Enter MXCW's IP address. Press the [Connect].
  2. Connect to the specific camera you require.
  3. Connect each seat to the desired camera.
- ✂ Please note that MXCW can control up to 125 microphones.

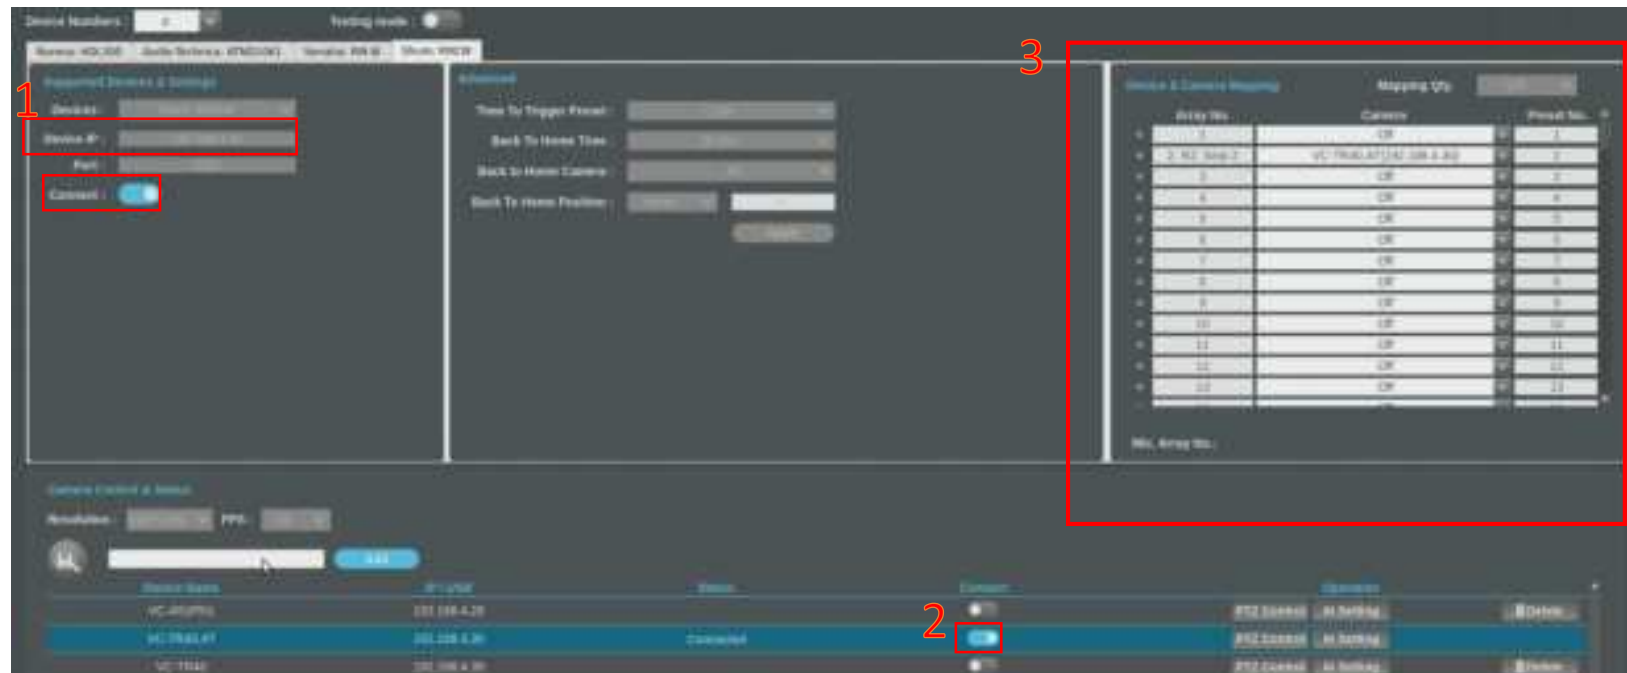

# Channel description

Each 'R' number represents a different role, and the roles shown here correspond with the configuration on the webpage

R0: Offline  
R1: Chairperson  
R2: Typical participant  
R3: Dual Delegate  
R4: Listener  
R5: Remote Caller

1. R3. Seat 1

SeatID      SeatRole      SeatName

The screenshot shows the CamConnect Processor interface. On the left, there are settings for 'Supporting Devices & Settings' and 'Advanced'. The 'Advanced' section includes 'Time To Trigger Preset', 'Back To Home Time', 'Back To Home Camera', and 'Back To Home Position'. On the right, there is a 'Device & Camera Mapping' table. A red arrow points from the '1. R3. Seat 1' text above to the first row of the table, which is highlighted with a red box.

Array No.	Camera	Preset No.
1. R3. Seat 1	VC-R30(192.168.7.27)	1
2. R3. Seat 2	VC-R30(192.168.7.27)	2
3. R3. Seat 3	VC-R30(192.168.7.27)	3
4. R3. Seat 4	VC-R30(192.168.7.27)	4
5.	Off	5
6.	Off	6
7.	Off	7
8.	Off	8
9.	Off	9
10.	Off	10
11.	Off	11
12.	Off	12
13.	Off	13

Mic. Seat Name: 1. R3. Seat 1 2. R3. Seat 2 3. R3. Seat 3 4. R3. Seat 4

# Thank You!



MyLumens.com



Contact Lumens

