

Wisoqu B09C673DWL

Wisoqu 2.28 Inch Dial Type Thermohygrometer

Model: B09C673DWL

INTRODUCTION

Thank you for choosing the Wisoqu 2.28 Inch Dial Type Thermohygrometer. This device is designed to accurately monitor temperature and humidity in various indoor environments. It features a clear, easy-to-read dial display and requires no batteries for operation. Please read this manual carefully to ensure proper setup and use.

PRODUCT FEATURES

- **Dual Display:** Simultaneously displays current temperature and humidity on a single dial.
- **Clear Readout:** Features a large, easy-to-read dial for quick data interpretation.
- **Versatile Placement:** Designed for both wall-mounting and desktop placement.
- **Durable Construction:** Made with an aluminum alloy outer ring, glass mirror, and aluminum dial for enhanced longevity.
- **Battery-Free Operation:** Mechanical design requires no external power source.
- **Wide Application:** Suitable for use in living rooms, baby rooms, kitchens, greenhouses, offices, and cellars.



Image: Detailed view of the clear dial scale and the wall-mounting hole on the back of the device.

SETUP

The Wisoqu Thermohygrometer is ready to use out of the box, requiring no assembly or batteries. Choose your preferred placement method:

1. **Desktop Placement:** Simply place the device on any flat, stable surface.
2. **Wall Mounting:** Use the integrated wall hole on the back of the device to hang it on a nail or screw. Ensure the mounting point is secure.

For accurate readings, place the thermohygrometer away from direct sunlight, heat sources, air conditioning vents, or areas with strong drafts.



Image: Examples of wall-mounted and desktop placement options for the thermohygrometer.

OPERATING INSTRUCTIONS

This thermohygrometer operates mechanically and continuously displays the current temperature and humidity without any user input or power source.

- **Temperature Reading:** The larger needle indicates the temperature in both Celsius (°C) and Fahrenheit (°F).
- **Humidity Reading:** The smaller needle indicates the relative humidity in percentage (%).

Allow the device approximately 30 minutes to stabilize after placement to provide accurate readings for its new environment.

Dial Type Thermohygrometer



wall mounted

desktop placement



Mini size, the wall hole design makes this thermometer hygrometer fit the wall, and it can also be placed directly on the table is also excellent.



Image: Close-up of the dial face, illustrating how to read temperature and humidity.

MAINTENANCE

The Wisoqu Thermohygrometer requires minimal maintenance due to its durable construction and battery-free design.

- **Cleaning:** Wipe the glass surface and outer casing with a soft, dry, or slightly damp cloth. Do not use abrasive cleaners or immerse the device in water.
- **Storage:** If storing the device for an extended period, keep it in a dry place at room temperature.
- **Avoid Impact:** Protect the device from drops or strong impacts, which can damage the internal mechanism.

TROUBLESHOOTING

If you encounter issues with your thermohygrometer, consider the following:

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Inaccurate readings	Improper placement (direct sunlight, drafts, heat sources)	Relocate the device to a stable environment away from extreme conditions. Allow 30 minutes for stabilization.
Needles not moving	Device is in a very stable environment with no changes in temperature/humidity; internal mechanism damage	Move the device to an area with known temperature/humidity fluctuations to test. If still unresponsive, the device may be damaged.
Physical damage (cracked glass, bent needles)	Impact or mishandling	The device is not user-repairable. Consider replacement.

SPECIFICATIONS

- **Brand:** Wisoqu
- **Model:** B09C673DWL
- **Product Dimensions:** 58mm (2.28 inches) diameter, 13mm (0.51 inches) thickness
- **Item Weight:** 19 Grams (0.67 ounces)
- **Battery Requirement:** None (mechanical)
- **Mounting Type:** Wall Mount / Desktop
- **Temperature Range:** -30°C to 50°C (-20°F to 120°F)
- **Humidity Range:** 0% to 100% RH
- **Temperature Accuracy:** $\pm 2^{\circ}\text{C}$
- **Material:** Aluminum alloy outer ring, glass mirror, aluminum dial

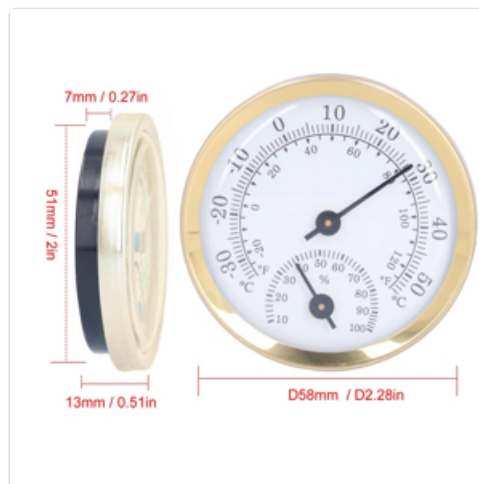


Image: Visual representation of the product dimensions.

WARRANTY AND SUPPORT

Specific warranty information for this product is not provided in this manual. For details regarding warranty coverage or customer support, please refer to the product packaging or contact the retailer where the product was purchased. You may also visit the official Wisoqu store on Amazon for additional information or contact options.

Wisoqu Store Link: [Visit the Wisoqu Store](#)

