

AIMADI AM-3036N

AIMADI Kitchen Sink Faucet with Pull Down Sprayer - Model AM-3036N

Instruction Manual

INTRODUCTION

Thank you for choosing the AIMADI Kitchen Sink Faucet, Model AM-3036N. This manual provides essential information for the proper installation, operation, and maintenance of your new faucet. Please read these instructions carefully before installation and retain them for future reference.

This faucet features a Black Nickel finish, a pull-down sprayer with dual spray modes, a separate pot filler spout, and a single handle for temperature and flow control. It is designed for durability and ease of use in various kitchen, bar, laundry, or outdoor sink applications.

SPECIFICATIONS

Feature	Detail
Brand	AIMADI
Model Name	Commercial Style Kitchen Faucet
Model Number	AM-3036N
Color	Black Nickel
Finish Type	Matte Black
Material	Metal (Thickened Solid Brass Body)
Mounting Type	Deck Mount, Single Hole
Hole Count	1 (or 3 with optional deck plate)
Number of Handles	1
Spout Design	Dual Spout with Pull-Down Sprayer
Spout Height	6.5 inches
Spout Reach	9.3 inches

Overall Height	19.37 inches
Flow Rate	1.8 gpm
Special Features	360° Swivel, Dual Function Sprayer, Dual Spout, Lead Free, Pull Down Sprayer
Certifications	cUPC, NSF 61/372, Lead-free

The faucet is constructed with a thickened solid brass body and features a premium ceramic valve for drip-free operation and extended service life.



Figure 1: Product Dimensions



Figure 2: Thickened Solid Brass Body Construction

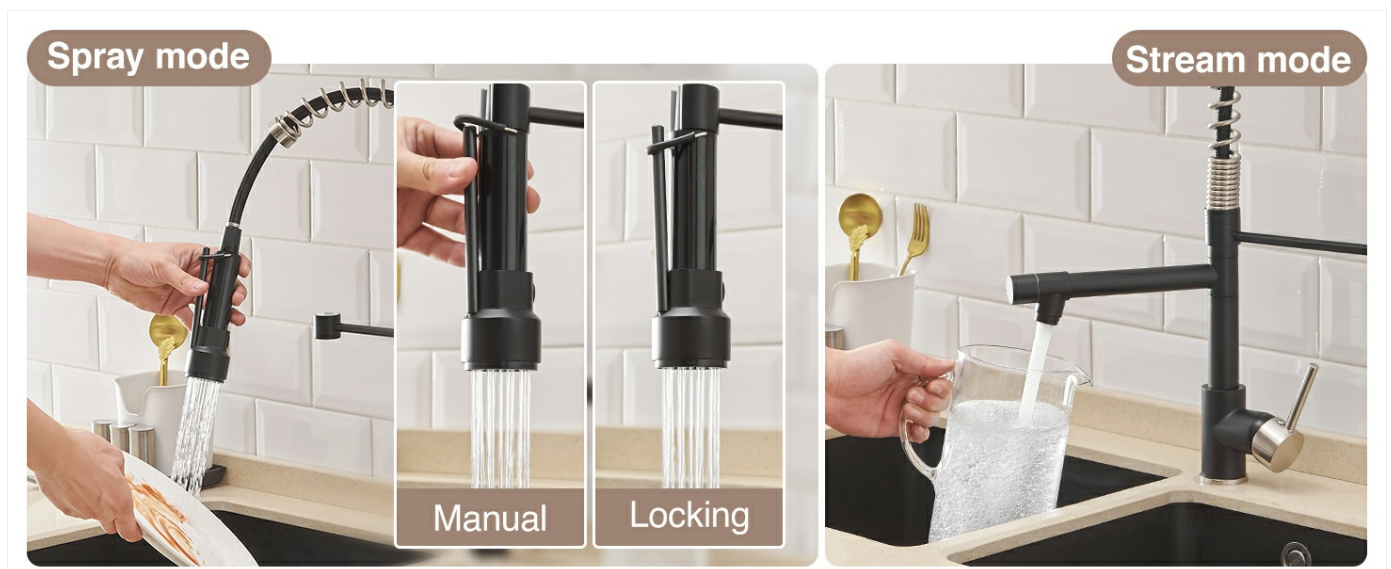


Figure 3: Premium Ceramic Valve

SETUP AND INSTALLATION

Included Components

The package includes the kitchen faucet, mounting accessory, and instruction manual. Please verify all parts are present before beginning installation.

Produktfamilie

Sie können den Wasserhahn einfach installieren

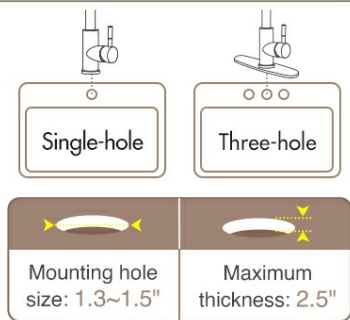


Figure 4: Product Accessories

Installation Requirements

- **Mounting Hole:** Designed for a single hole installation. For three-hole sinks, an optional deck plate (not included) can be used.
- **Pre-drilled Hole Size:** 1.3" - 1.7" diameter.
- **Maximum Deck Thickness:** 1.9".
- **Cabinet Height:** Reserved space for the faucet requires an installation height of at least 21 inches from the cabinet.

Tubular hole



Cold&Hot Supply Hose



Figure 5: Installation Hole Requirements

Installation Steps

1. **Insert Hoses:** Insert the hot/cold water supply hoses into the faucet body.
2. **Secure Nut:** Install and tighten the nut at the bottom of the faucet.
3. **Position Faucet:** Insert the assembled faucet into the pre-drilled hole on the counter.
4. **Tighten Components:** Install the metal gasket, rubber gasket, and screw cap in sequence, then tighten them securely from underneath the counter.
5. **Connect Water Supply:** Connect the hot/cold water supply hoses to the corresponding water supply valves.

Figure 6: Faucet Installation Steps

OPERATING INSTRUCTIONS

Water Flow and Temperature Control

The faucet features a single handle for controlling both water flow and temperature. Move the handle up to increase flow and down to decrease. Move it left for hot water and right for cold water.

Dual Spouts and Sprayer Modes

This faucet is equipped with two independent spouts: a fixed pot filler and a pull-down sprayer. Both spouts can rotate 360 degrees for full sink access.

- **Pull-Down Sprayer:** The sprayer offers two jet types:
 - **Spray Mode:** Provides wider, gentler coverage, ideal for rinsing.
 - **Stream Mode:** Delivers a more powerful, focused water flow, suitable for filling.
- **Buckle Lock System:** The pull-down sprayer features a unique Buckle Lock system. This allows you to lock the sprayer in the desired mode (spray or stream) without continuously holding the button, freeing your hands for other tasks.
- **Fixed Pot Filler:** Use the separate fixed spout for filling pots or for stubborn messes. Each nozzle has its own control handle.

- You can buy the base plate from our store, which can be installed with one hole or three holes

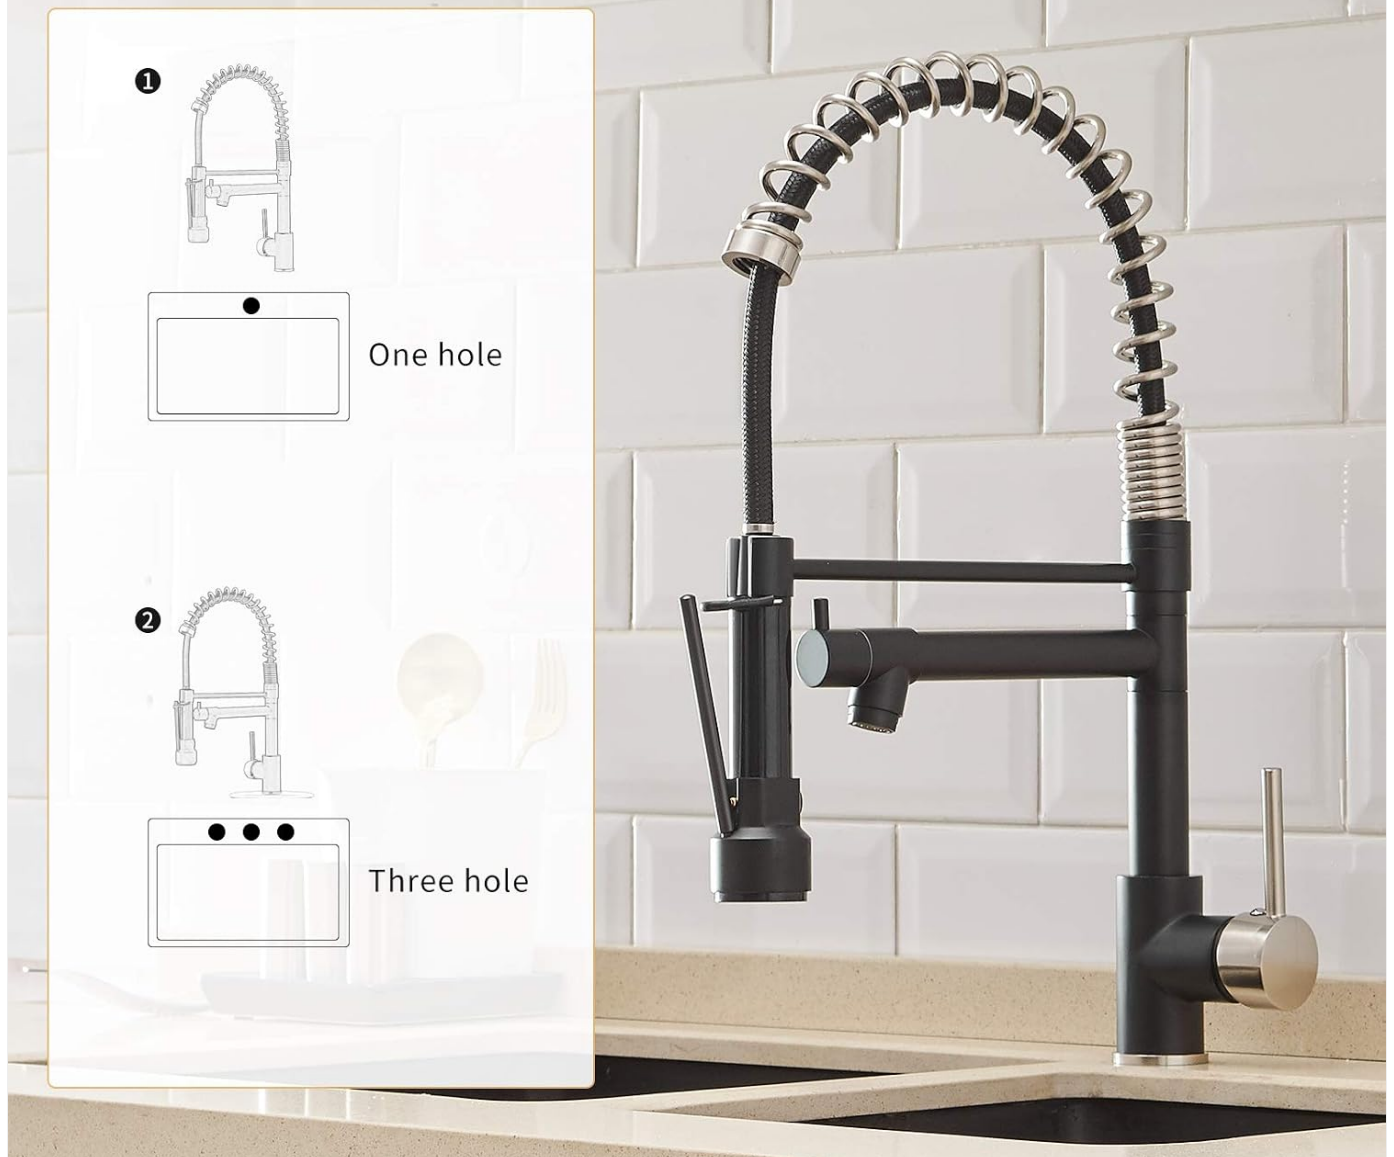


Figure 7: Dual Sprayer Modes (Spray and Stream)

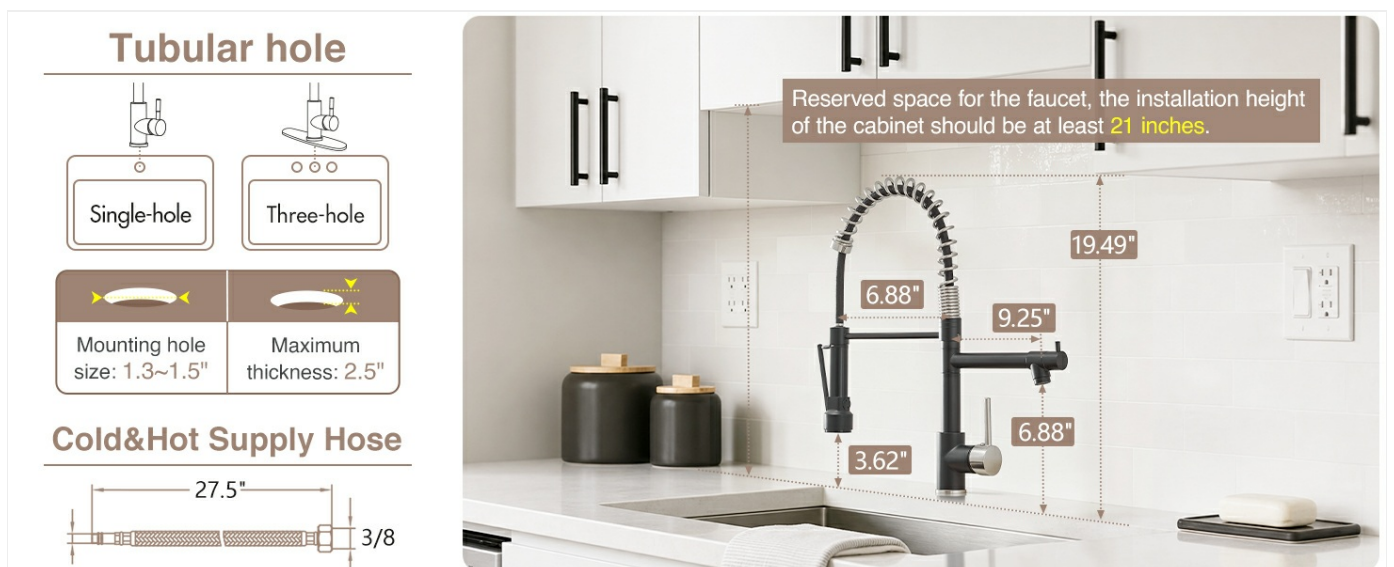


Figure 8: Sprayer Mode Locking and Stream Mode Operation

Video Demonstration

Your browser does not support the video tag.

Video 1: Demonstration of the matte black faucet's features and operation by Aimadi sanitary.

MAINTENANCE

Regular maintenance will ensure the longevity and optimal performance of your AIMADI faucet.

- **Cleaning:** Clean the faucet regularly with a soft cloth and mild soap. Avoid abrasive cleaners, harsh chemicals, or scouring pads, as these can damage the finish.
- **Preventing Mineral Build-up:** Wipe the nozzles of the sprayer head after each use to prevent mineral deposits, especially in areas with hard water. If mineral build-up occurs, gently scrub with a soft brush and a vinegar solution.
- **Drip-Free Operation:** The built-in ceramic cartridge is designed for drip-free operation. If dripping occurs, consult the troubleshooting section or contact customer support.

TROUBLESHOOTING

If you encounter any issues with your faucet, please refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Low Water Flow	Clogged aerator or mineral deposits in the sprayer head.	Unscrew the aerator from the sprayer head and clean any debris. Soak in a vinegar solution if mineral deposits are present.
Faucet Drips	Worn out ceramic cartridge or loose connections.	Ensure all connections are tight. If dripping persists, the ceramic cartridge may need replacement. Contact customer support for assistance.
Sprayer Not Switching Modes	Debris in the sprayer mechanism or a faulty switch.	Clean the sprayer head thoroughly. If the issue continues, contact customer support.
Leaking from Base of Faucet	Loose mounting nut or damaged O-rings.	Tighten the mounting nut under the sink. Inspect and replace O-rings if damaged.

If you are unable to resolve the issue using these steps, please contact AIMADI customer support.

WARRANTY INFORMATION

The AIMADI Kitchen Sink Faucet comes with a limited warranty. For specific details regarding the warranty period and coverage, please refer to the warranty card included with your product or contact AIMADI customer support. Optional extended protection plans may be available for purchase from third-party providers. These plans are separate from the manufacturer's limited warranty.

CUSTOMER SUPPORT

For technical assistance, parts replacement, or any questions regarding your AIMADI Kitchen Sink Faucet, please contact our customer support team. Refer to the contact information provided in your product packaging or visit the official AIMADI website for support details. When contacting support, please have your model number (AM-3036N) and purchase date available.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question

and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question