


GE Enbrighten Z-Wave In-Wall Smart Switch 120/277V

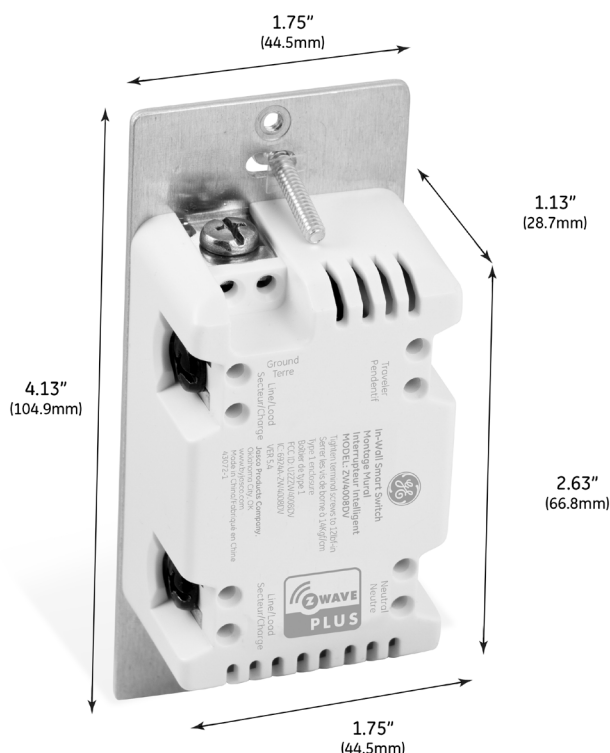

Specifications

Power: 120/277VAC, 60Hz **Signal frequency:** 908.4/916MHz

Maximum load:

120VAC: 960W incandescent, 1/2HP motor 1800W (15A resistive)

277VAC: 1385W incandescent, 1/2HP motor 1800W (15A resistive)

Range: Up to 150ft. from controller or closest Z-Wave device

Operating temperature: 32-104° F (0-40° C)

Warranty: 2-year limited product warranty

Requires neutral wire. Switch must be mounted indoors


Design Features

- QuickFit™ – Improved components reduce the housing depth by up to 20% compared to previous Z-Wave models and eliminated the need for heat tabs
- SimpleWire™ – Auto line-load sensing terminals support fast installation by detecting line and load wires and configuring the switch accordingly
- Dual ground ports, which are offset to avoid switch box mounting screws, support daisy-chaining in multi-switch setups
- Turn the connected device ON/OFF manually or via Z-Wave hub or controller
- Remotely monitor with any mobile device*
- Works with Google Assistant and Amazon Alexa (requires compatible hub*)
- May be used in single-pole installation or with up to five GE-branded model 46199 Add-on Switches in 3, 4, 5 or 6-way wiring configurations
- Works with all LED, CFL, incandescent and halogen bulbs
- Can be included in multiple groups and scenes
- Uses the Z-Wave firmware update meta data command class for standardized firmware updates over the air
- Supports advanced configuration — LED status, alternate exclusion
- Screw terminal installation — requires wiring connections for line (hot), load, neutral, and ground.
- Traveler wire required for multi-pole installation
- Uses a standard decora®-Leviton wallplate (wallplate not included)
- Interchangeable paddle — White & light almond paddle included
- Blue LED indicator shows switch location or status with four setting options – ON when load is OFF, ON when load is ON, always OFF or always ON
- In-line traveler circuit protection
- Z-Wave Plus certified


Z-Wave Plus with S2 Security and SmartStart Features

- Improved battery life and up to 50% greater wireless range
- QR codes with unique, industry-standard secure key exchange to add a layer of 128-bit encryption
- Effortless device pairing to Z-Wave S2 and SmartStart certified gateways
- Backward compatible with all generations of Z-Wave devices
- 250% faster processor
- 400% more memory
- 50% more energy efficient
- Supports wireless upgrades to future-proof your home


White/light almond paddles included




Single-Location Wiring

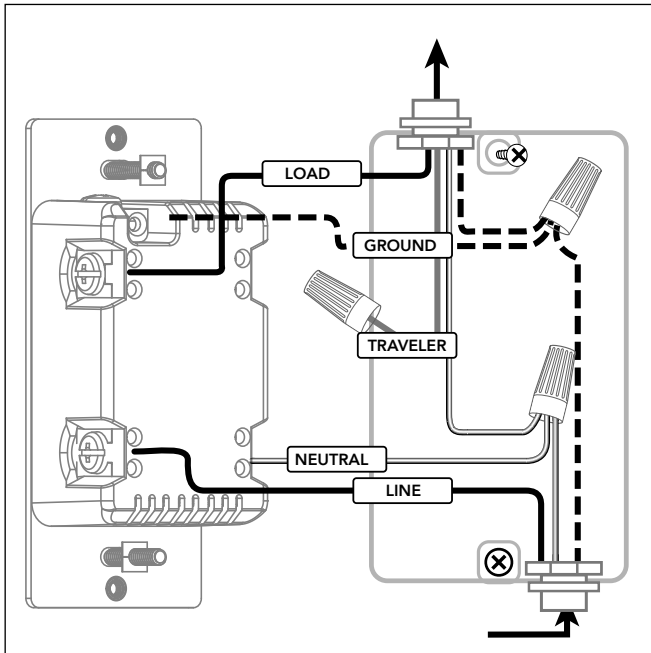

Space-Saving Screw Terminals

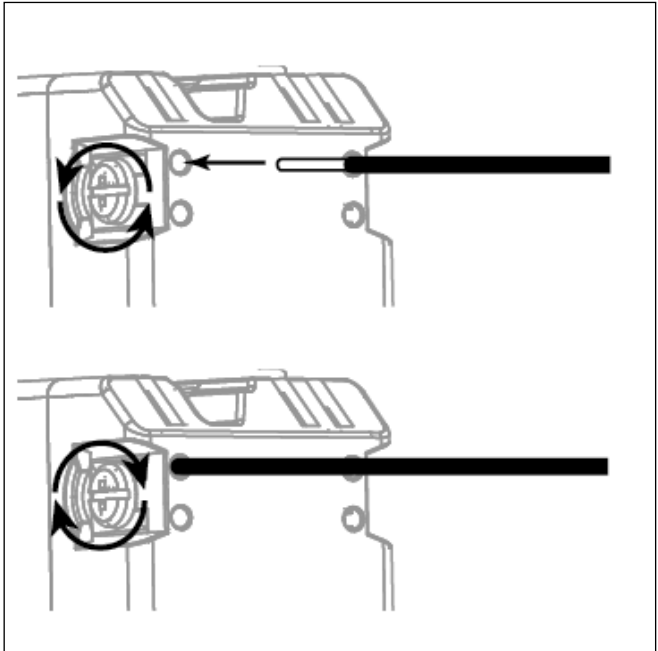

Multi-Location Wiring

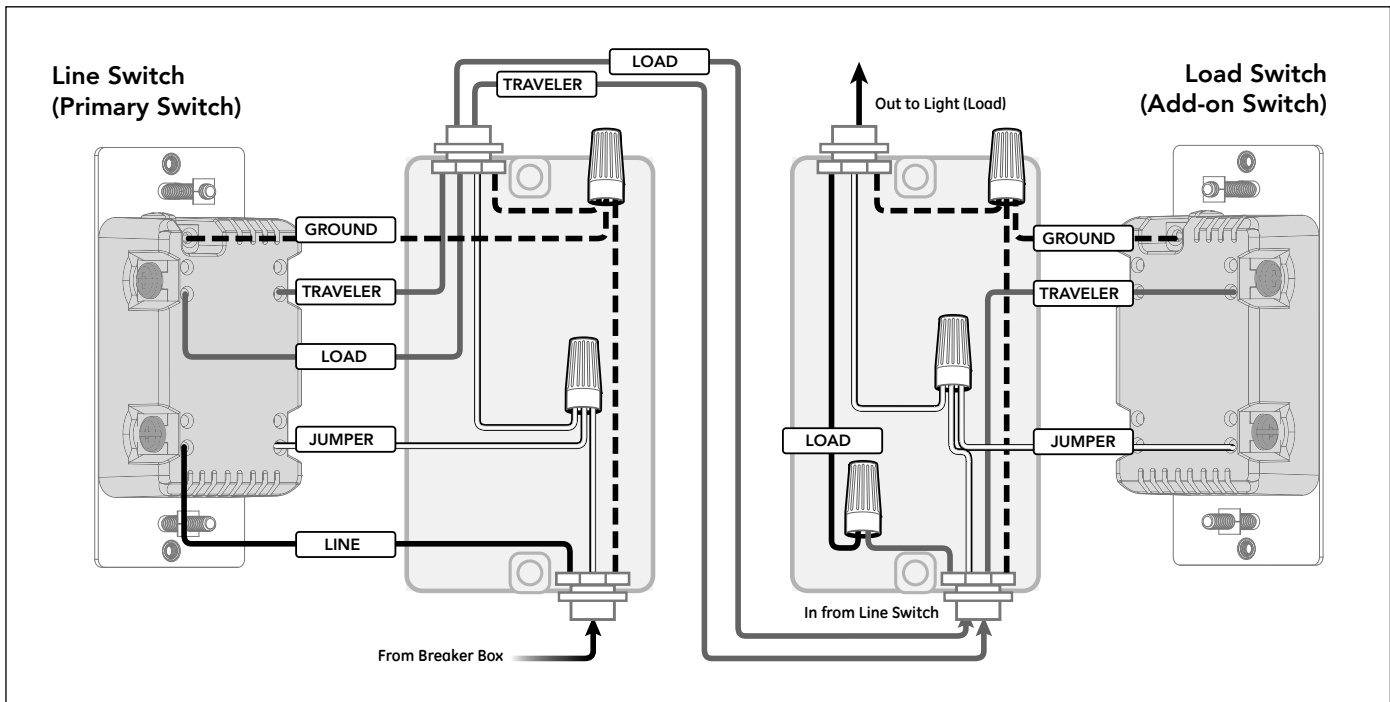

Installation Recommendations:

- Insert wire into port and tighten screw. Do not wrap wire around screw
- Indoor installation only
- Visit <http://www.ezwave.com/hubs> for hub compatibility
- Wallplates sold separately
- Trilingual instruction manual – English, French, Spanish

Device Configuration

Adding your device to a Z-Wave network


Once the hub is ready to add your smart switch, press and the top or bottom of the rocker on the smart switch.

To remove and reset the device

Once the controller is ready to remove your device, press the top or bottom of the rocker on the smart switch.

S2 + SmartStart install

The controller's app will indicate if it has discovers the device. If prompted by the controller to enter the S2 security code, refer to the QR code/security number on the side of the box or the QR code label on the product. Enter the 5-digit code.



To return to factory defaults

Quickly press the ON button three times, then press the OFF button three times. The LED will flash ON/OFF five times when completed.

Certifications & Compliances



Compliances, specifications and availability are subject to change without notice

Distributed by Jasco Products Company LLC
10 E. Memorial Rd., Oklahoma City, OK

©Jasco 2019

Light-Commercial Grade (120/277VAC)

Coming Soon



43073
0-10V Smart Dimmer



43074
120/277V Smart Toggle Switch

Coming Soon



43075
0-10V Smart Toggle Dimmer

Additional Paddle Colors



13940
Black Paddle



13943
Brown Paddle



13945
Ivory Paddle

Residential Grade (120VAC Only)



46199
Add-on Switch



46203
In-Wall Smart Dimmer



26931
In-Wall Smart Motion Switch



26933
In-Wall Smart Motion Dimmer



14288
In-Wall Smart Outlet



14287
In-Wall Smart Fan Control



14289
In-Wall Touch Dimmer



14299
In-Wall 1000W Smart Dimmer



46200
Add-on Switch



46201
In-Wall Smart Dimmer



46202
In-Wall Smart Switch



46204
In-Wall Smart Dimmer



32563
Smart Door Sensor



34172
Portable Wireless Solo Scene Remote



34174
Portable Wireless Duo Scene Remote



34176
Portable Wireless Quad Scene Remote