


Soundbar User Manual

What's in the Box?

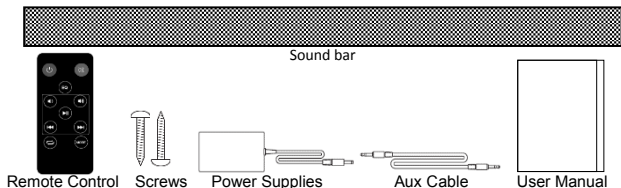

Connecting Your Sound Bar to Your TV or other sources:


Illustration of the Soundbar connectors for different connections:




EN	EN
HDMI-ARC	HDMI-ARC
OPTICAL	OPTICAL
LINE IN	LINE IN
DC IN	DC IN

1a Is an HDMI input jack on your TV labeled "ARC"?


1b Don't have ARC or Optical output available on your TV?



Use HDMI cable (V1.4 above) to connect the sound bar to the TV ARC socket.



Use Optical cable to connect the sound bar to the TV, DVD player or set top box.




Connecting the sound bar identified LINE IN to the TV with the provided AUX cable.

NOTE: All cables what you needed should be plugged in before Power Supplies connected.

2 Connect the Power Supplies to Sound Bar then power Insert Power Supplies to an AC outlet.



A red LED will pulse on the front of the sound bar indicating boot up.



3 Turn on your sound bar.

Placing the Soundbar on a flat and solid surface. Hold the Power button **U/MODE** at the right side of the sound bar or Press **RED** key on the remote control to turn it on. Selecting Mode (input source) as the following instruction to enjoy your powerful sound. When the Soundbar is switched to standby, the red dot is turned on.

NOTE: 1. RESET: Hang up is solved by disconnecting and reconnected the power supplies.

2. It will be standby within 10 minutes if no signal from Line In, BT, USB, ARC and Optical inputs. It also will be standby if the low sound from Line In need to be heard within about 15cm distance.

The control panel on the Soundbar:



Symbol	Operation	
	Hold	Press
/MODE	Power On/ Standby	Toggle the Mode change: LINE IN → Bluetooth → USB Drive → ARC → Optical
/ MUTE		Pause/Play (USB/Bluetooth Mode) Mute / No Mute
VOL+ /	Volume up	Next USB Drive/Bluetooth Song
VOL- /	Volume down	Next USB Drive/Bluetooth Song.

Remote control buttons



	Switch the product on or to standby
	Mute or restore volume
EQ	Equalizer: Eq0 : Normal, Eq1 : Rock, Eq2 : Pop, Eq3 : Classic, Eq4 : Jazz, Eq5 : Country, Eq6 : Music
	Decrease volume
	Increase volume
	Skip to previous audio file during USB/BT play
	Pause or play USB/BT audio file
	Skip to next audio file during USB/BT play
	Repeat audio during USB play
MODE	Select an audio source *

*MODE (source) selection shown on the LED display.

	Line In source
	Bluetooth source ● Flashes if the Soundbar is not paired or connected to a bluetooth device. ● Lights up if the Soundbar is paired.
	USB source when connecting to a USB drive
	HDMI-ARC source
	Optical In source

Importance Notice for soundbar mounting on the wall:

- 1) Wall-mounted installation must be carried out by qualified personnel only. Incorrect assembly can result in severe personal injury and property damage! (If you intend to install this product yourself, you must check for installations such as electrical wiring and plumbing, which may be hidden inside or behind the wall.)
- 2) It is the installer's responsibility to verify and confirm that the wall will safely support the total load of the unit and wall brackets.
- 3) Additional tools (not included) are required for the installation.
- 4) Do not overtighten screws.
- 5) Use an electronic stud finder to check the wall type before drilling and mounting
- 6) The proposed height on the wall is 1.0~1.5meters
- 7) The strain relief (<23mm) of HDMI cable is recommended for more space during mounting.

Technical Specifications

Power consumption:	40W
Max output power:	40W
Working temperature:	0~35 °C
Bluetooth version:	5.1
Operating frequency range:	2402-2480Mhz
Soundbar measurement:	80cm * 6cm * 6cm
Bluetooth name:	DSB-4020

Power Supplies Information:

Manufacturer:	SHENZHEN FIT-POWER TECHNOLOGY CO., LTD.
Commercial registration number:	91440300577672653M
Address:	201, NO.7 RIFU ROAD, EAST DISTRICT, BAISHIXIA COMMUNITY, FUYONG, BAOAN SHENZHEN
Trade mark	FIT-POWER
Model:	TP04-180200E
Input voltage:	100-240V~
Input AC frequency:	50/60Hz
Output voltage:	DC18V
Output current:	2.0A
Output power	36W
Max output power:	54W
Average active efficiency:	87%
Efficiency at low load (10%):	82%
No-load power consumption:	0.1W or less

and omissions in the manual.

ALL RIGHTS RESERVED, COPYRIGHT DENVER ELECTRONICS A/S

DENVER®

www.denver-electronics.com



Electric and electronic equipment and included batteries contains materials, components and substances that can be hazardous to your health and the environment, if the waste material (discarded electric and electronic equipment and batteries) is not handled correctly.

Electric and electronic equipment and batteries is marked with the crossed out trash can symbol, seen above. This symbol signifies that electric and electronic equipment and batteries should not be disposed of with other household waste, but should be disposed of separately.

As the end user it is important that you submit your used batteries to the appropriate and designated facility. In this manner you make sure that the batteries are recycled in accordance with legislature and will not harm the environment.

All cities have established collection points, where electric and electronic equipment and batteries can either be submitted free of charge at recycling stations and other collection sites, or be collected from the households. Additional information is available at the technical department of your city.

Hereby, Inter Sales A/S declares that the radio equipment type DSB-4020 is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: www.denver-electronics.com and then click the search ICON on topline of website. Write model number: DSB-4020. Now enter product page, and red directive is found under downloads/other downloads.

Operating Frequency Range: 2402-2480Mhz

Max Output Power: 40W

DENVER ELECTRONICS A/S

Omega 5A, Soeflen

DK-8382 Hinnerup

Denmark

www.facebook.com/denverelectronics