

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Zomagas](#) /

› [Zomagas 30-inch Wall Mount Kitchen Hood Instruction Manual \(Model ZMS-0275\)](#)

Zomagas ZMS-0275

Zomagas 30-inch Wall Mount Kitchen Hood Instruction Manual

Model: ZMS-0275

INTRODUCTION

Thank you for choosing the Zomagas 30-inch Wall Mount Kitchen Hood. This manual provides essential information for the safe and efficient installation, operation, and maintenance of your new range hood. Please read these instructions thoroughly before use and retain them for future reference.

This stainless steel range hood is designed to effectively remove smoke, grease, and cooking odors from your kitchen, ensuring a cleaner and more comfortable cooking environment. It features a powerful 700 CFM motor, energy-saving LED lighting, and intuitive soft-touch controls with a delayed shutdown function.

SETUP AND INSTALLATION

The Zomagas Wall Mount Kitchen Hood is designed for wall-mounted installation and can be configured for both ducted and ductless operation. For ductless use, an optional Carbon Filter Kit (Part #CFZMG13) is required and sold separately.

Included Components:

- Chimney
- Grease Filters (Baffle Filters)
- Prong Plug
- Flexible Duct Pipe (for ducted installation)
- Draft Damper Flaps
- Bag of Mounting Screws
- Wall Bracket

Installation Considerations:

- The chimney cover is adjustable, suitable for ceilings between 7.5 feet and 9 feet. An upper chimney cover extension is available separately for 10-foot ceilings.
- Ensure all protective blue plastic film is removed from the stainless steel surfaces before final installation to

prevent residue.

30 Inch Wall Mount Range Hood

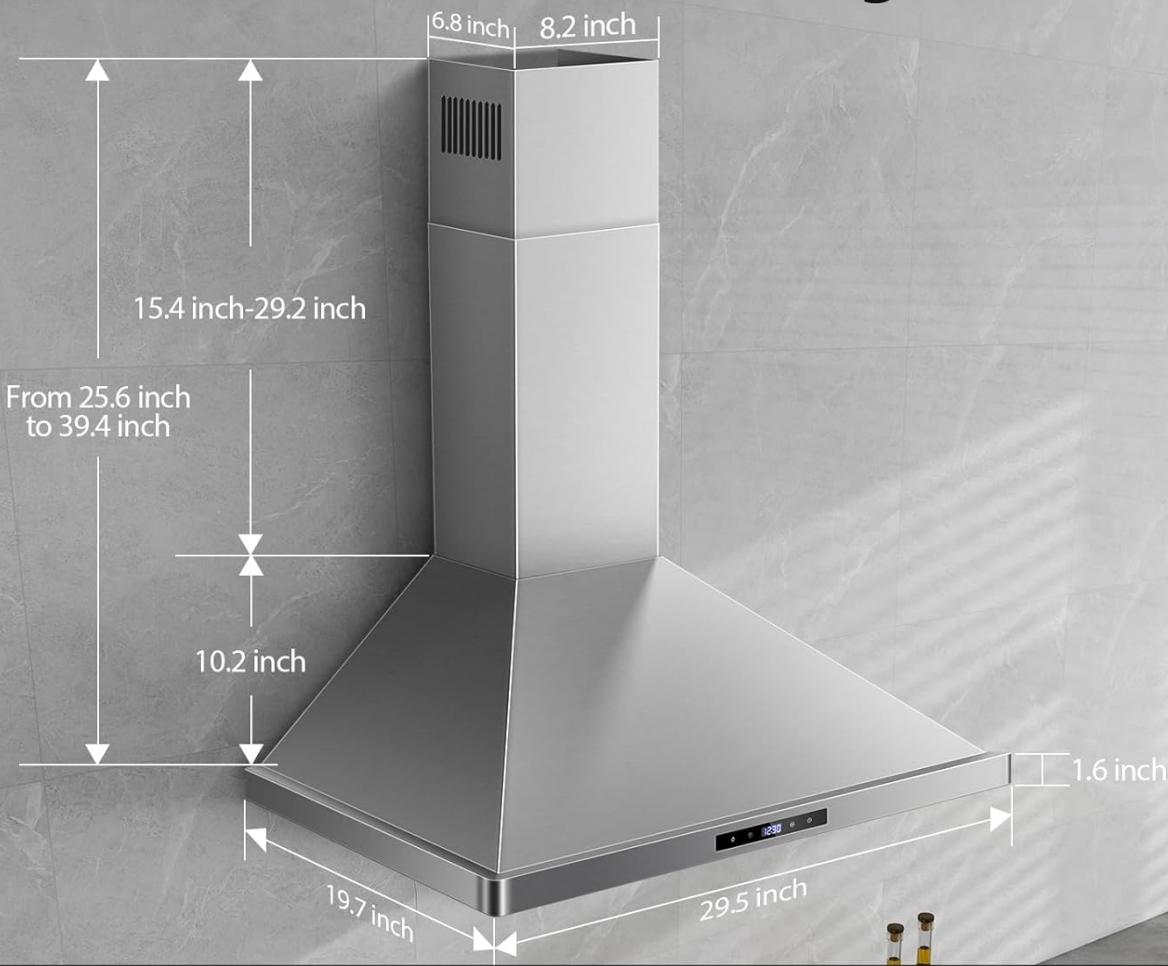


Figure 1: Dimensions and Included Components



Figure 2: Ducted and Ductless Installation Options

OPERATING INSTRUCTIONS

The Zomagas Kitchen Hood features a user-friendly soft-touch control panel with an LCD display for easy operation.

Control Panel Functions:

- Light On/Off Button:** Activates or deactivates the energy-saving LED lights.
- Timer Button:** Engages the delayed shutdown function, allowing you to set a timer for 1-60 minutes after cooking to clear residual smoke.
- Speed Buttons (+/-):** Adjusts the fan speed across three levels (Low, Medium, High) to suit different cooking needs.
- Power On/Off Button:** Turns the range hood on or off.

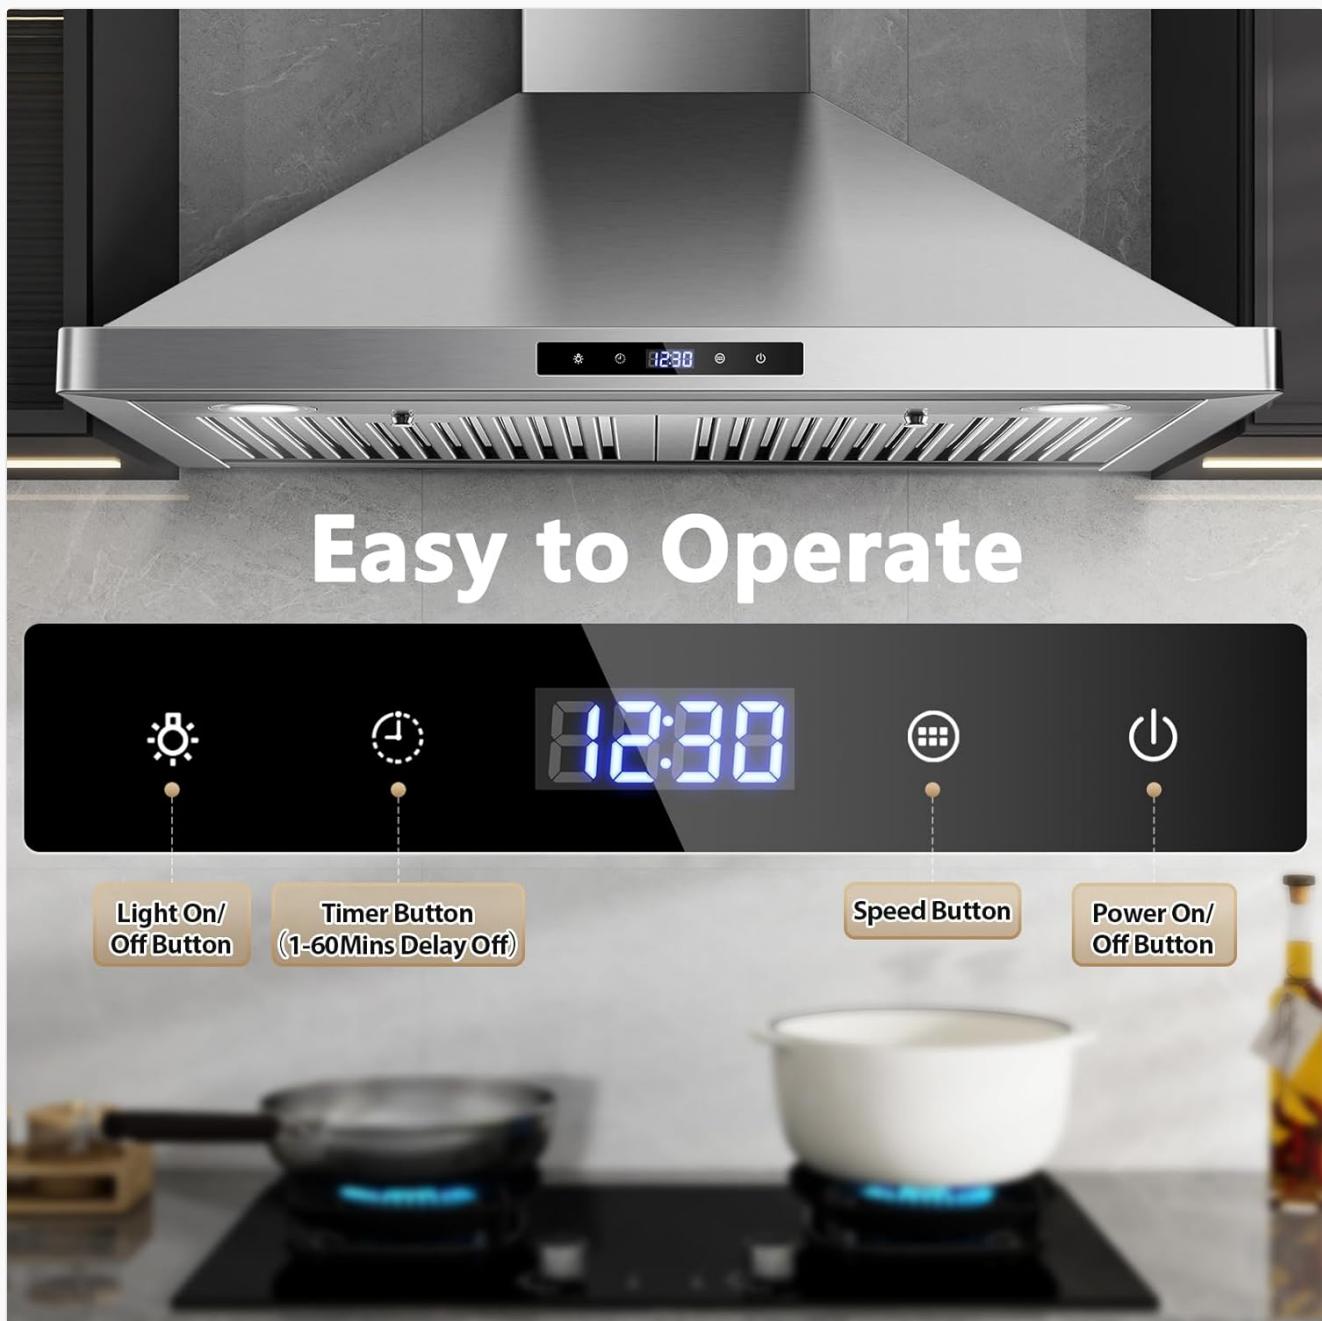


Figure 3: Soft Touch Control Panel

Delay Shutdown Function: 1-60 mins Adjustable Delay



Figure 4: Delayed Shutdown Function



Figure 5: Fan Speed Settings for Various Cooking Tasks

MAINTENANCE

Regular maintenance ensures optimal performance and longevity of your range hood.

Cleaning the Baffle Filters:

The stainless steel baffle filters are designed for easy removal and are dishwasher-safe. To clean:

1. Locate the release latches on each filter.
2. Push the latch and gently pull down to release the filter.
3. Wash the filters by hand with warm, soapy water or place them in a dishwasher.
4. Ensure filters are completely dry before re-installing.

Cleaning the Stainless Steel Surface:

The range hood is constructed from premium 430-grade, 20-gauge brushed stainless steel, which is resistant to fingerprints and easy to clean. Use a soft cloth with a non-abrasive stainless steel cleaner. Always wipe in the direction of the grain.



Figure 6: Dishwasher-Safe Baffle Filters and Stainless Steel Construction

TROUBLESHOOTING

This section provides general guidance for common issues. For specific problems not addressed here, please refer to the detailed troubleshooting section in the full product manual or contact customer support.

- **No Power:** Check if the power cord is securely plugged into a working outlet. Verify the circuit breaker.
- **Fan Not Operating:** Ensure the power is on and the fan speed is selected. Check for any obstructions in the fan or ductwork.
- **Poor Suction:** Clean the baffle filters. For ductless models, check if the carbon filters need replacement. Ensure ductwork (if ducted) is clear and properly sealed.
- **Excessive Noise:** Check for loose parts, obstructions in the fan, or improper installation of filters.

SPECIFICATIONS

Feature	Specification
Brand	Zomagas
Model Number	ZMS-0275
Air Flow Capacity	700 Cubic Feet Per Minute (CFM)
Material	Stainless Steel (430 Grade, 20-Gauge)
Noise Level	65 Decibels
Mounting Type	Wall Mount
Controls Type	Touch
Voltage	120 Volts
Number of Speeds	3
Item Weight	27.8 pounds (12.66 Kilograms)
Product Dimensions	19.7"D x 29.5"W x 39.4"H
Light Source Type	LED
Filter Type	Baffle
Ventilation Type	Exhaust (Ducted/Ductless Convertible)
Special Features	Delayed Shutdown Function, Dishwasher-Safe Baffle Filters
UPC	710748697386

WARRANTY AND SUPPORT

Specific warranty details are not provided in the product information. Please refer to the warranty card included with your product or contact Zomagas customer support for detailed warranty information and service inquiries.

For technical assistance, replacement parts, or any questions regarding your Zomagas Wall Mount Kitchen Hood, please contact the manufacturer directly. Contact information can typically be found in the packaging or on the

official Zomagas website.

© 2024 Zomagas. All rights reserved.