


PlusBox 301 Quick Start Guide

Note:

Before you can use Anlagen-Anschluss Plus, you need to activate and to configure PlusBox 301. Detailed instructions on how to achieve this are available at www.vodafone.de/aaplus-support.

Connecting devices

Connect PlusBox 301 as follows with the telephone socket (TAE) and with your ISDN PBX, for **ISDN Voice + Data additionally with your network devices** (further details see Chapter 2 of the user manual):

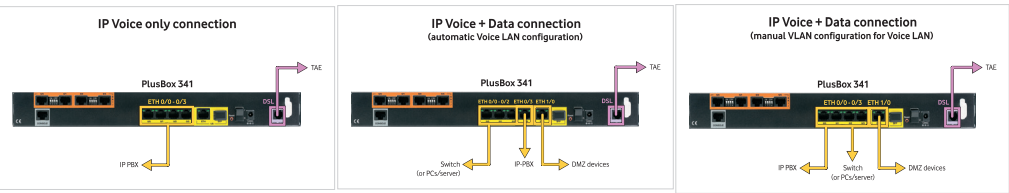


Setting up the configuration computer for DHCP

The computer you want to use to configure PlusBox 301 must obtain its IP address dynamically via **DHCP** (Dynamic Host Configuration Protocol). This is the **default setting** which is preassigned to most computers. If this is not the case with your configuration computer, configure it using the following **TCP/IP properties** (details see Section 5.1 of the user manual):



Parameter	Auswahl
IPv4 address	Obtain an IP address automatically
DNS server address	Obtain DNS server address automatically

Activating and setting up PlusBox 301



1. Connect one of the **ETH 0/0 to ETH 0/3 ports** of PlusBox 301 – **exclusively Port ETH 0/3 for automatic IP Voice + Data connection!** – via the yellow LAN cable with a LAN port of your configuration computer if you have not already done so.
2. Open the Internet browser and enter **http://192.168.2.1** or **plus.box**.
3. Enter **Username** and **Password** (see PlusBox 301 underside), confirm with **Log in**:

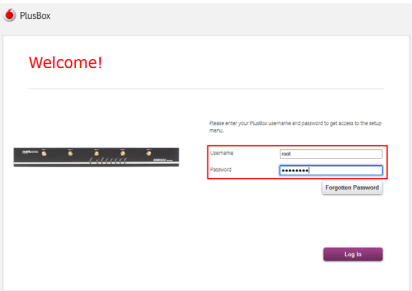



4. Follow the instructions of the **activation wizard** that opens, enter the 22-digit **Modem Installation Code (MIC)** from your welcome letter, click **Continue** and continue following the wizard's instructions.
5. On the **Setup** page, **Skip** configuration storing option and continue following the wizard's instructions.

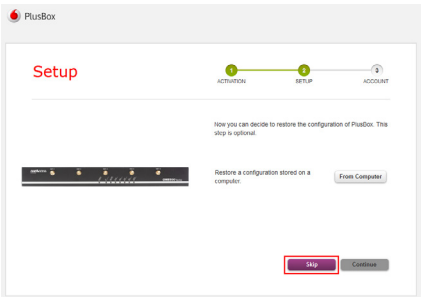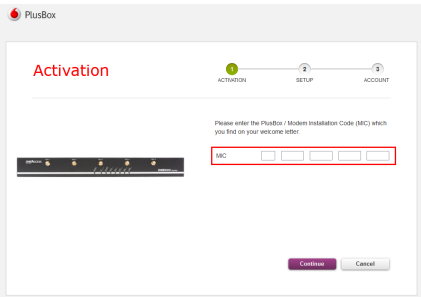

6. **Exclusively for IP Voice + Data: switch on** (move slider to the right) and set up **WiFi network**:
7. **Exclusively for IP Voice + Data:** enter **WiFi Name**, choose protection mode **WPA2 PSK** (recommended) and **Band Selection**, then change **WiFi Password** (in the window popping up).

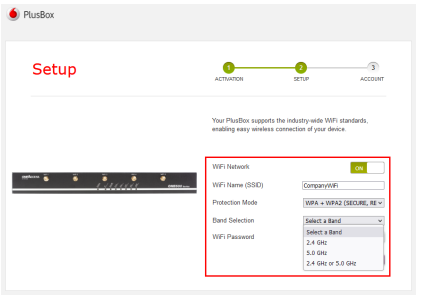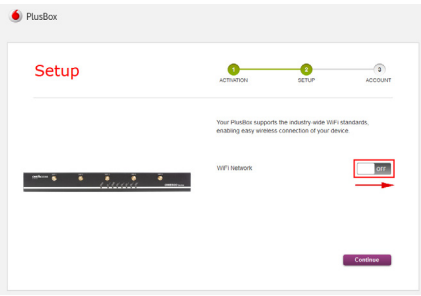

8. Continue following the wizard's instructions, then **change password**.
9. Confirm message in the final page of the wizard with **OK**.

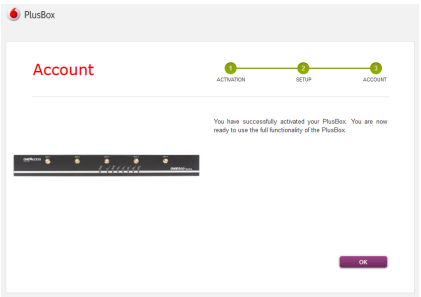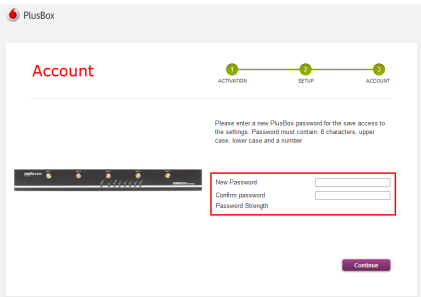

PlusBox 301 is now prepared for Voice service operation with Anlagen-Anschluss Plus **as well as for Internet access (applies to IP Voice + Data exclusively)**. You can check the PlusBox 301 status on its Status page, see Section 6.5.1 of the user manual.