



Manuals.plus /

› WilTec /

› Wiltec Bicycle Cargo Trailer Model 62792 User Manual

WilTec 62792

Wiltec Bicycle Cargo Trailer User Manual

Model: 62792 | Brand: WilTec

INTRODUCTION

This manual provides essential information for the safe and efficient use of your Wiltec Bicycle Cargo Trailer. Please read these instructions carefully before assembly and operation. Keep this manual for future reference.

The Wiltec Bicycle Cargo Trailer is designed for transporting goods by bicycle, featuring a robust steel frame, high-quality PU fabric, and a wheel protection frame. It supports a maximum load of 65 kg and includes a quick coupling for easy attachment and a foldable drawbar for convenient storage.

SAFETY INSTRUCTIONS

Always prioritize safety when operating the bicycle cargo trailer. Failure to follow these instructions may result in injury or damage.

- **Maximum Load Capacity:** Do not exceed the maximum load capacity of 65 kg. Overloading can compromise stability and control.
- **Secure Cargo:** Always secure your cargo properly to prevent shifting during transit. Use the provided cover and additional straps if necessary.
- **Visibility:** Ensure the trailer's reflectors are clean and visible, especially when riding in low light conditions. Consider adding additional lighting for enhanced safety.
- **Braking Distance:** Be aware that towing a trailer increases your bicycle's braking distance. Adjust your speed accordingly.
- **Turning Radius:** The trailer will increase your turning radius. Exercise caution when making turns, especially in congested areas.
- **Tire Pressure:** Regularly check the tire pressure of both your bicycle and the trailer to ensure optimal performance and safety.
- **Maintenance:** Perform regular checks on all connections, bolts, and moving parts to ensure they are secure and in good working order.
- **Children/Pets:** This trailer is designed for cargo transport only. Do not transport children or pets.

PACKAGE CONTENTS

Please verify that all components are present before beginning assembly:

- Trailer frame (main body)
- Two wheels (approx. 40 cm diameter)
- Drawbar with quick coupling mechanism
- Wheel protection frame
- PU fabric cargo compartment
- Cargo cover with Velcro closure
- Assembly hardware (bolts, nuts, pins)
- User Manual

ASSEMBLY INSTRUCTIONS

Follow these steps to assemble your Wiltec Bicycle Cargo Trailer:

1. **Unpack Components:** Carefully remove all parts from the packaging and lay them out on a clean, flat surface.
2. **Attach Wheels:**
Insert the wheel axles into the designated slots on the trailer frame. Secure them with the provided pins or quick-release mechanisms. Ensure wheels spin freely and are securely attached.



Image: Detail of the wheel assembly, showing the tire and yellow reflector.

3. Install Wheel Protection Frame:

Attach the wheel protection frame to the main trailer body using the appropriate hardware. This frame helps prevent objects from interfering with the wheels.

4. Secure Fabric Cargo Compartment:

Drape the PU fabric cargo compartment over the frame and secure it using the integrated fasteners or straps. Ensure it fits snugly.

5. Attach Drawbar:

Connect the drawbar to the front of the trailer frame. Ensure the connection is firm and all locking pins or bolts are engaged. The drawbar can be folded under the trailer for storage.



Image: Detail of the drawbar and quick coupling attachment point.

6. **Final Check:** Before first use, double-check all connections, bolts, and moving parts to ensure they are securely fastened.

OPERATING INSTRUCTIONS

Proper operation ensures the longevity and safety of your cargo trailer.

1. **Attaching to Bicycle:**

Use the quick coupling mechanism on the drawbar to attach the trailer to the rear axle of your bicycle. Ensure the coupling is fully engaged and secured according to the mechanism's design. A safety strap or pin may be present for additional security.

2. **Loading Cargo:**

Distribute weight evenly within the cargo compartment. Place heavier items at the bottom and center of the trailer. Do not exceed the 65 kg maximum load capacity. Secure all items to prevent movement during transit.



Image: Interior view of the cargo area with approximate dimensions for loading.

3. Using the Cargo Cover:

Place the cargo cover over the loaded compartment and secure it using the Velcro fasteners. This protects your goods from weather and keeps them contained.

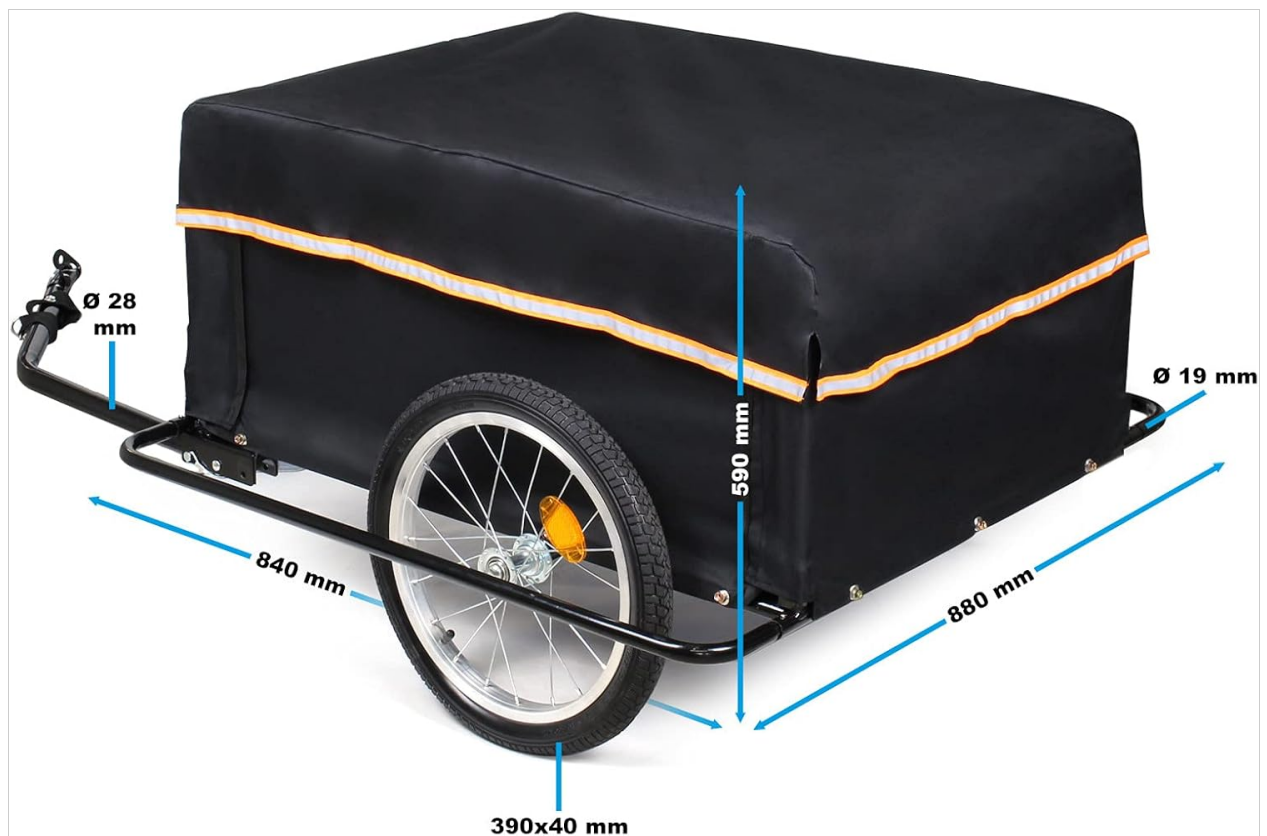


Image: The trailer with its protective cover, illustrating its overall dimensions.

4. Riding with the Trailer:

Ride cautiously, especially when turning or braking. Be mindful of the increased length and width of your bicycle with the trailer attached. Avoid sudden movements.

5. Folding for Storage:

When not in use, the drawbar can be loosened and folded underneath the trailer body to reduce its footprint for storage. The wheels may also be easily removed for more compact storage.



Image: The trailer shown in a compact, folded configuration for storage.

MAINTENANCE

Regular maintenance will extend the life of your trailer and ensure safe operation.

- **Cleaning:** Clean the fabric and frame with mild soap and water. Avoid harsh chemicals that may damage materials.
- **Lubrication:** Periodically lubricate moving parts such as wheel axles and coupling mechanisms.
- **Fasteners:** Check all bolts, nuts, and pins regularly and tighten if necessary.
- **Tires:** Inspect tires for wear, punctures, and proper inflation. Replace worn tires as needed.
- **Storage:** Store the trailer in a dry, protected area when not in use to prevent rust and material degradation.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Trailer wobbles or feels unstable	Uneven cargo distribution; loose wheel connections; low tire pressure.	Redistribute cargo evenly. Check and tighten wheel connections. Inflate tires to recommended pressure.
Difficulty attaching/detaching coupling	Coupling mechanism is dirty or stiff; incorrect alignment.	Clean and lubricate the coupling mechanism. Ensure proper alignment with the bicycle's rear axle.
Cargo cover does not stay closed	Velcro fasteners are dirty or worn.	Clean Velcro fasteners. If worn, consider replacing the cover or using additional straps.

SPECIFICATIONS

Model Number	62792
Brand	WilTec
Product Dimensions (L x W x H)	139 x 88 x 60 cm
Item Weight	11.56 kg
Maximum Load Capacity	65 kg
Frame Material	Alloy Steel
Cargo Compartment Material	PU Fabric
Tire Diameter	Approx. 40 cm
Cover Closure Type	Velcro
Country of Origin	China

WARRANTY AND SUPPORT

For warranty information, technical support, or to inquire about replacement parts, please contact WilTec customer service. Refer to your purchase documentation for specific warranty terms and contact details.

Manufacturer: Wiltec

Seller: Wiltec Wildanger Technik GmbH

Return Policy: 30 days for refund/replacement (as per Amazon's policy at time of data extraction).