



# ZE1

## Wireless Switch

When an emergency occurs, press the wireless switch to call for help through the gateway. The gateway alarms locally and pushes the message to the user APP. The button supports recognition of single click, double click, and press and hold actions. It can be set to control the arming and disarming status of the home, or it can be used as an intelligent button to link with IMOU's intelligent devices.

### One-click alarm

Click the alarm button to trigger an emergency call



### Flexible placement

Small and flexible, stick and use



### Alarm message push

When the button is pressed, the app will receive an alarm push notification.



### Low battery reminder

When the battery is too low, the device reports a prompt message



### Smart scene linkage


Interconnect with other smart home devices, such as IPC and light bulbs.



### Long standby

Low-power design allows the device to work for over 2 years

## Overview

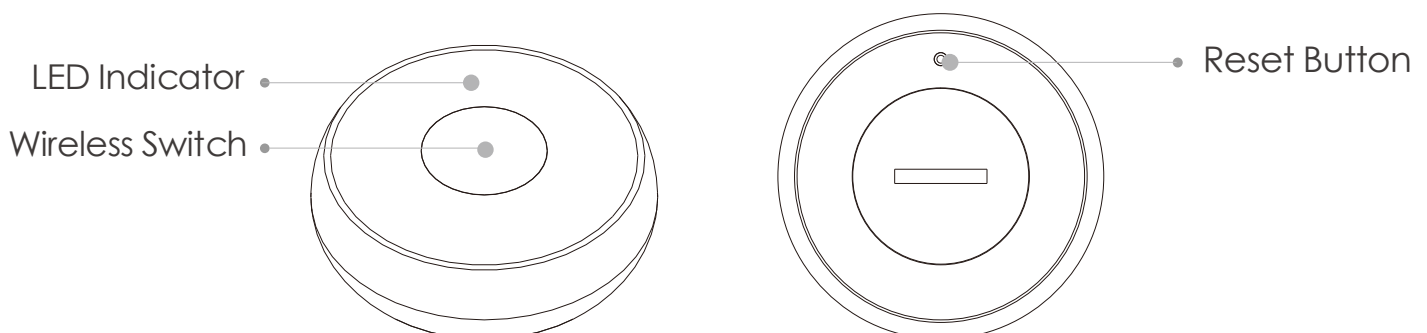

## Specifications

---

### General

Appearance size:  $\Phi 50 \times 16 \text{mm}$

Working voltage: DC 3V

Standby current:  $\leq 10 \mu\text{A}$

Working current:  $\leq 30 \text{mA}$

Low pressure alarm :  $2.6 \pm 0.2 \text{V}$

Operatign temperature:  $-14^{\circ}\text{F}$  to  $+131^{\circ}\text{F}$

Battery life:  $> 2$  years(20 times/day)

Weight: 23g

### Network

Wireless protocol: Zigbee

Transmit frequency: 2.4GHz

Transmit power:  $\leq 15 \text{dBm}$

Communication distance: 200m

## What's in the box

---

- 1x Wireless Switch
- 1x 3M Sticker
- 1x Card Needle

- 1x Rounded Pick
- 1x Quick Start Guide

