

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [NKD](#) /

› [NKD Team Stunt Scooter User Manual](#)

NKD Team Stunt Scooter

NKD Team Stunt Scooter User Manual

Model: Team Stunt Scooter

INTRODUCTION

Welcome to the NKD Team Stunt Scooter user manual. This guide provides essential information for the safe assembly, operation, maintenance, and troubleshooting of your new stunt scooter. Please read this manual thoroughly before first use to ensure optimal performance and rider safety.



Image: Side view of the NKD Team Stunt Scooter, showcasing its gold and black design.

SAFETY INFORMATION

Riding a stunt scooter can be dangerous. Always prioritize safety.

- **Wear Protective Gear:** Always wear a helmet, knee pads, elbow pads, and wrist guards.
- **Check Before Each Ride:** Ensure all bolts are tight, wheels spin freely, and the brake functions correctly.
- **Ride in Safe Environments:** Use the scooter in designated areas, away from traffic, pedestrians, and hazardous obstacles.
- **Supervision:** Younger riders should always be supervised by an adult.

- **Weight Limit:** Do not exceed the maximum weight limit of 220 pounds (approximately 100 kg).
- **Weather Conditions:** Avoid riding in wet or icy conditions, as this can reduce traction and braking effectiveness.

SETUP INSTRUCTIONS

The NKD Team Stunt Scooter requires minimal assembly. Follow these steps to prepare your scooter for use.

1. **Unpack Components:** Carefully remove all parts from the packaging. Verify that all components are present: deck, fork, handlebars, wheels, and necessary hardware.
2. **Install Front Wheel:** Attach the front wheel to the fork using the provided axle and spacers. Ensure bearings are properly seated.
3. **Attach Fork to Deck:** Insert the fork's steerer tube into the head tube of the deck. Ensure the headset bearings are correctly positioned.
4. **Secure Compression System:** Install the compression system (e.g., HIC or SCS) according to the specific design of your scooter. This typically involves a shim, top cap, and compression bolt.
5. **Install Handlebars:** Slide the handlebars onto the steerer tube. Align the handlebars with the front wheel.
6. **Tighten Clamp:** Secure the handlebars in place by tightening the clamp bolts evenly and firmly.
7. **Install Rear Wheel and Brake:** Attach the rear wheel to the deck, ensuring the brake mechanism is correctly aligned and functional.
8. **Final Check:** Double-check all bolts and connections to ensure they are tight and secure before riding.

Your browser does not support the video tag.

Video: Detailed animation demonstrating the assembly of the NKD Team Stunt Scooter components, including wheels, bearings, fork, handlebars, and brake.



Image: Close-up of the scooter's strong aluminum deck, highlighting its robust construction.

OPERATING INSTRUCTIONS

Once assembled and safety checked, your NKD Team Stunt Scooter is ready for use.

- **Stance:** Place one foot on the deck, slightly forward, and use the other foot to push off the ground.
- **Steering:** Lean your body and gently turn the handlebars in the desired direction.
- **Braking:** Apply pressure to the flex fender brake located above the rear wheel with your foot to slow down or stop.
- **Tricks:** For advanced maneuvers, ensure you have adequate space and proper protective gear. Start with basic tricks and gradually progress.

Your browser does not support the video tag.

Video: Riders demonstrating various stunts and maneuvers with the NKD Team Stunt Scooter in a skate park and urban environment.



Image: Two riders airborne on their NKD stunt scooters, demonstrating dynamic use.

MAINTENANCE

Regular maintenance ensures the longevity and safety of your NKD Team Stunt Scooter.

- **Clean Regularly:** Wipe down the scooter with a damp cloth after use to remove dirt and debris. Avoid harsh chemicals.
- **Check Bolts:** Periodically inspect and tighten all bolts, especially those on the clamp, wheels, and fork. Loose bolts can affect performance and safety.
- **Wheel and Bearing Inspection:** Check wheels for wear and tear. Ensure bearings spin smoothly. Replace worn wheels or noisy bearings as needed.
- **Brake Functionality:** Test the brake regularly to ensure it engages effectively. Adjust or replace if it feels loose or ineffective.
- **Grip Tape:** Clean grip tape with a stiff brush to maintain traction. Replace if it becomes too worn.

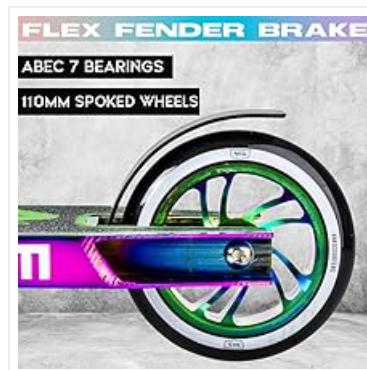


Image: Close-up of the scooter's rear wheel and flex fender brake, highlighting the ABEC 7 bearings and 110mm spoked wheels.

TROUBLESHOOTING

Here are solutions to common issues you might encounter with your stunt scooter.

Problem	Possible Cause	Solution
Handlebars are loose or wobbly.	Clamp bolts are not tight enough.	Tighten the clamp bolts evenly and securely.
Wheels are not spinning freely or are noisy.	Dirty or worn bearings, overtightened axle bolts.	Clean or replace bearings. Loosen axle bolts slightly if too tight.
Brake is not effective.	Worn brake, debris under brake, or misaligned.	Clean the brake area. Check for wear and replace if necessary. Ensure proper alignment.
Rattling noise from the headset.	Loose compression system or headset components.	Re-tighten the compression bolt and ensure all headset components are correctly seated.

SPECIFICATIONS

Key technical specifications for the NKD Team Stunt Scooter:

- **Brand:** NKD
- **Model:** Team Stunt Scooter
- **Color:** Gold/Black (other colors may vary by model variant)
- **Age Range (Description):** Kid (suitable for unisex-teen)
- **Special Feature:** Lightweight design
- **Weight Limit:** 220 Pounds (approximately 100 kg)
- **Number of Wheels:** 2
- **Wheel Material:** Aluminum core with durable urethane
- **Frame Material:** Aluminum
- **Item Weight:** 3700 Grams (3.7 kg)
- **Handlebar Type:** Fixed T-bar
- **Handle Height:** 22.83 Inches (approximately 58 cm)
- **Wheel Size:** 110 Millimeters
- **Bearings:** ABEC 7 (as indicated in product images)

Image: Detail of the scooter's front section, highlighting weight-saving cutouts and suitability for ages 5-14.



Image: Close-up of the scooter's reinforced handlebars, showing dimensions of 580mm height and 570mm width.

WARRANTY AND SUPPORT

NKD Scooters provides a manufacturer's warranty for defects in materials and workmanship. For specific warranty terms, duration, and to register your product, please refer to the official NKD website or contact their customer support.

For further assistance, technical support, or to purchase replacement parts, please visit the [NKD Store on Amazon](#) or the official NKD Scooters website.

© 2024 NKD Scooters. All rights reserved.