

# 1000FT Wireless Watch Calling System

## SW11 Series Instruction Manual



Receiver Model: SW11  
Buttons Model: Q-01A/Q-01AB

## Safety Precautions —

The instruction manual contains important information to prevent harm to the user and other people and damage to property, and to ensure safe and correct use of the product. Please thoroughly understand the following contents (displays and graphic symbols)



### Caution



Do not place the product in or near an inflammable, explosive, or hazardous object.



Do not disassemble the product. Disassembly may result in a risk of safety hazards.



Do not drop or subject it to strong impact. It will be the cause of the failure.



Do not use chlorine-based or acidic detergents for cleaning. The main body may become discolored or deformed, or toxic gases may be generated, which may harm your health.



Do not be mixed with other commercial wastes for disposal.



If you feel any abnormality such as getting hot or smelling strange, please stop using it immediately. It may cause fire or electric shock.



Children should be supervised to ensure that they do not play with the appliance.

## How does the system work with caregiver ? —

Designed for elderly care, it sends a signal to caregivers.



Bed Alarms and Fall Prevention




Hospice Care, Home Nursing

<b>01</b>	<b>What is in the Box</b>	<b>04</b>
<b>02</b>	<b>Features</b>	<b>05</b>
<b>03</b>	<b>Learn about Products</b>	<b>06</b>
<b>04</b>	<b>Operational Guidance</b>	<b>08</b>
	Add Call Buttons/Transmitters .....	08
	Keyvalue Define .....	09
	Del All Buttons .....	10
	Prompt Mode & Prompt Times .....	11
	Video operation QR code .....	12
<b>05</b>	<b>Installation Guide</b>	<b>13</b>
<b>06</b>	<b>Charge the Provided Battery</b>	<b>14</b>
<b>07</b>	<b>Question &amp; Answer</b>	<b>15</b>

## What is in the Box —



Call Button



Double Sided  
Adhesive Tape



Auxiliary  
Tool




Manual



AC Plug



Screwdriver



Charging Cable



Lanyard



Smart Call Watch

## Features —

### Watch Receiver-SW11



384  
Add Button



55 Keyvalue  
Define



1000ft/300m  
Wireless Range



IP67  
Waterproof



4 Ringtone  
Prompt Modes



Adjustable Prompt  
Times(02-99 times)



Time & Date/  
Touch Key

### Call Button-Q-01AB



IP55  
Waterproof




Easy to Carry




-22°F to 158°F  
Working Temperature

## Learn About Products —

### SW11-Watch Receiver

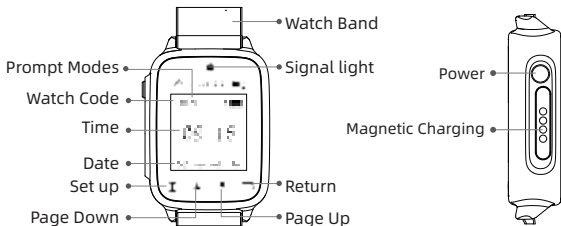

### Q-01AB/Q-01A-Call Button

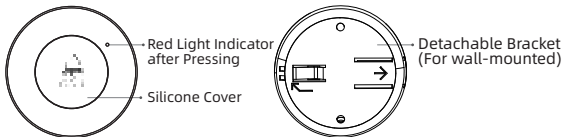


# Operator Interfaces

## A Calling Interface

Watch pager number

Prompt mode




Transmitter number


Keyvalue define

Number of reminders


## B Add Buttons



## C Keyvalue Define



## D Del All Buttons






# Operational Guidance —


## ① Add Call Buttons/Transmitters

01




1. Press and hold the Setup key ⚙️

02




2. Go to (Administrator) ⚙️

03




3. Go to (Add Buttons) ⚙️

04




4. Edit the transmitter number ▲▼

05



5. Short press the Setup key to edit the tens and hundreds digits ⚙️


06



6. Press the transmitter button


## ② Keyvalue Define

01



1. Press and hold the Setup key ⚙️

02




2. Go to (Administrator) ⚙️

03




3. Go to (Keyvalue Define) ⚙️

04



4. Select "Fun" ▲▼


05



5. Press the transmitter button


### ③ Del All Buttons

01




1. Press and hold the Setup key ⚙️

02



2. Go to (Administrator) ⚙️

03



3. Go to (Del All Buttons) ⚙️

04



4. Select "Yes" ▲▼


05



5. Press and hold the Setup key ⚙️


## ④ Changing the Prompt Mode (Ringtone)/Prompt Times

01




1. Press and hold the Setup key ⚙️


02



2. Go to (Prompt Mode / Prompt Times) ▲▼




04



4. select "Mode" / "Times" ▲▼

05



5. Go to (Prompt Mode / Prompt Times) ▲▼

## ⑤ Data Sync

This function only applies if you have purchased more than one watch receiver, you can contact us to send you a data cable (customized cable is required), if you have purchased few watch receivers, just do it manually.

## ⑥ Timeout Prompt

Press and hold the Setup key  - Go to (Timeout Prompt) 

## ⑥ For more features, please check the video QR code

How to set alarm, change background and font color, alert language, rest time and screen brightness

### Video Guide

Model: Q-01A/Q-01AB

FCC ID: 2AWYQ-Q-01A

Power: AAA Battery



Made in China



SW11 Receiver and Transmitter  
Operation Video  
Please scan the code to view


[www.calltou.com](http://www.calltou.com)




[Service01@calltou.com](mailto:Service01@calltou.com)

## Installation Guide —

### ① The transmitter button can be used in two ways

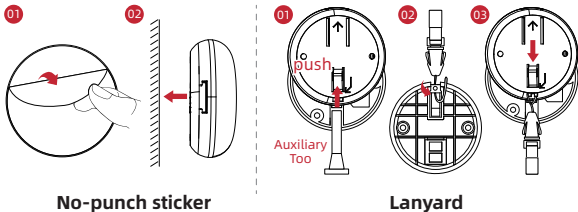


### ② Call Button-Replacing Battery

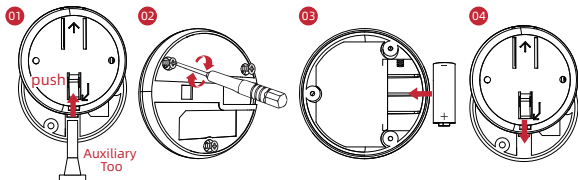

**Note:** For more detailed instructions, please scan the QR code on page 12 to watch.

## Charge the Provided Battery —

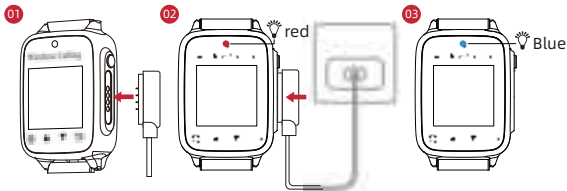

**Red** = Charging      **Blue** = Charged

- 01** First, fully charge the battery by plugging
- 02** it into a power source using the provided cable.
- 03** The small light on top will glow blue once fully charged.

## Technical Parameters —

Battery capacity	3.7V 450mAh
Standby current	<12mA
Receiving frequency	433.92MHZ
Receiving sensitivity	-113dbm
Power supply	5V 1A
Ambient temperature	-20°C to 55°C

## Question & Answer —

**Q: Do I need to pair the receiver and transmitter myself?**

**A:** The receiver and transmitter are factory-paired and do not need to be paired yourself.

**Q: Vibration and sound is too light/quiet.**

**A:** The volume is fixed, you can adjust the alert mode to vibration + ringing and increase the number of ringing times by adjusting the alert mode to vibration + ringing. For more details, please refer to "Prompt Mode & Prompt Times".

**Q: What factors affect the use distance of the pager?**

**A:** Obstacles near the transmitter and receiver can interfere with the signal. Avoid placing them near items like power supplies, TVs, microwaves, or iron doors.

**Q: The pager cannot select the menu.**

**A:** Long press the setup button for 5s, enter the menu page, short press the setup button to select next menu,

**Q: Unable to pair call buttons.**

**A:** Please refer to "Add Call Buttons" for pairing operation instructions.

**Q: Why doesn't the pager system work?**

**A1:** Does the receiver make a sound when pressing the volume button? If not, troubleshoot the receiver.

**A2:** Does the transmitter light up? If not, replace the battery.

**A3:** If both are fine, re-do the pairing (see "How to Pair?").

**A4:** Test the system at its maximum range; out of range, it won't work.