

Ultra-low Power Sub-1GHz RF Transceiver

Features

- Frequency range: 127 ~1020 MHz
- Modem: OOK, (G)FSK and (G)MSK
- Data rate: 0.5 ~ 300 kbps
- Sensitivity: -121 dBm 2.0 kbps, FRF = 433.92 MHz
-111 dBm 50 kbps, FRF = 433.92 MHz
- Voltage range: 1.8 ~3.6 V
- Transmit current: 23 mA @ 13 dBm, 433.92 MHz, FSK
72 mA @ 20 dBm, 433.92 MHz, FSK
- Rx current: 8.5 mA @ 433.92 MHz, FSK (High power mode)
7.2 mA @ 433.92 MHz, FSK (Low power mode)
- Super-low Power receive mode
- Sleep current: 300 nA, Duty Cycle = OFF
800 nA, Duty Cycle = ON
- Receiver features:
 - ◆ Fast and stable automatic frequency control (AFC)
 - ◆ 3 types of clock data recovery system (CDR)
 - ◆ Fast and accurate signal detection (PJD)
- 4-wire SPI interface
- Direct and packet mode supported
- Configurable packet handler and 64-Byte FIFO.
- NRZ, Manchester codec, Whitening codec, Forward Error Correction (FEC)

Description

CMT2300A is an ultra-low power, high performance, OOK (G) FSK RF transceiver suitable for a variety of 140 to 1020 MHz wireless applications. It is part of the CMOSTEK NextGenRF™ RF product line. The product line contains the complete transmitters, receivers and transceivers. The high integration of CMT2300A simplifies the peripheral materials required in the system design. Up to +20 dBmTx Power and -121 dBm sensitivity optimize the performance of the application. It supports a variety of packet formats and codec methods to meet the needs of various different applications. In addition, CMT2300A also supports 64-byte Tx/Rx FIFO, GPIO and interrupt configuration, Duty-Cycle operation mode, channel sensing, high-precision RSSI, low-voltage detection, power-on reset, low frequency clock output, manual fast frequency hopping, squelch and etc. The features make the application design more flexible and differentiated. CMT2300A operates from 1.8 V to 3.6 V. Only 8.5 mA current is consumed when the sensitivity is -121 dBm, SuperLow Power mode can further reduce the chip power consumption. Only 23mA Tx current is consumed when the output power is 13 dBm.

Application


- Automatic meter reading
- Home security and building automation
- ISM band data communication
- Industrial monitoring and control
- Remote control and security system
- Remote key entry
- Wireless sensor node
- Tag reader

Ordering Information

Model	Frequency	Package	MOQ
CMT2300A-EQR	433.92 MHz	QFN16	3,000 pcs
Please see Table 23 for more ordering details.			



QFN16 (3x3) Packaging

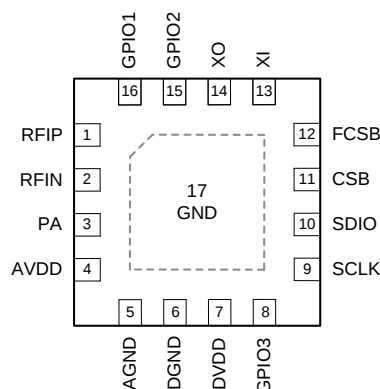

CMT2300 Top View

Table of Contents

1. Electrical Characteristics	4
1.1 Recommended Operation Condition	4
1.2 Absolute Maximum Rating	4
1.3 Power Consumption	5
1.4 Receiver	6
1.5 Transmitter	9
1.6 Settling Time	9
1.7 Frequency Synthesizer	10
1.8 Crystal Oscillator	11
1.9 Low Frequency Oscillator	11
1.10 Low Battery Detection	12
1.11 Digital Interface	12
1.12 Figures of Critical Parameters	12
1.12.1 Rx Current VS. Supply Voltage	12
1.12.2 Rx Current VS. Voltage Temperature	13
1.12.3 Sensitivity VS. Voltage	14
1.12.4 Sensitivity VS. Temperature	14
1.12.5 Tx Power VS. Supply Voltage	15
1.12.6 Tx Phase Noise	16
2. Pin Descriptions	17
3. Typical Application Schematic	20
3.1 Direct Tie Schematic Diagram	20
3.2 RF Switch Type Schematic	22
4. Function Descriptions	24
4.1 Transmitter	25
4.2 Receiver	25
4.3 Additional Functions	25
4.3.1 Power-On Reset (POR)	25
4.3.2 Crystal Oscillator	26
4.3.3 Sleep Timer	27
4.3.4 Low Battery Detection	27
4.3.5 Received Signal Strength Indicator(RSSI)	27
4.3.6 Phase Jump Detector (PJD)	29
4.3.7 Automatic Frequency Control (AFC)	29
4.3.8 Clock Data Recovery (CDR)	30
4.3.9 Fast Frequency Hopping	30
5. Chip Operation	31
5.1 SPI Interface	31
5.2 FIFO	32
5.2.1 FIFO Read Operation	33
5.2.2 FIFO Associated Interrupt	34

5.3	Operation State, Timing and Power Consumption	35
5.3.1	Startup Timing.....	35
5.3.2	Operation State.....	36
5.4	GPIO and Interrupt.....	38
6.	Packet Handler.....	42
6.1	Direct Mode.....	42
6.2	Packet Mode	43
7.	Low Power Operation	45
7.1	Duty Cycle Operation Mode	45
7.2	Super-low Power Rx Mode.....	45
7.3	Receiver “Power VS Performance” Configuration	46
8.	User Register	47
9.	Ordering Information	50
10.	Packaging Information	51
11.	Top Marking.....	52
12.	Revise History	53
13.	Contacts	54

1. Electrical Characteristics

$V_{DD} = 3.3\text{ V}$, $T_{OP} = 25\text{ }^{\circ}\text{C}$, $F_{RF} = 433.92\text{ MHz}$, the sensitivity is measured by receiving a PN9 coded data and matching the impedance to 50Ω under the 0.1%BER standard. Unless otherwise stated, all results are tested on the CMT2300A-EM evaluation board.

1.1 Recommended Operation Condition

Table 1. Recommended Operation Conditions

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Power voltage	V_{DD}		1.8		3.6	V
Operating temperature	T_{OP}		-40		85	$^{\circ}\text{C}$
Power voltage slope			1			mV/us

1.2 Absolute Maximum Rating


Table 2. Absolute Maximum Ratings^[1]

Parameter	Symbol	Conditions	Min	Max	Unit
Supply Voltage	V_{DD}		-0.3	3.6	V
Interface Voltage	V_{IN}		-0.3	$V_{DD} + 0.3$	V
Junction Temperature	T_J		-40	125	$^{\circ}\text{C}$
Storage Temperature	T_{STG}		-50	150	$^{\circ}\text{C}$
Soldering Temperature	T_{SDR}	Lasts at least 30 seconds		255	$^{\circ}\text{C}$
ESD Rating ^[2]		Human Body Model (HBM)	-2	2	kV
Latch-up Current		@ $85\text{ }^{\circ}\text{C}$	-100	100	mA

Notes:

[1]. Exceeding the Absolute Maximum Ratings may cause permanent damage to the equipment. This value is a pressure rating and does not imply that the function of the equipment is affected under this pressure condition, but if it is exposed to absolute maximum ratings for extended periods of time, it may affect equipment reliability.

[2]. The CMT2300A is a high performance RF integrated circuit. The operation and assembly of this chip should only be performed on a workbench with good ESD protection.



Caution! ESD sensitive device. Precaution should be used when handling the device in order to prevent permanent damage.

1.3 Power Consumption

Table 3. Power Consumption Specification

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Sleep current	I_{SLEEP}	Sleep mode, sleep timer is off		300		nA
		Sleep mode, sleep timer is on		800		nA
Standby current	I_{Standby}	Crystal oscillator is on		1.45		mA
RFS current	I_{RFS}	433 MHz		5.7		mA
		868 MHz		5.8		mA
		915 MHz		5.8		mA
TFS current	I_{TFS}	433 MHz		5.6		mA
		868 MHz		5.9		mA
		915 MHz		5.9		mA
RXcurrent (high power mode)	$I_{\text{RX-HP}}$	FSK, 433 MHz, 10 kbps, 10 kHz F_{DEV}		8.5		mA
		FSK, 868 MHz, 10 kbps, 10 kHz F_{DEV}		8.6		mA
		FSK, 915 MHz, 10 kbps, 10 kHz F_{DEV}		8.9		mA
RX current (low power mode)	$I_{\text{RX-LP}}$	FSK, 433 MHz, 10 kbps, 10 kHz F_{DEV}		7.2		mA
		FSK, 868 MHz, 10 kbps, 10 kHz F_{DEV}		7.3		mA
		FSK, 915 MHz, 10 kbps, 10 kHz F_{DEV}		7.6		mA
TX current	I_{Tx}	FSK, 433 MHz, +20 dBm (Direct Tie)		72		mA
		FSK, 433 MHz, +20 dBm (RF switch)		77		mA
		FSK, 433 MHz, +13 dBm (Direct Tie)		23		mA
		FSK, 433 MHz, +10 dBm (Direct Tie)		18		mA
		FSK, 433 MHz, -10 dBm (Direct Tie)		8		mA
		FSK, 868 MHz, +20 dBm (Direct Tie)		87		mA
		FSK, 868 MHz, +20 dBm (RF switch)		80		mA
		FSK, 868 MHz, +13 dBm (Direct Tie)		27		mA
		FSK, 868 MHz, +10 dBm (Direct Tie)		19		mA
		FSK, 868 MHz, -10 dBm (Direct Tie)		8		mA
		FSK, 915 MHz, +20 dBm (Direct Tie)		70		mA
		FSK, 915 MHz, +20 dBm (RF switch)		75		mA
		FSK, 915 MHz, +13 dBm (Direct Tie)		28		mA
		FSK, 915 MHz, +10 dBm (Direct Tie)		19		mA
		FSK, 915 MHz, -10 dBm (Direct Tie)		8		mA

1.4 Receiver

Table 4. Receiver specification

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Data rate	DR	OOK	0.5		40	kbps
		FSK and GFSK	0.5		300	kbps
Deviation	F _{DEV}	FSK and GFSK	2		200	kHz
Sensitivity @ 433 MHz	S _{433-HP}	DR = 2.0 kbps, F _{DEV} = 10 kHz		-121		dBm
		DR = 10 kbps, F _{DEV} = 10 kHz		-116		dBm
		DR = 10 kbps, F _{DEV} = 10 kHz (Low power setting)		-115		dBm
		DR = 20 kbps, F _{DEV} = 20 kHz		-113		dBm
		DR = 20 kbps, F _{DEV} = 20 kHz (Low power setting)		-112		dBm
		DR = 50 kbps, F _{DEV} = 25 kHz		-111		dBm
		DR = 100 kbps, F _{DEV} = 50 kHz		-108		dBm
		DR = 200 kbps, F _{DEV} = 100 kHz		-105		dBm
		DR = 300 kbps, F _{DEV} = 100 kHz		-103		dBm
Sensitivity @ 868 MHz	S _{868-HP}	DR = 2.0 kbps, F _{DEV} = 10 kHz		-119		dBm
		DR = 10 kbps, F _{DEV} = 10 kHz		-113		dBm
		DR = 10 kbps, F _{DEV} = 10 kHz (Low power setting)		-111		dBm
		DR = 20 kbps, F _{DEV} = 20 kHz		-111		dBm
		DR = 20 kbps, F _{DEV} = 20 kHz (Low power setting)		-109		dBm
		DR = 50 kbps, F _{DEV} = 25 kHz		-108		dBm
		DR = 100 kbps, F _{DEV} = 50 kHz		-105		dBm
		DR = 200 kbps, F _{DEV} = 100 kHz		-102		dBm
		DR = 300 kbps, F _{DEV} = 100 kHz		-99		dBm
Sensitivity @ 915 MHz	S _{915-HP}	DR = 2.0 kbps, F _{DEV} = 10 kHz		-117		dBm
		DR = 10 kbps, F _{DEV} = 10 kHz		-113		dBm
		DR = 10 kbps, F _{DEV} = 10 kHz (Low power mode)		-111		dBm
		DR = 20 kbps, F _{DEV} = 20 kHz		-111		dBm
		DR = 20 kbps, F _{DEV} = 20 kHz (Low power mode)		-109		dBm
		DR = 50 kbps, F _{DEV} = 25 kHz		-109		dBm
		DR = 100 kbps, F _{DEV} = 50 kHz		-105		dBm
		DR = 200 kbps, F _{DEV} = 100 kHz		-102		dBm
		DR = 300 kbps, F _{DEV} = 100 kHz		-99		dBm
Saturation Input Signal Level	P _{LVL}				20	dBm
Input Impedance	HF (High frequency band)	180R // 2.8pF				
	LF (Low frequency band)	135R // 1.9pF				
Image Rejection Ratio	IMR	F _{RF} =433 MHz		35		dB
		F _{RF} =868 MHz		33		dB
		F _{RF} =915 MHz		33		dB

CMT2300A

RX Channel Bandwidth	BW	RX channel bandwidth	50		500	kHz
Co-channel Rejection Ratio	CCR	DR = 10 kbps, $F_{DEV} = 10$ kHz; Interference with the same modulation		-7		dB
Adjacent Channel Rejection Ratio	ACR-I	DR = 10 kbps, $F_{DEV} = 10$ kHz; BW=100kHz, 200 kHzChannel spacing, interference with the same modulation		30		dB

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
AlternateChannel Rejection Ratio	ACR-II	DR = 10 kbps, $F_{DEV} = 10$ kHz; BW=100kHz, 400 kHz Channel spacing, interference with the same modulation		45		dB
Blocking Rejection Ratio	BI	DR = 10 kbps, $F_{DEV} = 10$ kHz; ± 1 MHz Deviation, continuous wave interference		70		dB
		DR = 10 kbps, $F_{DEV} = 10$ kHz; ± 2 MHz Deviation, continuous wave interference		72		dB
		DR = 10 kbps, $F_{DEV} = 10$ kHz; ± 10 MHz Deviation, continuous wave interference		75		Db
Input 3 rd Order Intercept Point	IIP3	DR = 10 kbps, $F_{DEV} = 10$ kHz; 1 MHz and 2 MHz Deviation dual tone test, maximum system gain setting.		-25		dBm
RSSI Range	RSSI		-120		20	dBm
More Sensitivity (Typical Configuration)		433.92 MHz, DR = 1.2kbps, $F_{DEV} = 5$ kHz		-122.9		dBm
		433.92 MHz, DR = 1.2kbps, $F_{DEV} = 10$ kHz		-121.8		dBm
		433.92 MHz, DR = 1.2kbps, $F_{DEV} = 20$ kHz		-119.5		dBm
		433.92 MHz, DR = 2.4kbps, $F_{DEV} = 5$ kHz		-120.6		dBm
		433.92 MHz, DR = 2.4kbps, $F_{DEV} = 10$ kHz		-120.3		dBm
		433.92 MHz, DR = 2.4kbps, $F_{DEV} = 20$ kHz		-119.7		dBm
		433.92 MHz, DR = 9.6 kbps, $F_{DEV} = 9.6$ kHz		-116.0		dBm
		433.92 MHz, DR = 9.6 kbps, $F_{DEV} = 19.2$ kHz		-116.1		dBm
		433.92 MHz, DR = 20 kbps, $F_{DEV} = 10$ kHz		-114.2		dBm
		433.92 MHz, DR = 20 kbps, $F_{DEV} = 20$ kHz		-113.0		dBm
		433.92 MHz, DR = 50 kbps, $F_{DEV} = 25$ kHz		-110.6		dBm
		433.92 MHz, DR = 50 kbps, $F_{DEV} = 50$ kHz		-109.0		dBm
		433.92 MHz, DR = 100 kbps, $F_{DEV} = 50$ kHz		-107.8		dBm
		433.92 MHz, DR = 200 kbps, $F_{DEV} = 50$ kHz		-103.5		dBm
		433.92 MHz, DR = 200 kbps, $F_{DEV} = 100$ kHz		-104.3		dBm
		433.92 MHz, DR = 300 kbps, $F_{DEV} = 50$ kHz		-98.0		dBm
		433.92 MHz, DR = 300 kbps, $F_{DEV} = 150$ kHz		-101.6		dBm

1.5 Transmitter

Table 5. Transmitter Specifications

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Output power	P _{OUT}	Need specific peripheral materials for different frequency bands	-20		+20	dBm
Output power step	P _{STEP}			1		dB
GFSK Gaussian filter coefficient	BT		0.3	0.5	1.0	-
Output power variation	P _{OUT-TOP}	Temperature from -40 to +85 °C		1		dB
Stray radiation		P _{OUT} = +13 dBm, 433MHz, F _{RF} <1 GHz			-42	dBm
		1 GHz to 12.75 GHz, with harmonic			-36	dBm
Harmonic output for F _{RF} = 433 MHz ^[1]	H2 ₄₃₃	2 nd harmonic +20 dBm P _{OUT}		-46		dBm
	H3 ₄₃₃	3 rd harmonic +20 dBm P _{OUT}		-50		dBm
Harmonic output for F _{RF} = 868 MHz ^[1]	H2 ₈₆₈	2 nd harmonic +20 dBm P _{OUT}		-43		dBm
	H3 ₈₆₈	3 rd harmonic +20 dBm P _{OUT}		-52		dBm
Harmonic output for F _{RF} = 915 MHz ^[1]	H2 ₈₆₈	2 nd harmonic +20 dBm P _{OUT}		-48		dBm
	H3 ₈₆₈	3 rd harmonic +20 dBm P _{OUT}		-53		dBm
Harmonic output for F _{RF} = 433 MHz ^[1]	H2 ₄₃₃	2 nd harmonic +13 dBm P _{OUT}		-52		dBm
	H3 ₄₃₃	3 rd harmonic +13 dBm P _{OUT}		-52		dBm
Harmonic output for F _{RF} = 868 MHz ^[1]	H2 ₈₆₈	2 nd harmonic +13 dBm P _{OUT}		-52		dBm
	H3 ₈₆₈	3 rd harmonic +13 dBm P _{OUT}		-52		dBm
Harmonic output for F _{RF} = 915 MHz ^[1]	H2 ₈₆₈	2 nd harmonic +13 dBm P _{OUT}		-52		dBm
	H3 ₈₆₈	3 rd harmonic +13 dBm P _{OUT}		-52		dBm

Notes:

[1]. The harmonic parameter values mainly depend on the quality of the hardware matching network. The above data is measured based on the CMT2300A-EM module.

1.6 Settling Time

Table 6. Settling Time

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Settle time	T _{SLP-RX}	From Sleep to RX		1000		us
	T _{SLP-TX}	From Sleep to TX		1000		us
	T _{STB-RX}	From Standby to RX		350		us
	T _{STB-TX}	From Standby to TX		350		us
	T _{RFS-RX}	From RFS to RX		20		us
	T _{TFS-RX}	From TFS to TX		20		us
	T _{TX-RX}	From TX to RX (Ramp Down time needs 2T _{symbol})		2T _{symbol} +350		us
	T _{RX-TX}	From RX to TX		350		us

Notes:

[1]. T_{SLP-RX} and T_{SLP-TX} depend on the crystal oscillator startup time, which is related to crystal characteristics.

1.7 Frequency Synthesizer

Table 7. Frequency Synthesizer Specifications

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Frequency range	F_{RF}	Need different matching networks	760		1020	MHz
			380		510	MHz
			190		340	MHz
			127		170	MHz
Frequency resolution	F_{RES}			25		Hz
Frequency tuning time	t_{TUNE}			150		us
Phase noise@ 433 MHz	PN_{433}	10 kHz frequency deviation		-94		dBc/Hz
		100 kHz frequency deviation		-99		dBc/Hz
		500 kHz frequency deviation		-118		dBc/Hz
		1MHz frequency deviation		-127		dBc/Hz
		10 MHz frequency deviation		-134		dBc/Hz
Phase noise@ 868 MHz	PN_{868}	10 kHz frequency deviation		-92		dBc/Hz
		100 kHz frequency deviation		95		dBc/Hz
		500 kHz frequency deviation		-114		dBc/Hz
		1MHz frequency deviation		-121		dBc/Hz
		10 MHz frequency deviation		-130		dBc/Hz
Phase noise@ 915 MHz	PN_{915}	10 kHz frequency deviation		-89		dBc/Hz
		100 kHz frequency deviation		-92		dBc/Hz
		500 kHz frequency deviation		-111		dBc/Hz
		1MHz frequency deviation		-121		dBc/Hz
		10 MHz frequency deviation		-130		dBc/Hz

1.8 Crystal Oscillator

Table 8. Crystal Oscillator Specifications

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Crystal frequency ^[1]	F _{XTAL}			26		MHz
Frequency tolerance ^[2]	ppm			20		ppm
Load capacitance	C _{LOAD}			15		pF
Equivalent resistance	R _m			60		Ω
Start-up time ^[3]	t _{XTAL}			400		us
Notes: [1]. CMT2300A can use the external reference clock to drive the XIN pin through the coupling capacitor. The peak value of the external clock signal is between 0.3V and 0.7V. [2]. The value includes (1) initial error; (2) crystal load; (3) aging; and (4) change with temperature. The acceptable crystal frequency tolerance is limited by the receiver bandwidth and the RF frequency offset between the transmitter and the receiver. [3]. The parameter is largely related to the crystal.						

1.9 Low Frequency Oscillator

Table 9. Low Frequency Oscillator Specifications

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Calibration frequency ^[1]	F _{LPOSC}			32		kHz
Frequency accuracy		After calibration		±1		%
Temperature coefficient ^[2]				-0.02		%/°C
Supply voltage coefficient ^[3]				+0.5		%/V
Initial calibration time	t _{LPOSC-CAL}			4		ms
Notes: [1]. The low frequency oscillator is automatically calibrated to the crystal oscillator frequency at the PUP stage and periodically calibrated at this stage. [2]. After calibration, the frequency changes with temperature. [3]. After calibration, the frequency changes with the change of the supply voltage.						

1.10 Low Battery Detection

Table 10. Low Battery Detection Specifications

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Detection accuracy	LBD _{RES}			50		mV


1.11 Digital Interface

Table 11. Digital interface specifications

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Digital input high level	V _{IH}		V _{DD} -0.4			V _{DD}
Digital input low level	V _{IL}				0.2	V _{DD}
Digital output high level	V _{OH}	@I _{OH} = -0.5mA	V _{DD} -0.4			V
Digital output low level	V _{OL}	@I _{OL} = 0.5mA			0.4	V
SCLK Frequency	F _{SCL}				5	MHz
SCLK high time	T _{CH}		80			ns
SCLK low time	T _{CL}		80			ns
SCLKrise time	T _{CR}				50	ns
SCLKfall time	T _{CF}				50	ns


1.12 Figures of Critical Parameters

1.12.1 Rx Current VS. Supply Voltage

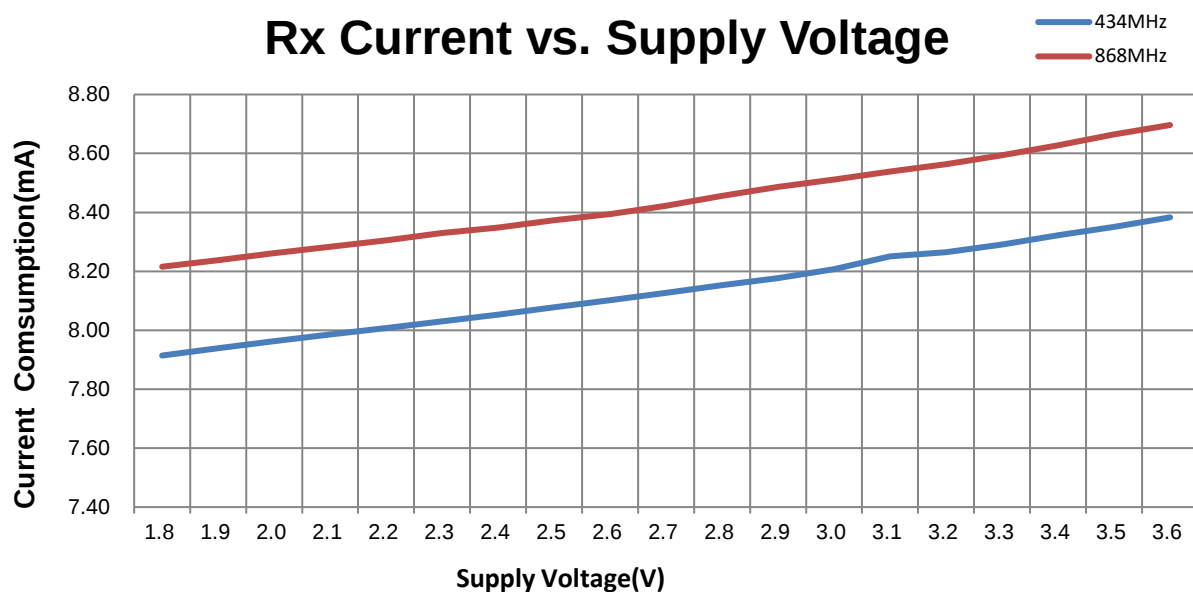


Testing Condition: Freq = 434MHz / 868MHz, Fdev = 10KHz, BR = 10Kbps

1.12.2 Rx Current VS. Voltage Temperature

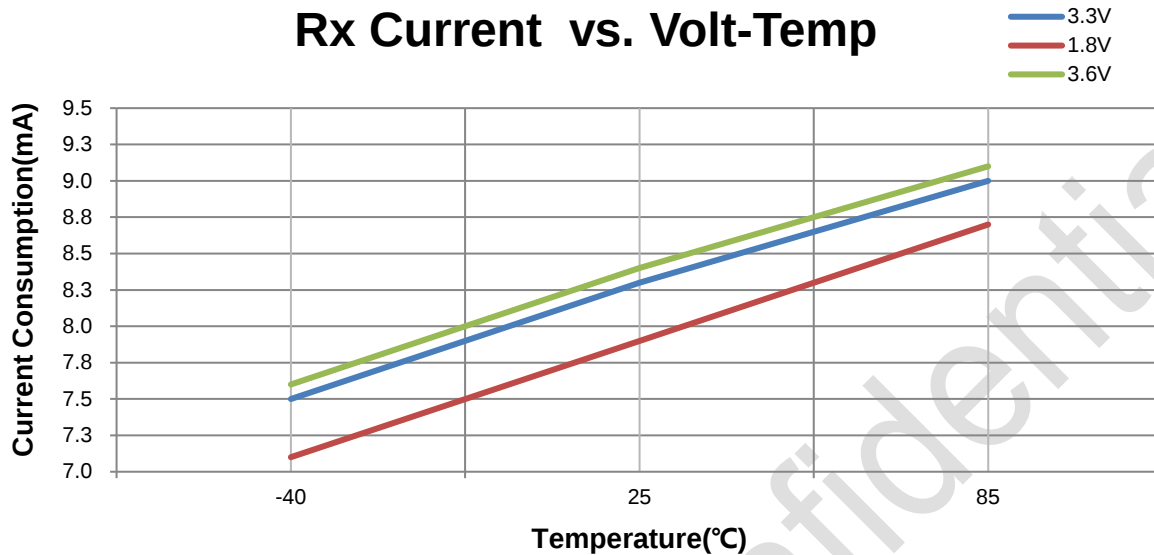


Test Condition: Freq = 434MHz, Fdev = 10KHz, BR = 10Kbps

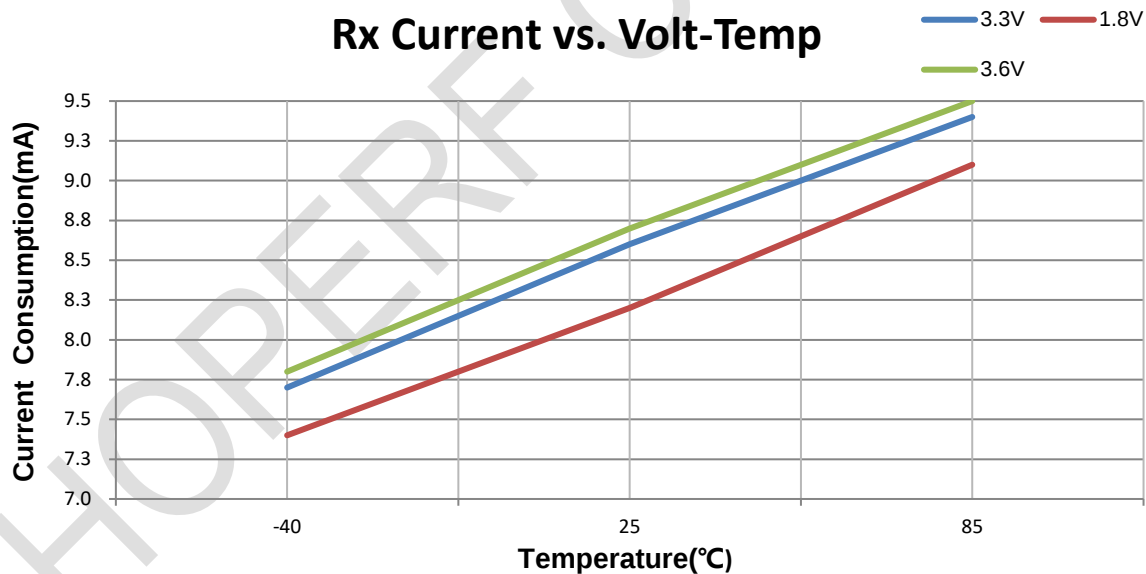


Test Condition: Freq = 868MHz, Fdev = 10KHz, BR = 10Kbps

1.12.3 Sensitivity VS. Voltage

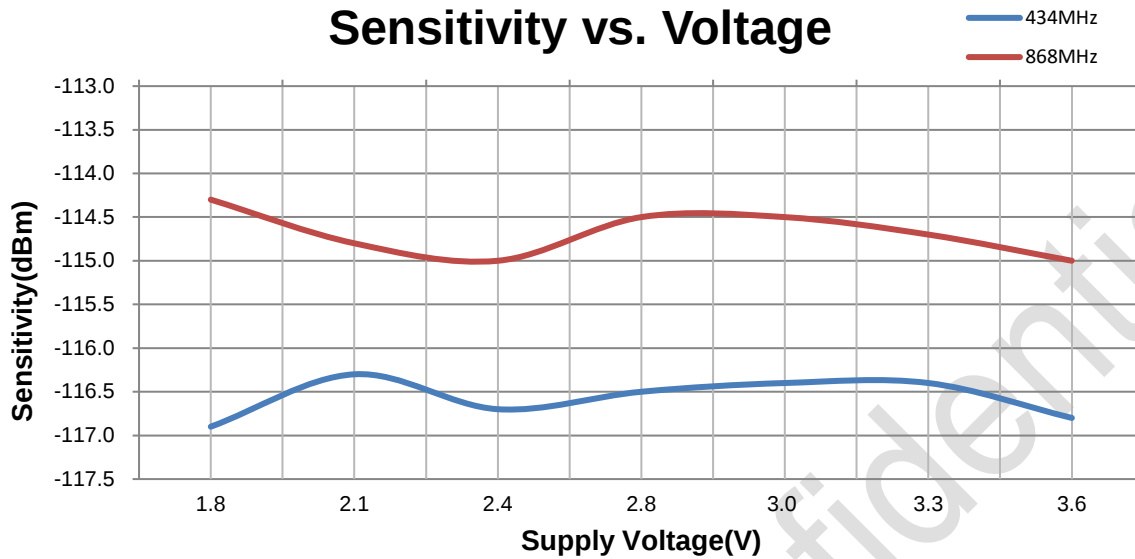


Test Condition: FSK modulation, DEV = 10KHz, BR = 10Kbps

1.12.4 Sensitivity VS. Temperature

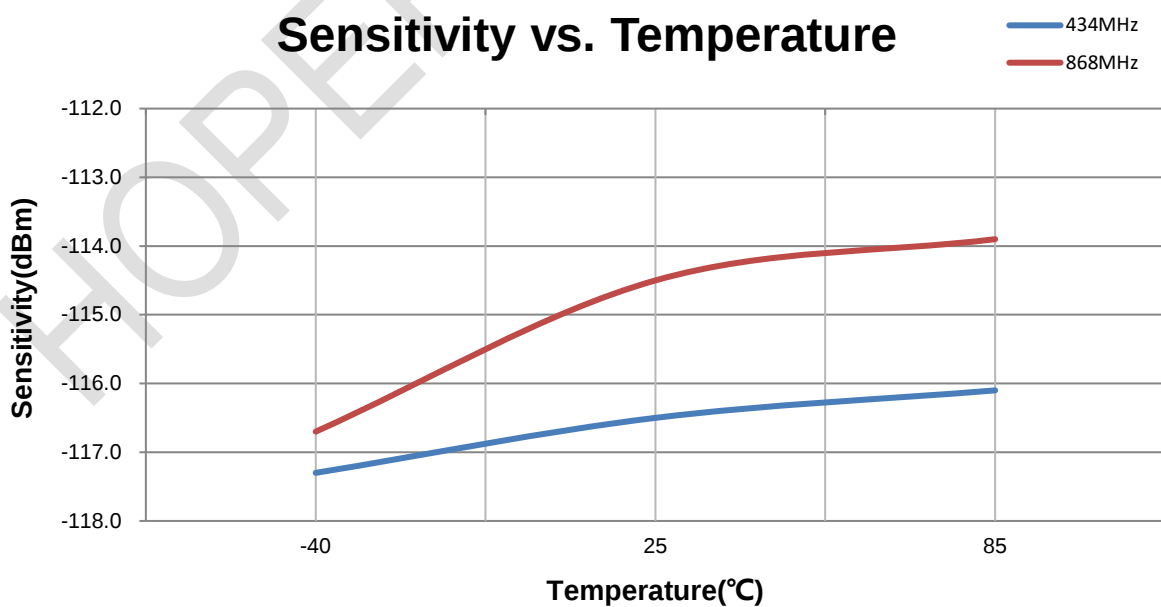


Test Condition: FSK, DEV = 10KHz, BR = 10Kbps

1.12.5 Tx Power VS. Supply Voltage

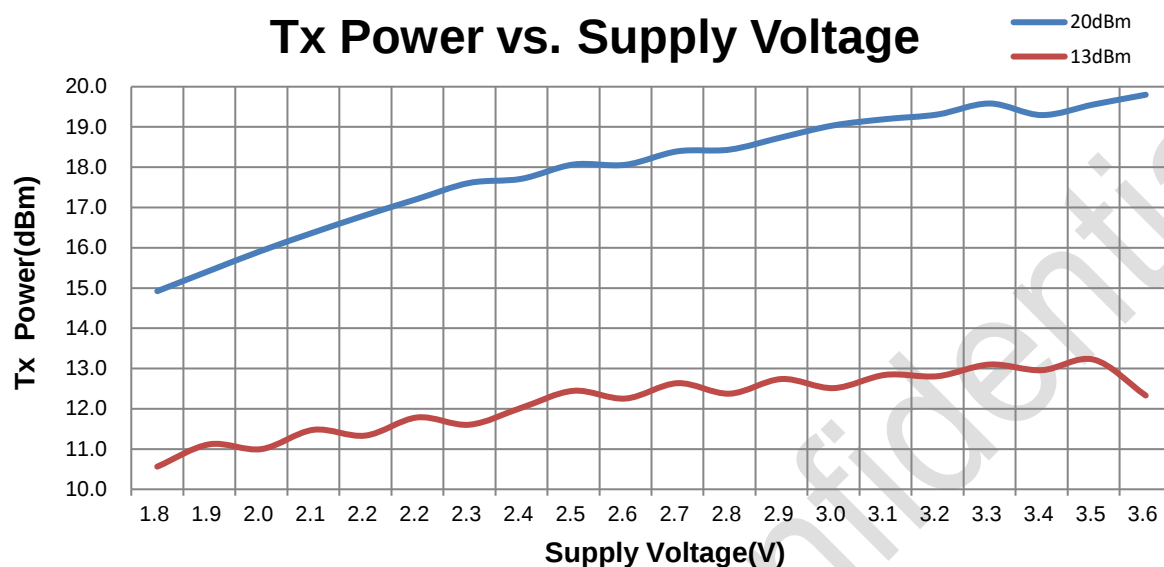


Test Condition: Freq = 434 MHz, 20 dBm / 13dBm matching network

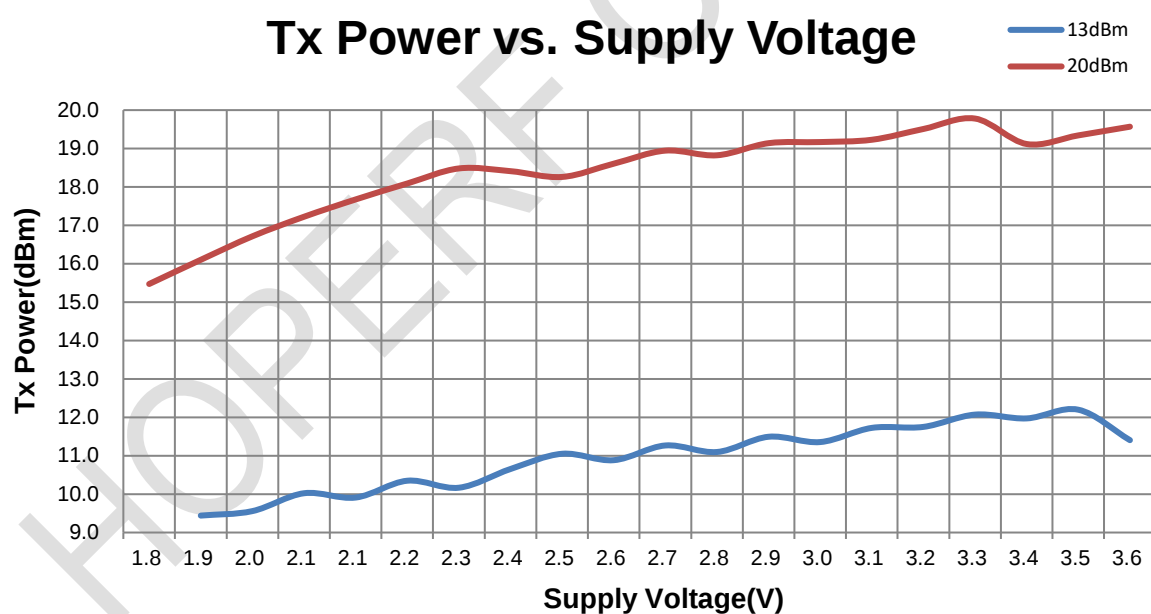


Test Condition: Freq = 868 MHz, 20 dBm / 13dBm matching network

1.12.6 Tx Phase Noise

433.92MHz Phase Noise

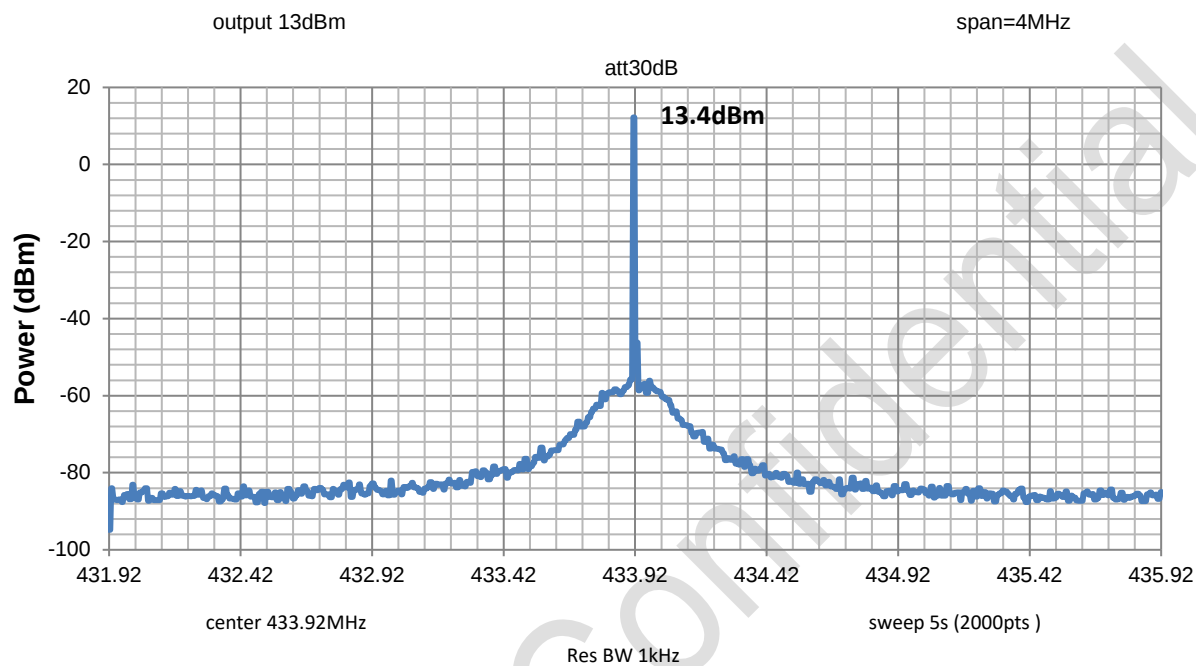

868MHz Phase Noise

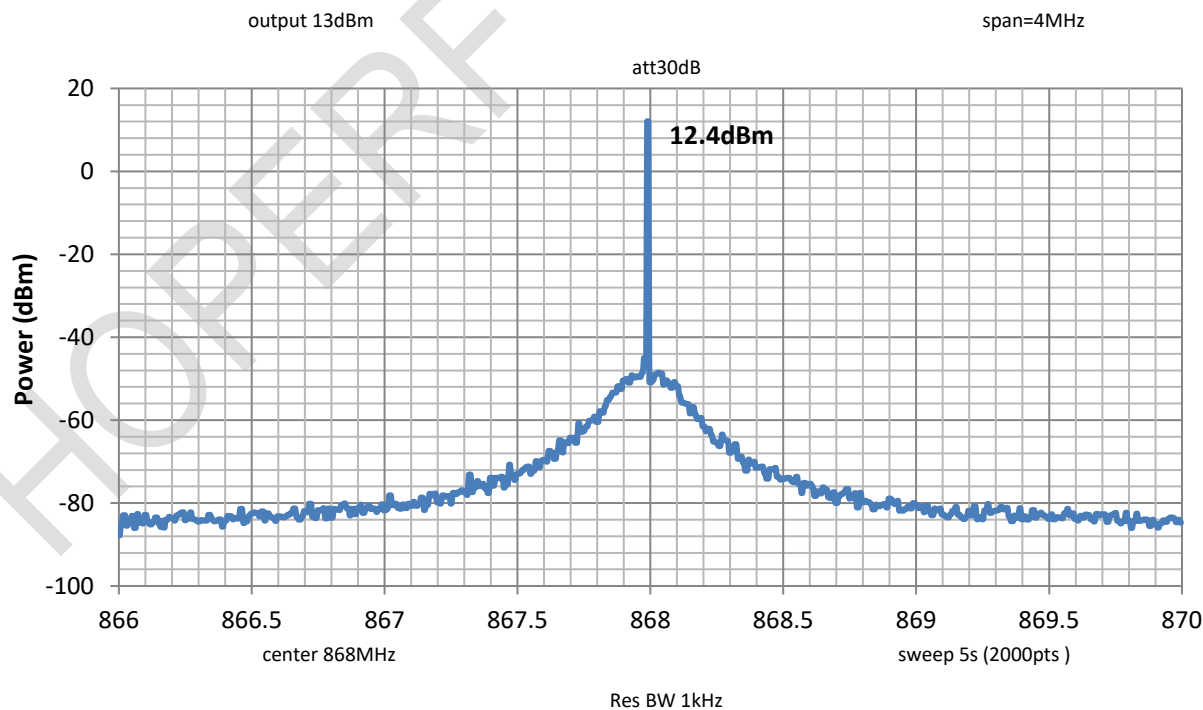

2. Pin Descriptions

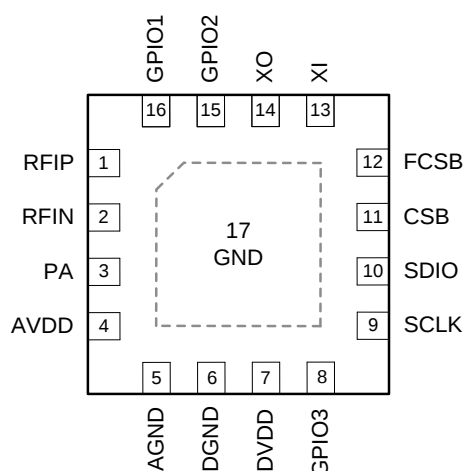


Figure 1. CMT2300A pin descriptions

Table 12. CMT2300A Pin Descriptions

Pin #	Name	I/O	Internal IO Schematic	Descriptions
1	RFIP	I		RF signal input P
2	RFIN	I		RF signal input N
3	PA	O		PA output
4	AVDD	IO		Analog VDD
5	AGND	IO		Analog GND
6	DGND	IO		Digital GND
7	DVDD	IO		Digital VDD
8 ^[1]	GPIO3	IO		Configured as CLKO, DOUT/DIN, INT2 and DCLK (TX/RX)
9	SCLK	I		SPI clock

Pin #	Name	I/O	Internal IO Schematic	Descriptions
10	SDIO	IO		SPI data input and output
11	CSB	I		SPI chip selection bar for register access, active low
12	FCSB	I		SPI chip selection bar for FIFO access, active low
13	XI	I		Crystal circuit input
14	XO	O		Crystal circuit output
15 ^[1]	GPIO2	IO		Configured as INT1, INT2, DOUT/DIN, DCLK (TX/RX) and RF_SWT
16 ^[1]	GPIO1	IO		Configured as DOUT/DIN, INT1, INT2, DCLK (TX/RX) and RF_SWT
17	GND	I		Analog GND. It must be grounded.

Pin #	Name	I/O	Internal IO Schematic	Descriptions
Notes:				
[1]. INT1 and INT2 are interrupts. DOUT is demodulated output. DIN is a modulation input. DCLK is a modulation or demodulation data rate synchronization clock, automatic switching in TX/RX mode.				
[2]. The SCLK pin connects an internal pull-down resistor of 4.7 k Ω inside the chip. Thus in low-power applications, the MCU cannot output high level (pull up), otherwise it will generate leakage current and will cause low-power implementation failure.				
[3]. The SDIO pin connects an internal pull-up resistor of 15 k Ω inside the chip. Thus in low-power applications, the MCU cannot output low level (pull down), otherwise it will generate leakage current and will cause low-power implementation failure.				
[4]. The GPIO pins connect an internal pull-up resistor of 15 k Ω inside the chip. Thus in low-power applications, the MCU cannot output low level (pull down), otherwise it will generate leakage current and will cause low-power implementation failure.				

3. Typical Application Schematic

3.1 Direct Tie Schematic Diagram

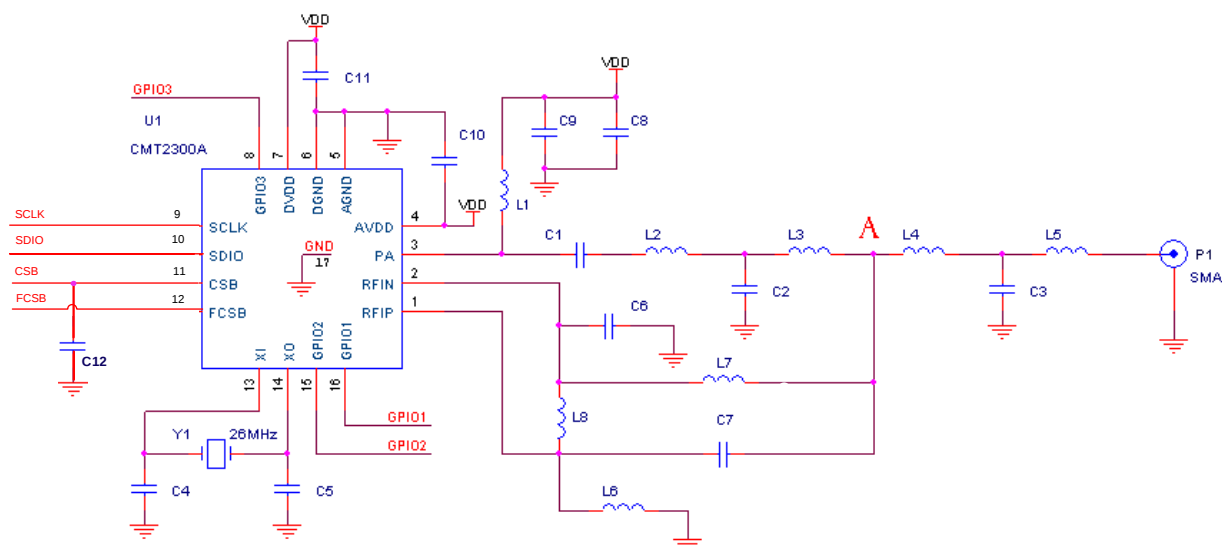


Figure 2. Direct Tie Application Schematic Diagram

Table 13. 13 dBm direct tie application BOM

No.	Descriptions	Values			Unit	Supplier
		433 MHz +13 dBm	868 MHz +13dBm	915 MHz +13dBm		
C1	±5%, 0603 NP0, 50 V	15	22	22	pF	
C2	±5%, 0603 NP0, 50 V	5.6	6.2	6.2	pF	
C3	±5%, 0603 NP0, 50 V	7.5	3.6	3.3	pF	
C4	±5%, 0603 NP0, 50 V	24	24	24	pF	
C5	±5%, 0603 NP0, 50 V	24	24	24	pF	
C6	±5%, 0603 NP0, 50 V	4.7	2.2	2.2	pF	
C7	±5%, 0603 NP0, 50 V	4.7	2.2	2.2	pF	
C8	±5%, 0603 NP0, 50 V	4.7			uF	
C9	±5%, 0603 NP0, 50 V	470			pF	
C10	±5%, 0603 NP0, 50 V	0.1			uF	
C11	±5%, 0603 NP0, 50 V	0.1			uF	
C12	±5%, 0603 NP0, 50 V	47			pF	
L1	±5%, 0603 Multilayer chip inductor	180	100	100	nH	Sunlord SDCL
L2	±5%, 0603 Multilayer chip inductor	56	10	8.2	nH	Sunlord SDCL
L3	±5%, 0603 Multilayer chip inductor	39	8.2	6.8	nH	Sunlord SDCL
L4	±5%, 0603 Multilayer chip inductor	18	10	8.2	nH	Sunlord SDCL
L5	±5%, 0603 Multilayer chip inductor	18	10	8.2	nH	Sunlord SDCL
L6	±5%, 0603 Multilayer chip inductor	27	15	12	nH	Sunlord SDCL
L7	±5%, 0603 Multilayer chip inductor	27	15	12	nH	Sunlord SDCL
L8	±5%, 0603 Multilayer chip inductor	68	12	12	nH	Sunlord SDCL

CMT2300A

Y1	±10 ppm, SMD32*25 mm		26		MHz	EPSON
U1	CMT2300A, Ultra Low Power Sub-1GHz RF Transceiver				-	CMOSTEK

Table 14. 20 dBm Direct Tie Application BOM

No.	Descriptions	Values			Unit	Supplier
		433 MHz +20 dBm	868 MHz +20 dBm	915 MHz +20 dBm		
C1	±5%, 0603 NP0, 50 V	15	18	18	pF	
C2	±5%, 0603 NP0, 50 V	3.0	3.6	3.6	pF	
C3	±5%, 0603 NP0, 50 V	6.2	3.3	3.3	pF	
C4	±5%, 0603 NP0, 50 V	24	24	24	pF	
C5	±5%, 0603 NP0, 50 V	24	24	24	pF	
C6	±5%, 0603 NP0, 50 V	4.7	2	1.8	pF	
C7	±5%, 0603 NP0, 50 V	4.7	2	1.8	pF	
C8	±5%, 0603 NP0, 50 V	4.7			uF	
C9	±5%, 0603 NP0, 50 V	470			pF	
C10	±5%, 0603 NP0, 50 V	0.1			uF	
C11	±5%, 0603 NP0, 50 V	0.1			uF	
C12	±5%, 0603 NP0, 50 V	47			pF	
L1	±5%, 0603 Multilayer chip inductor	180	100	100	nH	Sunlord SDCL
L2	±5%, 0603 Multilayer chip inductor,	22	12	12	nH	Sunlord SDCL
L3	±5%, 0603 Multilayer chip inductor	cap 15pF	15	15	nH	Sunlord SDCL
L4	±5%, 0603 Multilayer chip inductor	33	6.2	6.2	nH	Sunlord SDCL
L5	±5%, 0603 Multilayer chip inductor	33	6.2	6.2	nH	Sunlord SDCL
L6	±5%, 0603 Multilayer chip inductor	27	15	15	nH	Sunlord SDCL
L7	±5%, 0603 Multilayer chip inductor	27	15	15	nH	Sunlord SDCL
L8	±5%, 0603 Multilayer chip inductor	68	12	12	nH	Sunlord SDCL
Y1	±10 ppm, SMD32*25 mm	26			MHz	EPSON
U1	CMT2300A, Ultra Low Power Sub-1GHz RF Transceiver				-	CMOSTEK

Table 15. Typical Application BOM for RF Switch Type

No.	Descriptions	Values		Unit	Supplier
		434 MHz +20 dBm	868 /915 MHz +20 dBm		
C1	±5%, 0402 NP0, 50 V	15	15	pF	
C2	±5%, 0402 NP0, 50 V	10	3.9	pF	
C3	±5%, 0402 NP0, 50 V	8.2	2.7	pF	
C4	±5%, 0402 NP0, 50 V	8.2	2.7	pF	
C5	±5%, 0402 NP0, 50 V	18nH	220	pF	
C6	±5%, 0402 NP0, 50 V	4.7	2	pF	
C7	±5%, 0402 NP0, 50 V	4.7	2	pF	
C8	±5%, 0402 NP0, 50 V	220	220	uF	
C9	±5%, 0402 NP0, 50 V	220	220	pF	
C10	±5%, 0402 NP0, 50 V	0.1		uF	
C11	±5%, 0402 NP0, 50 V	0.1		uF	
C12	±5%, 0402 NP0, 50 V	470		pF	
C13	±5%, 0402 NP0, 50 V	2200		pF	
C14	±5%, 0402 NP0, 50 V	4.7		uF	
C15	±5%, 0402 NP0, 50 V	24	24	pF	
C16	±5%, 0402 NP0, 50 V	24	24	pF	
C17	±5%, 0402 NP0, 50 V	10	10	pF	
C18	±5%, 0402 NP0, 50 V	10	10	pF	
C23	±5%, 0402 NP0, 50 V	47		pF	
L1	±5%, 0603 Multilayer chip inductor	180	100	nH	Sunlord SDCL
L2	±5%, 0402 Multilayer chip inductor	27	6.8	nH	Sunlord SDCL
L3	±5%, 0402 Multilayer chip inductor	18	12	nH	Sunlord SDCL
L4	±5%, 0402 Multilayer chip inductor	33	22	nH	Sunlord SDCL
L5	±5%, 0402 Multilayer chip inductor	15	10	nH	Sunlord SDCL
L6	±5%, 0402 Multilayer chip inductor	27	12	nH	Sunlord SDCL
L7	±5%, 0402 Multilayer chip inductor	27	12	nH	Sunlord SDCL
L8	±5%, 0402 Multilayer chip inductor	68	18	nH	Sunlord SDCL
Y1	±10 ppm, SMD32*25 mm	26		MHz	EPSON
U1	CMT2300A, Ultra Low Power Sub-1GHz RF Transceiver	-		-	CMOSTEK
U2	AS179, PHEMT GaAs IC SPDT Switch	-		-	SKYWORKS
R1	±5%, 0402	2.2	kΩ		
R2	±5%, 0402	2.2	kΩ		

4. Function Descriptions

CMT2300A is an ultra-low power, high performance transceiver chip. It supports OOK, (G) FSK and (G) MSK. It is suitable for applications in the range from 140 to 1020 MHz. The product belongs to CMOSTEK NextGenRF™ series. The series includes transmitters, receivers and transceivers and other complete product lines. CMT2300A block diagram is as shown in the following figure.

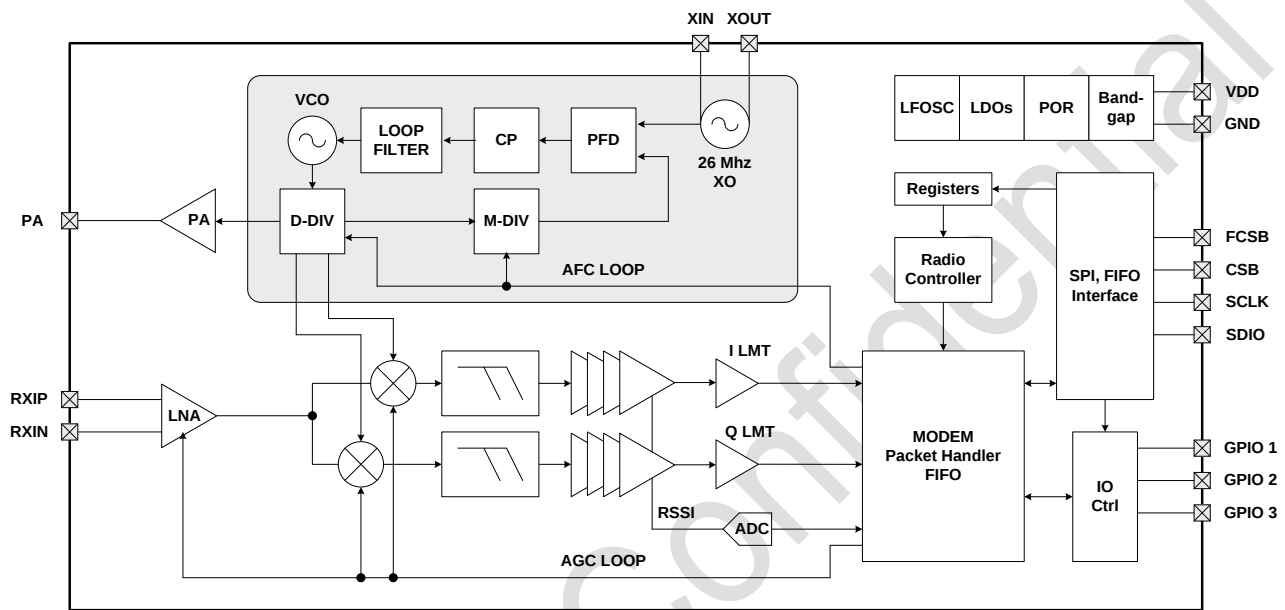


Figure 4. Functional Block Diagram

In the receiver part, the chip uses LNA+MIXER+IFFILTER+LIMITTER+PLL low-IF architecture to achieve the Sub-GHz wireless reception function. The chip uses PLL+PA architecture to achieve the Sub-GHz wireless transmitting function.

In the receiver system, the analog circuit mixes the RF signal to IF and converts the signal from analog to digital through the Limiter module, then outputs I/Q two single bit signals to the digital circuit for (G) FSK demodulation. At the same time, SARADC will convert the real-time RSSI signal to 8-bit digital signal, and sent them to the digital part for OOK demodulation and other processing. The digital circuit is responsible for mixing the intermediate frequency to zero frequency (Baseband) and performing a series of filtering and decision processing, while AFC and AGC control the analog circuit dynamically, finally the 1-bit original signal is demodulated. After demodulation, the signal will be sent to the decoder to decode and fill in the FIFO, or output to the PAD directly.

In the transmitter system, the digital circuitry will encode the data and then send them to the modulator (or send them to the modulator directly without encoding). The modulator will directly control the PLL and PA, modulate the data by (G) FSK or OOK and transmit them.

The chip provides the SPI communication port. The external MCU can configure the various functions by accessing to the register, control the main state machine, and access to the FIFO.

4.1 Transmitter

The transmitter is based on direct frequency synthesis technology. The carrier is generated by a low noise fractional-N frequency synthesizer. The modulated data is transmitted by an efficient single-ended power amplifier (PA). The output power can be read and written via registers, step by step from -20dBm to +20dBm with 1dB.

When the PA is switched fast, the varying input impedance will disturb the output frequency of the VCO instantaneously. The effect is called VCO pulling. It will generate the spurious and spurs on the spectrum around the desired carrier. The PA spurs can be reduced to a minimum instantaneously by the PA output power ramping. CMT2300A has a built-in PA ramping mechanism. When the PA Ramp is turned on, the PA output power can ramp the desired amplitude in a pre-configured rate, so as to reduce the spurs. In FSK mode, the signal can be filtered by a Gaussian Filter before transmitted, e.g. GFSK, which can reduce the spectral width and interference with neighboring channels.

According to different application requirements, the user can design a PA matching network to optimize the transmitting efficiency. The typical application schematic and the required BOM is shown in Chapter 3 "Typical application schematic". For more schematic details and layout guidelines, please refer to "AN141 CMT2300A Schematic and PCB Layout Design Guideline".

The transmitter can operate in direct mode and package mode. In the direct mode, the data to be transmitted can be sent to the chip by the DIN pin and transmitted directly. In the package mode, the data can be pre-loaded into the TX FIFO in STBY state, and transmitted together with other package elements.

4.2 Receiver

CMT2300A has a built-in ultra-low power, high performance low-IF OOK, FSK receiver. The RF signal induced by the antenna is amplified by a low noise amplifier, and is converted to an intermediate frequency by an orthogonal mixer. The signal is filtered by the image rejection filter, and is amplified by the limiting amplifier and then sent to the digital domain for digital demodulation. During power on reset (POR) each analog block is calibrated to the internal reference voltage. This allows the chip to remain its best performance at different temperatures and voltages. Baseband filtering and demodulation is done by the digital demodulator. The AGC loop adjust the system gain by the broadband power detector and attenuation network nearby LNA, so as to obtain the best system linearity, selectivity, sensitivity and other performance.

Leveraging CMOSTEK's low power design technology, the receiver consumes only a very low power when it is turned on. The periodic operation mode and wake up function can further reduce the average power consumption of the system in the application with strict requirements of power consumption.

Similar to the transmitter, the CMT2300A receiver can operate in direct mode and packet mode. In the direct mode, the demodulator output data can be directly output through the DOUT pin of the chip. DOUT can be assigned to GPIO1/2/3. In the packet mode, the demodulator data output is sent to the data packet handler, get decoded and is filled in the FIFO. MCU can read the FIFO by the SPI interface.

4.3 Additional Functions

4.3.1 Power-On Reset (POR)

The Power-On Reset circuit detect the change of the VDD power supply, and generate the reset signal for the entire CMT2300A system. After the POR, the MCU must go through the initialization process and re-configure the CMT2300A. There are two circumstances those will lead to the generation of POR.

The first case is a very short and sudden decrease of VDD. The POR triggering condition is, VDD dramatically decreases by 0.9V +/- 20% (e.g. 0.72V – 1.08V) within less than 2 us. To be noticed, it detects a decreasing amplitude of the VDD, not the absolute value of VDD as shown in the below figure.

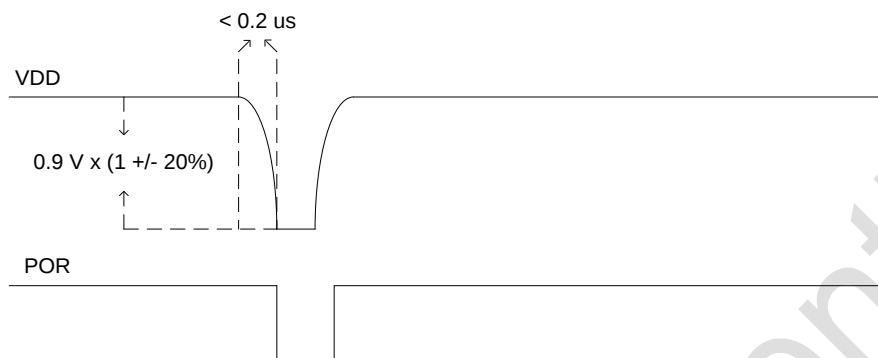


Figure 5. Sudden Decrease of VDD lead to Generation of POR

The second case is, a slow decrease of the VDD. The POR triggering condition is, VDD decreases to 1.45V +/- 20% (e.g. 1.16V – 1.74V) within a time more than or equal to 2 us. To be noticed, it detects an absolute value of VDD, not a decreasing amplitude.

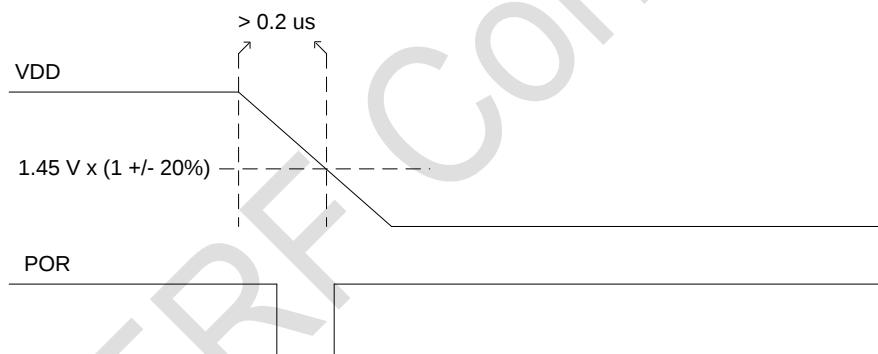


Figure 6. Slow Decrease of VDD lead to Generation of POR

4.3.2 Crystal Oscillator

The crystal oscillator provides a reference clock for the phase locked loop as well as a system clock for the digital circuits. The value of load capacitance depends on the crystal specified CL parameters. The total load capacitance between XI and XO should be equal to CL, in order to make the crystal accurately oscillate at 26 MHz.

$$C_L = \frac{1}{1/C15 + 1/C16} + C_{par} + 2.5pF$$

C15 and C16 are the load capacitances at both ends of the crystal. Cpar is the parasitic capacitance on the PCB. Each crystal pin has 5pF internal parasitic capacitance, together is equivalent to 2.5pF. The equivalent series resistance of the crystal must be within the specifications so that the crystal can have a reliable vibration. Also, an external signal source can be connected to the XI pin to replace the conventional crystal. The recommended peak value of this clock signal is from 300mV to 700mV. The clock is coupled to XI pin via a blocking capacitor.

4.3.3 Sleep Timer

The CMT2300A integrates a sleep timer driven by 32 kHz low power oscillator (LPOSC). When this function is enabled, the timer wakes the chip from sleep periodically. When the chip operates in a duty cycle mode, the sleep time can be configured from 0.03125 ms to 41922560 ms. Due to the low power oscillator frequency will change with the temperature and voltage drift, it will be automatically calibrated during power on and will be periodically calibrated since then. These calibrations will keep the frequency tolerance of the oscillator within + 1%.

4.3.4 Low Battery Detection

The chip sets up low voltage detection. When the chip is tuned to a certain frequency, the test is performed once. Frequency tuning occurs when the chip jumps from the SLEEP/STBY state to the RFS/TFS/TX/RX state. The result can be read by the LBD_VALUE register.

4.3.5 Received Signal Strength Indicator(RSSI)

RSSI is used to evaluate the signal strength inside the channel. The cascaded I/Q logarithmic amplifier amplifies the signal before it is sent to the demodulator. The logarithmic amplifier of I channels and Q channel contains the received signal indicator, in which the DC voltage is generated is proportional to the input signal strength. The output of RSSI is the sum of the values of the two channels' signals. The output has 80dB dynamic range above the sensitivity. After the RSSI output is sampled by the ADC and filtered by a SAR FILTER and a RSSI AVG FILTER. The order of the average filter can be set by RSSI_AVG_MODE<2:0>. The code value is translated into dBm value after filtering. Users can read the register RSSI_CODE<7:0> to obtain the RSSI code value, or RSSI_DBM<7:0> to obtain the dBm value. By setting the register RSSI_DET_SEL<1:0> Users can determine whether the RSSI is output to the MCU in real time, or latched at the instance when the preamble, sync, or the whole packet is received.

Also, CMT2300A allows the user to setup a threshold by RSSI_TRIG_TH<7:0> to compare with the real-time RSSI value. If the RSSI is larger than the threshold it outputs logic 1, otherwise outputs logic 0. The output can be used as a source of the RSSI_VLD interrupt, of the receive time extending condition in the super- low power (SLP) mode

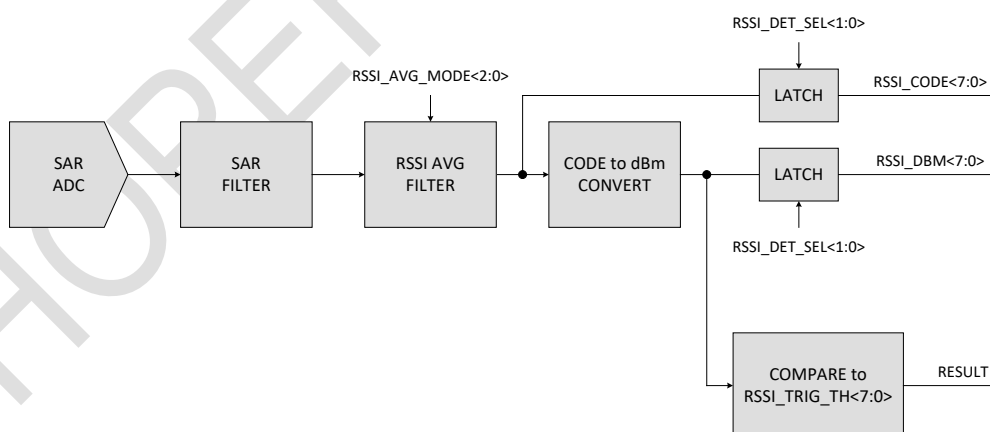


Figure 7. RSSI detection and comparison circuit

CMT2300A has done a certain degree of calibration before delivery. In order to obtain more accurate RSSI measurement results, the user needs to recalibrate the RSSI circuit in their dedicated applications. For further information, please refer to the “AN144-CMT2300AW RSSI Usage Guideline”.

HOPERF Confidential

4.3.6 Phase Jump Detector (PJD)

PJD is Phase Jump Detector. When the chip is in FSK demodulation, it can automatically observe the phase jump characteristics of the received signal to determine whether it is a wanted signal or an unwanted noise.




Figure 8. Received signal jump diagram

The PJD mechanism defines that the input signal switching from 0 to 1 or from 1 to 0 is a phase jump. Users can configure the PJD_WIN_SEL<1:0> to determine the number of detected jumps for the PJD to identify a wanted signal. As shown in the above figure, in total 8 symbols are received. But the phase jump only appeared 6 times. Therefore, the number of jumps is not equal to the number of symbols. Only when a preamble is received they are equal. In general, the more jumps are used to identify the signal, the more reliable they result in; the less jumps are used, the faster the result is obtained. If the RX time is set to a relatively short period, it is necessary to reduce the number of jumps to meet the timing requirements. Normally, 4 jumps allow a pretty reliable result, e.g. the chip will not mistakenly treat an incoming noise as a wanted signal, and vice versa will not treat a wanted signal as noise.

Detecting the phase jump of a signal, is identical to detect whether the signal has the expected data rate. In fact, at the same time, the PJD will also detect the FSK deviation and see if it is legal, as well as to see if the SNR is over 7 dB. With these three parameters the PJD is able to make a very reliable judgment. If the signal is wanted it outputs logic 1, otherwise outputs logic 0. The output can be used as a source of the RSSI VLD interrupt, or the receive time extending condition in the super low power (SLP) mode. In direct data mode, by setting the DOUT_MUTE register bit to 1, the PJD can mute the FSK demodulated data output while there is not wanted signal received.

The PJD technique is similar to the traditional carrier sense technique, but more reliable. While users combine the RSSI detection and PJD technique, they can precisely identify the status of the current channel.

4.3.7 Automatic Frequency Control (AFC)

The AFC mechanism allows the receiver to minimize the frequency error between the TX and RX in a very short time once a wanted signal comes in. This helps the receiver to maintain its highest sensitivity performance. CMT2300A has the most advanced AFC technology. Compare with the other competitors, within the same bandwidth, CMT2300A can identify larger frequency error, and remove the error in a much shorter time (8-10 symbols).

Normally the frequency error between the TX and RX is caused by the crystal oscillators used in both sides. CMT2300A allows the user to fill in the value of crystal tolerance (in PPM) on RFPDK. Based on the crystal tolerance, the RFPDK will calculate the AFC range while minimizing the receiver bandwidth (to maintain the best performance). Due to the excellent performance of the AFC, it provides a good solution to the crystal aging problem which would lead to more frequency error as time goes by.

Therefore, compare to other similar transceiver chips, CMT2300A can solve more severe crystal aging problem and effectively extend the life time of the product.

4.3.8 Clock Data Recovery (CDR)

The basic task of a CDR system is to recover the clock signal that is synchronized with the symbol rate, while receiving the data. Not only for decoding inside the chip, but also for outputting the synchronized clock to GPIO for users to sample the data. So CDR's task is simple and important. If the recovered clock frequency is in error with the actual symbol rate, it will cause data acquisition errors at the time of reception.

CMT2300A has designed three types of CDR systems, as follows:

1. **COUNTING system**—The system is designed for the symbol rates to be more accurate. If the symbol rate is 100% aligned, the unlimited length of 0 can be received continuously without error.
2. **TRACING system**—The system is designed to correct the symbol rate error. It has the tracking function. It can automatically detect the symbol rate transmitted by TX, and adjust quickly the local symbol rate of RX at the same time, so as to minimize the error between them. The system can withstand up to 15.6% or symbol rate error. Other similar products in the industry cannot reach this level.
3. **MANCHESTER system**—This system evolves from the COUNTING system. The basic feature is the same. The only difference is that the system is specially designed for Manchester codec. Special processing can be done when the TX symbol rate has unexpected changes.

4.3.9 Fast Frequency Hopping

The mechanism of fast frequency hopping is, based on the frequency configured on the RFPDFK, for instance 433.92 MHz, during applications the MCU can simply change 1 or 2 registers to quickly switch to another frequency channel. This simplify the way of change the RX or TX frequency in multiple channels application.

$$\text{FREQ} = \text{Base Freq} + 2.5 \text{ kHz} \times \text{FH_OFFSET} < 7:0 > \times \text{FH_CHANNEL} < 7:0 >$$

In general, the user can configure FH_OFFSET<7:0> during the chip initialization process. And then in the application, the user can switch the channel by changing FH_CHANNEL<7:0>.

When users need to use the fast frequency hopping in the RX mode, in some particular frequency points, one parameter of the AFC circuit must be re-configured. Please refer to “AN197-CMT2300A-CMT2119B-CMT2219B fast frequency hopping” and “CMT2300A-CMT2219B frequency hopping calculation tool” for more details.

5. Chip Operation

5.1 SPI Interface

The chip communicates with the outside through the 4-wire SPI interface. The CSB is the active-low chip select signal for accessing to the registers. The FCSB is the active-low select signal for accessing to the FIFO. They cannot be set to low at the same time. The SCLK is the serial clock. Its highest speed is 5MHz. The chip itself and the external MCU send the data at the falling edge of SCLK and capture the data at the rising edge of SCLK. The SDA is a bidirectional pin for input and output data. The address and data are transferred starting from the MSB.

When accessing to the register, CSB is pulled low. A R/W bit is sent first, followed by a 7-bit register address. After the external MCU pulls down the CSB, it must wait for at least half a SCLK cycle, and then send the R/W bit. After the MCU sends out the last falling edge of SCLK, it must wait for at least half a SCLK cycle, and then pull the CSB high.

To be noticed, when reading a register, MCU and CMT2300A will have to switch the direction of their IO (SDIO) between the address bit 0 and the data bit 7. It is required that the MCU switches the IO to input mode before send out the falling edge of the SCLK; CMT2300A should switch the IO to output mode after it has seen the falling edge of the SCLK. This avoids data contention of the SDIO (both of the MCU and CMT2300A set the SDIO to output mode at the same time), which would cause unexpected electrical problem.

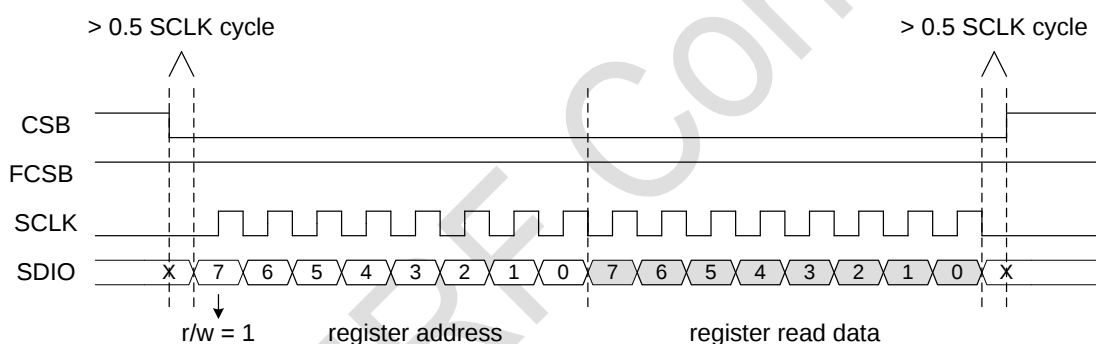


Figure 9. SPI read register timing

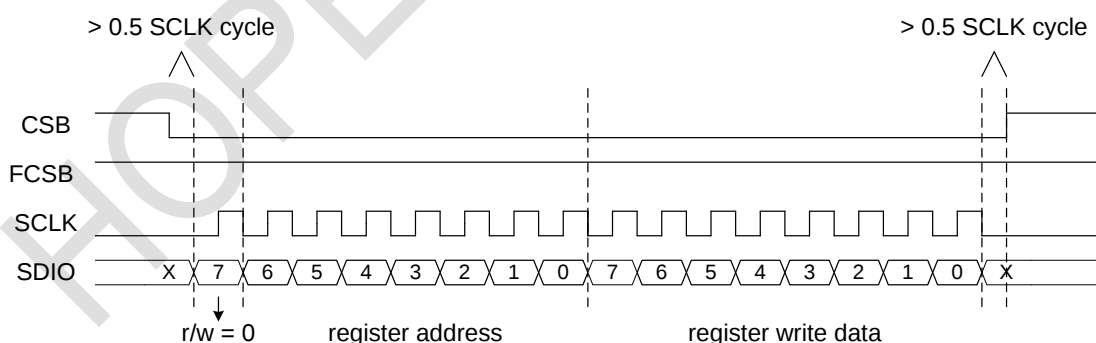


Figure 10. SPI write register timing

5.2 FIFO

CMT2300A provides two separated 32-byte FIFO by default. They are used for RX and TX, respectively. Users can also set FIFO_MERGE_EN to 1 to merge the two separated FIFO into one 64-byte FIFO. It can be used both under TX and RX. By configuring the FIFO_RX_TX_SEL to indicate whether it is currently used as TX FIFO or RX FIFO. When the two FIFO are not merged, users can fill in the TX FIFO while the RX FIFO is used to receive data in the RX mode.

The FIFO can be accessed via the SPI interface. The user can clear the FIFO by setting FIFO_CLR_TX or FIFO_CLR_RX to 1. Also, the user can re-send the old data in the TX FIFO by setting FIFO_RESTORE to 1, without the need of re-filling the data.

5.2.1 FIFO Read Operation

When the MCU accesses to the FIFO, the user must first configure a few registers to setup the FIFO read/write mode, as well as some other working mode. The details are introduced in "AN143-CMT2219B FIFO and Data Packet Usage Guideline". Here is the read-write timing diagram. Note that there is a slight difference in the control of the FCSB for accessing to the FIFO and the control of the CSB for accessing to the register. When the MCU starts to access to the FIFO, FCSB must be pulled down 1-clock cycle at first, and then send the rising edge of SCL. After the last falling edge of SCL is sent, the MCU must wait at least 2 μ s to pull up the FCSB. Between the adjacent read/write operations, the FCSB must be pulled high for 4 μ s at least. When writing the FIFO, the first bit data must be ready 0.5 clock cycles before sending the first rising edge of SCL.

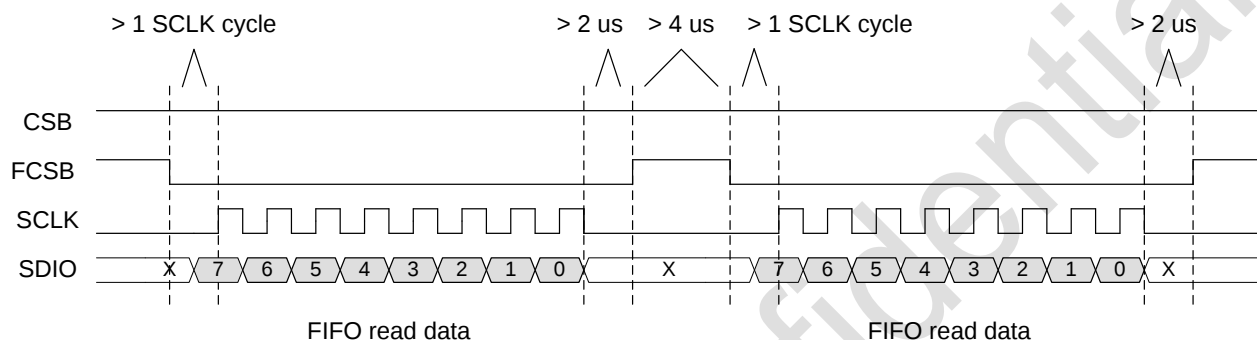


Figure 11. SPI read FIFO timing

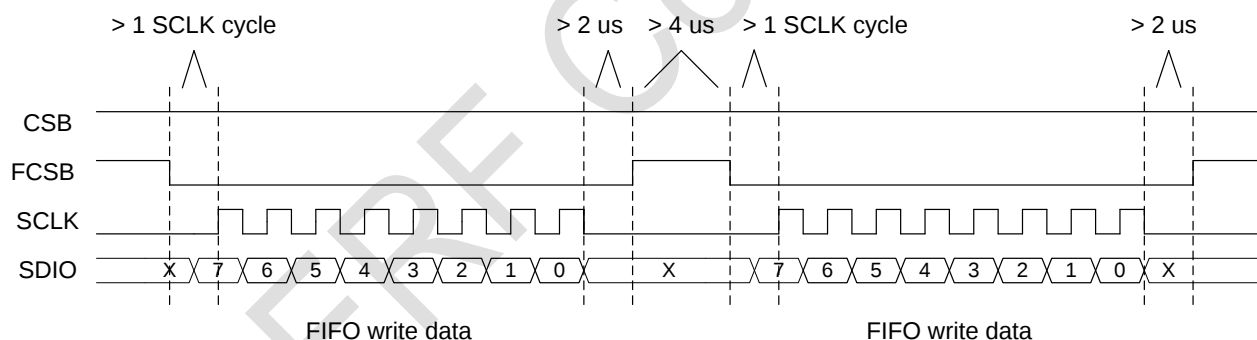


Figure 12. SPI write FIFO timing

5.2.2 FIFO Associated Interrupt

CMT2300A provides rich interrupt sources associated with the FIFO. The interrupt timing for Tx and Rx FIFO is shown below:

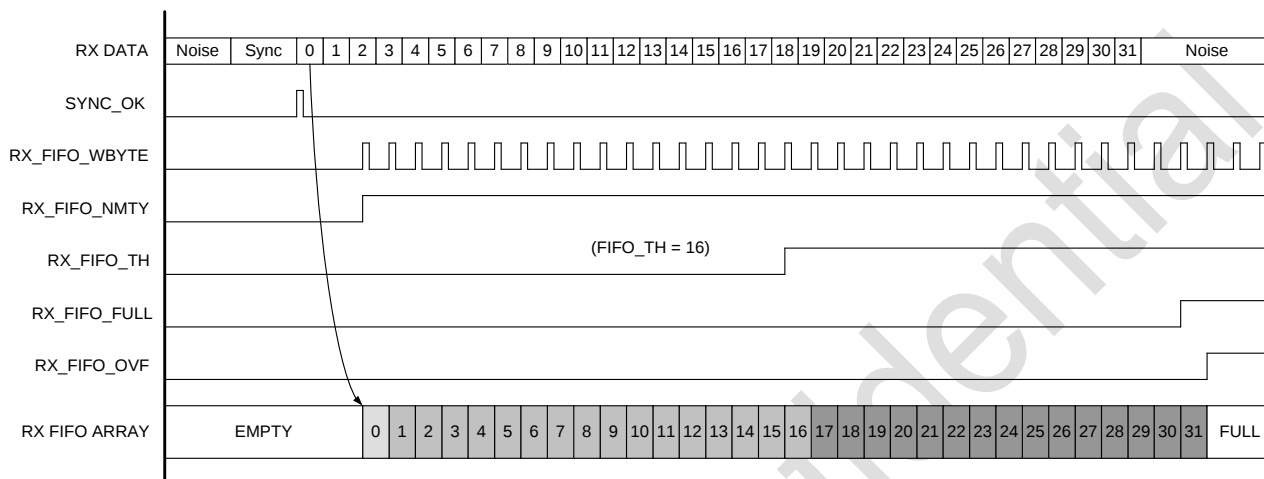


Figure 13. CMT2300ARX FIFO interrupt timing diagram

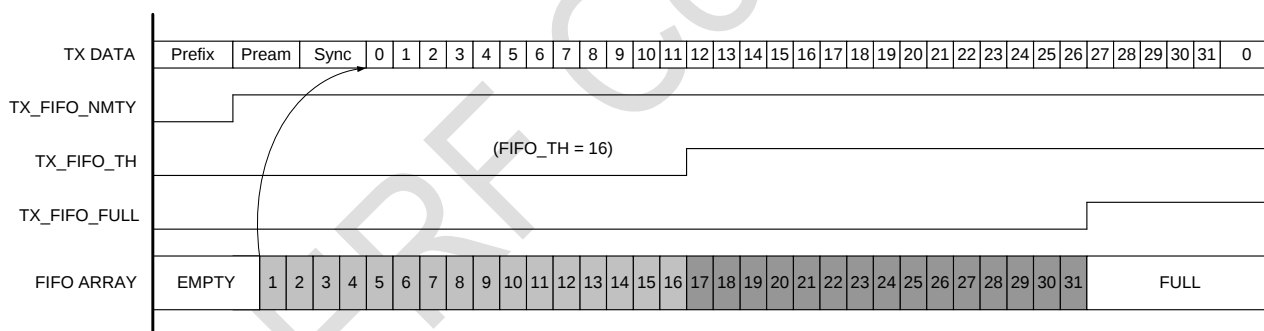


Figure 14. CMT2300A TX FIFO interrupt timing diagram

5.3 Operation State, Timing and Power Consumption

5.3.1 Startup Timing

After the chip VDD is powered up, the chip usually needs to wait about 1ms, then POR will release. After the release of the POR, the crystal will start, the start time is N ms, depending on the characteristics of the crystal itself. After starting, the user need to wait for the crystal settled, then the system starts working. The default setting is 2.48 ms. This time can be modified by writing XTAL_STB_TIME <2:0> afterword (it has to be longer than the crystal inherent settling time). The chip stays in IDLE state until the crystal is settled. After the crystal is settled, the chip perform calibration of each module and stay in SLEEP state after then to wait for initialization configuration by user. The chip will back to IDLE state and redo startup steps upon reset at anytime.

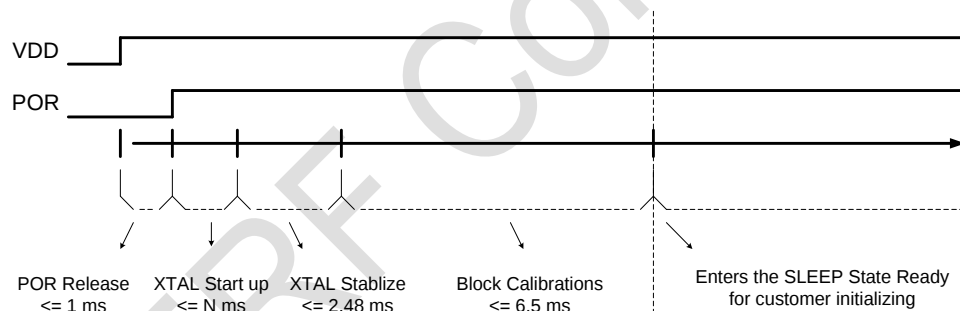


Figure 15. Power-on Timing

The chip enters SLEEP state after calibration. From then on, the MCU can control the chip to switch to different operation states through setting the register CHIP_MODE_SWT<7:0>.

5.3.2 Operation State

CMT2300A has 7 operation states: IDLE, SLEEP, STBY, RFS, RX, TFS and TX, as shown below.

Table 16. CMT2300A state and corresponding active module

State	Binary code	Switch command	Active Modules	Optional Moduels
IDLE	0000	soft_rst	SPI, POR	None
SLEEP	0001	go_sleep	SPI, POR, FIFO	LFOSC, Sleep Timer
STBY	0010	go_stby	SPI, POR, XTAL, FIFO	CLKO
RFS	0011	go_rfs	SPI, POR, XTAL, PLL, FIFO	CLKO
TFS	0100	go_tfs	SPI, POR, XTAL, PLL, FIFO	CLKO
RX	0101	go_rx	SPI, POR, XTAL, PLL, LNA+MIXER+IF, FIFO	CLKO, RX Timer
TX	0110	go_tx	SPI, POR, XTAL, PLL, PA, FIFO	CLKO

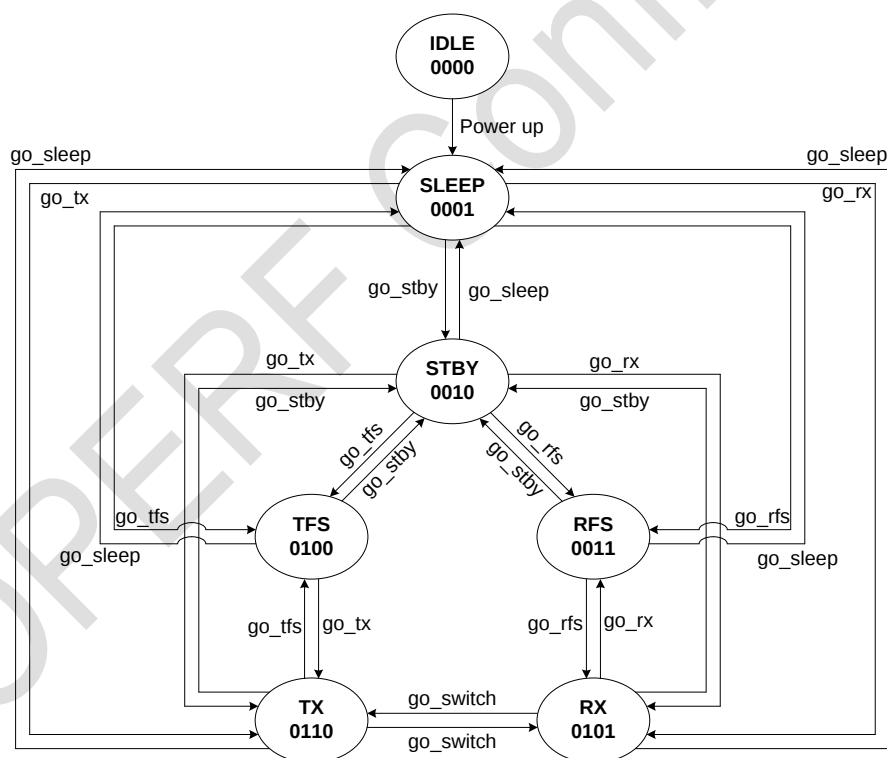


Figure 16. State Switch Diagram

■ SLEEP State

The chip power consumption is the lowest in SLEEP state, and almost all the modules are turned off. SPI is open, the registers of the configuration bank and control bank 1 will be saved, and the contents filled in the FIFO before will remain unchanged.

However, the user cannot operate the FIFO and cannot change the contents of the register. If the user opens the wake-up function, the LFOSC and the sleep counter will turn on and start working. The time required to switch from IDLE to SLEEP is the power up time. Switch from other state to SLEEP will be completed immediately.

■ STBY State

In STBY state, the crystal is turned on, the LDO of the digital circuit will also be turned on, the current will be slightly increased, and the FIFO can be operated. The user can choose whether to output CLK0 (system clock) to PIN. Because the crystal and LDO is turned on, compared to the SLEEP, the time switching from the STBY to transmitting or receiving will be relatively short. Switching from SLEEP to STBY will be completed after the crystal is turned on and settled. Switching from other state to STBY will be completed immediately.

■ RFS State

RFS is a transition state before switching to RX. Except that the receiver RF module is off, the other modules are turned on, and the current will be larger than STBY. Because PLL has been locked in the RX frequency, RFS cannot switch to TX. Switching from STBY to RFS probably requires PLL calibration and stability time of 350us. Switching from SLEEP to RFS needs to add the crystal start-up and stability time. Switching from other state to RFS will be completed immediately.

■ TFS State

TFS is a transition state before switching to TX. Except that the transmitter RF module is off, the other modules are turned on, and the current will be larger than STBY. Because PLL has been locked in the TX frequency, TFS cannot switch to RX. Switching from STBY to TFS probably requires PLL calibration and stability time of 350us. Switching from SLEEP to TFS needs to add the crystal start-up and settled time. Switching from other state to TFS will be completed immediately.

■ RX State

All modules on the receiver will be opened in RX state. Switching from RFS to RX requires only 20us. Switching from STBY to RX needs to add the PLL calibration and settled time of 350us. Switching from SLEEP to RX needs to add the crystal start-up and settled time. TX can be quickly switched to RX by sending go_switch command. Whether the TX and RX setting frequency is the same, the user need to wait for the PLL re-calibration and settled time of 350us to switch successfully.

■ TX State

All modules on the transmitter will be opened in TX state. Switching from TFS to TX requires only 20us. Switching from STBY to TX needs to add the PLL calibration and settled time of 350us. Switching from SLEEP to TX needs to add the crystal start-up and settled time. RX can be quickly switched to TX by sending go_switch command. Whether the RX and TX setting frequency is the same, the user need to wait for the PLL re-calibration and settled time of 350us to switch successfully.

5.4 GPIO and Interrupt

CMT2300A has 3 GPIO ports. Each GPIO can be configured as a different input or output. CMT2300A has 2 interrupt ports. They can be configured to different GPIO outputs.

Table 17. CMT2300A GPIO

Pin No.	Name	I/O	Function
16	GPIO1	IO	Configured as: DOUT/DIN, INT1, INT2, DCLK (TX/RX), RF_SWT
15	GPIO2	IO	Configured as: INT1, INT2, DOUT/DIN, DCLK (TX/RX), RF_SWT
8	GPIO3	IO	Configured as: CLK0, DOUT/DIN, INT2, DCLK (TX/RX)

Interrupt mapping table is as below. INT1 and INT2 mapping is the same. Take INT1 as an example.

Table 18. CMT2300A interrupt mapping table

Name	INT1_SEL	Descriptions	Clearing methods
RX_ACTIVE	00000	Indicates the chip is entering RX and is already in RX. It is 1 in PLL Tuning and RX state, and it is 0 in the other states.	Auto
TX_ACTIVE	00001	Indicates the chip is entering TX and is already in TX. It is 1 in PLL tuning and TX state, and it is 0 in the other states.	Auto
RSSI_VLD	00010	Indicates whether the RSSI is active.	Auto
PREAM_OK	00011	Indicates that the Preamble is received successfully.	by MCU
SYNC_OK	00100	Indicates that the Sync Word is received successfully.	by MCU
NODE_OK	00101	Indicates that the Node ID is received successfully.	by MCU
CRC_OK	00110	Indicates that the CRC for the current packet is correct.	by MCU
PKT_OK	00111	Indicates that a packet has been received.	by MCU
SL_TMO	01000	Indicates that the SLEEP counter timed out.	by MCU
RX_TMO	01001	Indicates that the RX counter timed out.	by MCU
TX_DONE	01010	Indicates that the TX operation is completed.	by MCU
RX_FIFO_NMTY	01011	Indicates that the RX FIFO is not empty.	Auto
RX_FIFO_TH	01100	Indicates the number of unread bytes of the RX FIFO is over FIFO TH	Auto
RX_FIFO_FULL	01101	Indicates RX FIFO is full.	Auto
RX_FIFO_WBYTE	01110	Indicates each time a byte is written to the RX FIFO. It is a pulse.	Auto
RX_FIFO_OVF	01111	Indicates RX FIFO is overflow	Auto
TX_FIFO_NMTY	10000	Indicates that TX FIFO is not empty	Auto
TX_FIFO_TH	10001	Indicates the number of unread bytes of the TX FIFO is over FIFO TH.	Auto
TX_FIFO_FULL	10010	Indicates TX FIFO is full.	Auto
STATE_IS_STBY	10011	Indicates that the current state is STBY.	Auto
STATE_IS_FS	10100	Indicates that the current state is RFS or TFS.	Auto
STATE_IS_RX	10101	Indicates that the current state is RX.	Auto
STATE_IS_TX	10110	Indicates that the current state is TX.	Auto
LBD	10111	Indicates that low battery is detected (VDD is lower than TH)	Auto
TRX_ACTIVE	11000	Indicates the chip is entering TX or RX and is already in TX or RX. It is 1 in PLL tuning, TX or RX state, and it is 0 in the other states.	Auto
PKT_DONE	11001	Indicates that the current packet has been received, covering 4 possible different situations. - The packet is received completely and correctly. - Manchester decoding has error. Decoder is automatically reset. - NODE ID receiving has error. Decoder is automatically reset. - Signal collision occurred. Decoder is not reset, waiting for MCU to response.	by MCU

By default, Interrupt is active high (logic 1 is valid). Users can set the INT_POLAR register bit to 1 to make all interrupts active low (logic 0 is valid). Taking INT1 as an example, the control and sources selection of all the available interrupts is shown below. The control and mapping of INT1 and INT2 are the same.

HOPERF Confidential

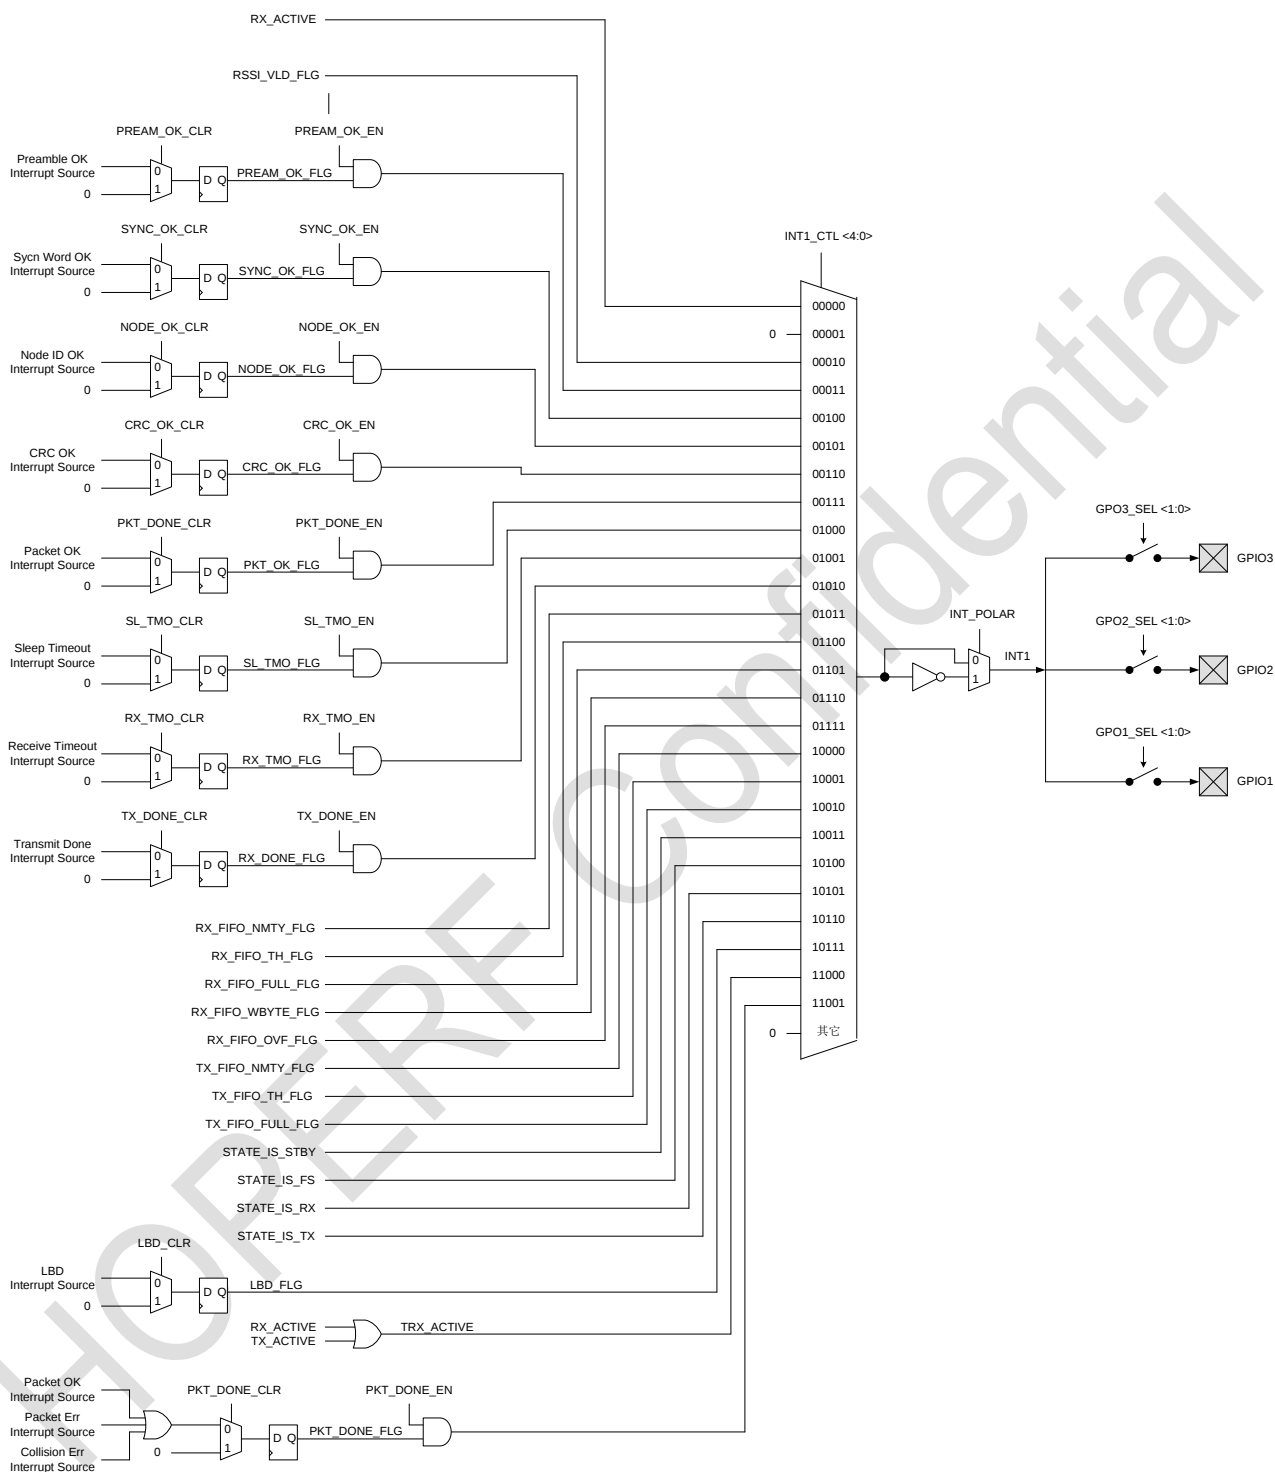


Figure 17. CMT2300A INT1 interrupt mapping diagram

6. Packet Handler

CMT2300A supports direct mode and packet mode:

- Direct Mode – In Rx mode, only supports preamble and sync detection, FIFO does not work, demodulated data sent out from GPIO. In Tx mode, only supports transmitting the data input from GPIO.
- Packet Mode – Supports all packet formats, demodulated data is stored in FIFO, accessed by SPI.

6.1 Direct Mode

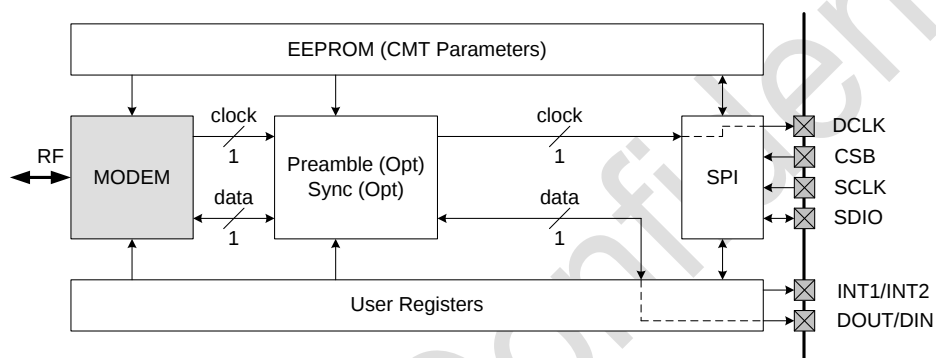


Figure 5. Direct mode data path

Rx processing

In direct mode, the data from the demodulator is sent directly to the external MCU via the DOUT pin. DOUT can be set to GPIO1, 2 or 3. The typical RX direct mode control sequence for the MCU is:

1. Configures GPIOs using the CUS_IO_SEL register.
2. Configures DATA_MODE = 0.
3. Send the go_rx command.
4. Capture the data from DOUT continuously.
5. Send the go_sleep/go_stby/go_rfs command to stop receiving and save the power.

Tx processing

In the direct mode, the data to be transmitted is sent directly to the chip from the external MCU by via DIN pin. The data rate is determined by the MCU but must be less than +/- 30% of the data rate configured on the RFPDK. The typical TX direct mode control sequence for the MCU is:

1. Set register TX_DIN_EN to 1 to enable DIN on GPIO.
2. Set TX_DIN_SEL to 0 to configure GPIO1 as DIN, or 1 to configure GPIO2 as DIN.
3. Send the go_tx command, send in the data to the DIN pin with the desired data rate, the data is transmitted immediately.
4. Send the go_sleep/go_stby/go_rfs command to stop transmission and save the power.

6.2 Packet Mode

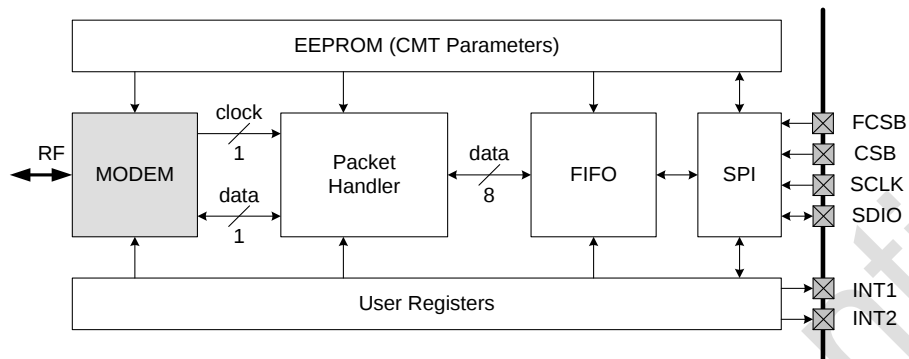


Figure 6. Packet mode data path

The packet handler supports the classic and more flexible packet format in both TX and RX mode. It includes variable packet format (Length in front of the Node ID), variable packet format (Length in the back of the Node ID) and fixed packet format. Each element in the packet supports flexible configurations, as shown below.

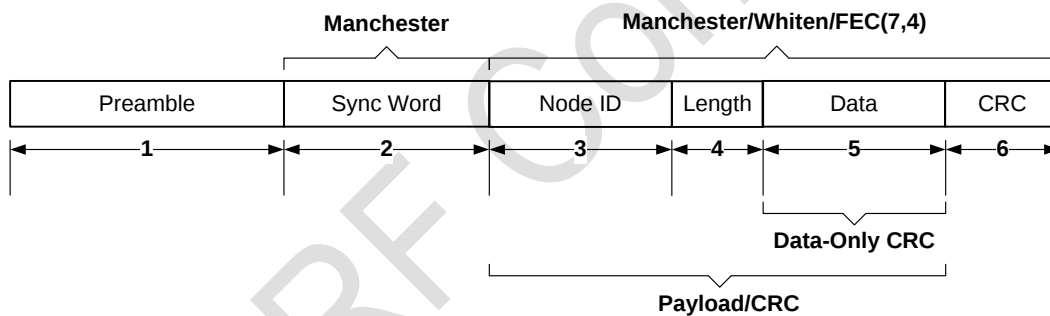


Figure 20. Variable length packet (Length in front of Node ID)

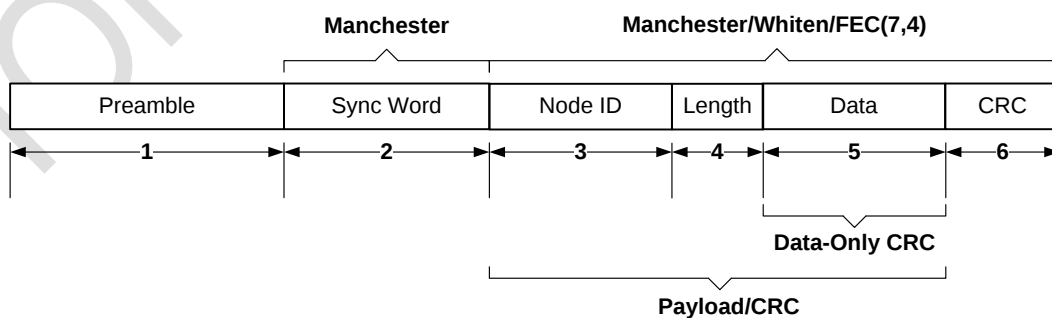


Figure 21. Variable length packet (Length behind Node ID)

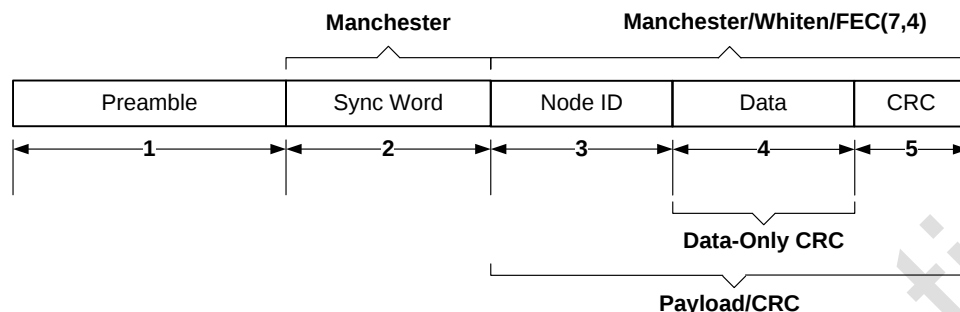


Figure 22. Fixed length packet

Rx processing

In the packet mode, the output data from the demodulator will be transferred to the packet handler for decoding, and then filled in the FIFO. The packet handler provides a variety of decoding mechanisms and options to determine the validity of the data. These can reduce the work load of the MCU. The typical package mode control sequence for the MCU is:

1. Configures GPIO using the CUS_IO_SEL register.
2. Setup the interrupts using CUS_INT1_CTL, CUS_INT2_CTL and CUS_INT_EN registers.
3. Send the go_rx command.
4. Reads the RX FIFO according to the relevant interrupts.
5. Sends the go_sleep/go_stby/go_rfs command to stop the receiving and save the power.
6. Clears the packet interrupts using CUS_INT_CLR1 and CUS_INT_CLR2 registers.

Tx processing

In the packet mode, MCU can fill the data in the FIFO in advance in the STBY and TFS state, or fill them in the FIFO while the chip sends the data, or use the combination of the above two methods. The typical Txpacket mode control sequence for the MCU is:

1. Configures GPIO using the CUS_IO_SEL register
2. Sends go_stby/go_tfs command when the data is filled in FIFO in advance.
3. Sends go_tx command.
4. Writes the data into FIFO according to the relevant interrupt status.
5. Sends go_sleep/go_stby/go_rfs command to save power.

CMT2300A has rich configurable hardware resources of FIFO, packet and their interrupts, which makes it compatible with most of the similar RF products in the market. For more details please refer to the interface of RFPDK and “AN143-CMT2300A FIFO and Data Packet Usage Guideline”.

7. Low Power Operation

7.1 Duty Cycle Operation Mode

CMT2300A makes the Tx and Rx work in duty cycle operation mode to save the power consumption. Among them, the Rx Duty Cycle can be classified into the following 5 modes.

Fully manual control.

1. Automatic SLEEP wakeup, switch to manual control.
2. Automatic SLEEP wakeup, automatically enter to RX, manually exit RX.
3. Automatic SLEEP wakeup, manually enter RX, automatically exit RX.
4. Fully automatic receive and sleep control.

The Tx Duty Cycle can be divided into the following 3 modes.

1. Manually enter TX, automatically exit TX
2. Automatic SLEEP wakeup, manually enter TX, automatically exit TX
3. Fully automatic transmit and sleep control

7.2 Super-low Power Rx Mode

The CMT2300A provides a series of options helping users achieving super-low power (SLP) Rx upon different application requirements. All these options are available only when RX_TIMER_EN is set as 1, namely Rx counter is active. The core function of SLP Rx is to reduce Rx time to the best during no-signal period meanwhile properly extend Rx time during signal existing time, then to reach stable Rx with minimum power consumption.

In general, traditional short-range wireless transceiver systems apply the solution as shown in the below figure to fulfill low-power transceiver. Based on the solution, the CMT2300A extends 13 solutions with better power consumption performance. Among them, a fundamental solution by setting RX_EXTEND_MODE<3:0> to 0 is shown in the below figure.

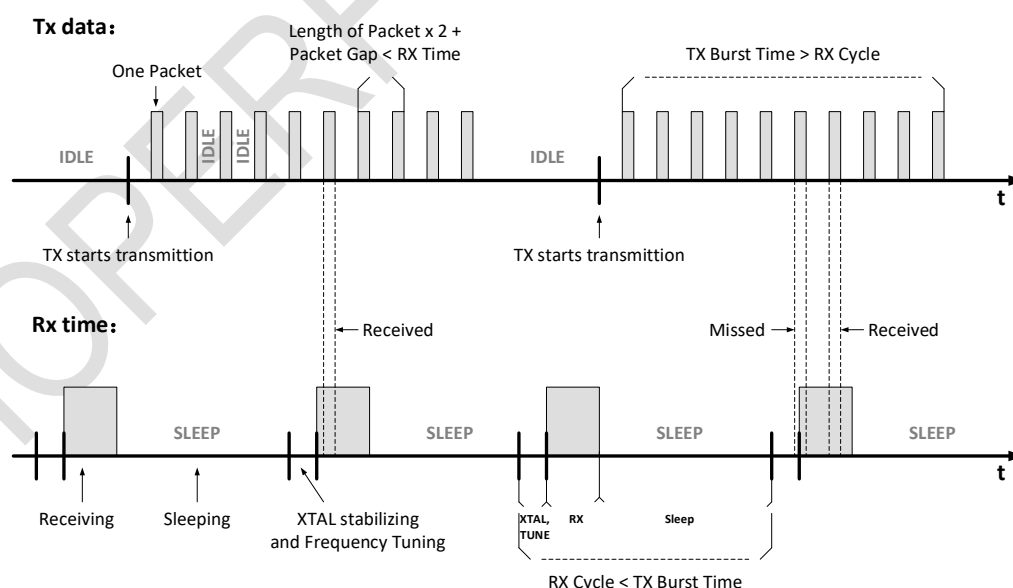


Figure 23. Basic low-power receiver scheme

The traditional low-power transceiver solution and the 13 extended low-power solutions based on it are listed in the below table.

Table 19. Low-power Rx mode

No.	Rx Extended Methods	Rx Extended Condition
0	No Rx extension is supported. Exit Rx state as soon as T1 timed out.	None
1	Once meet the Rx extended condition during T1, leave T1 and pass the control authority to MCU.	RSSI_VLD is valid.
2		PREAM_OK is valid.
3		RSSI_VLD and PREAM_OK are valid simultaneously.
4	Once detect RSSI_VLD = 1 during T1, leave T1 and stays in Rx state, exit Rx state until RSSI_VLD = 0.	RSSI_VLD is valid.
5	Once meet the Rx extended condition during T1, switch to T2. Exit Rx as soon as T2 timed out.	RSSI_VLD is valid
6		PREAM_OK is valid
7		RSSI_VLD and PREAM_OK are valid simultaneously.
8		Any one of PREAM_OK or SYNC_OK is valid.
9		Any one of PREAM_OK or NODE_OK is valid.
10	Once meet the Rx extended condition during T1, switch to T2. Leave T2 and pass the control authority to MCU as soon as SYNC is detected, otherwise exit Rx when T2 timed out.	Any one of PREAM_OK or SYNC_OK or NODE_OK is valid.
11		RSSI_VLD is valid.
12		PREAM_OK is valid.
13		RSSI_VLD and PREAM_OK are valid simultaneously.

The T1 and T2 mentioned in the table refer to the RX T1 and the RX T2 time interval that can be set via the registers or RFPDK. The source of RSSI_VLD can be the comparison result of the RSSI or the detection result of the phase jump detector (PJD). For more details, please refer to “AN146-CMT2300AW Low Power Mode Usage Guideline”

7.3 Receiver “Power VS Performance” Configuration

CMT2300A provides a set of registers to select the power consumption and sensitivity performance of the RF frontend circuit. The below table shows how they are configured:

Table 20. Low-power receiver mode

Current level	RF Performance	LMT_VTR<1:0>	MIXER_BIAS<1:0>	LNA_MODE<1:0>	LNA_BIAS<1:0>
Low	Low	2	2	1	1
Medium	Medium	2	2	1	2
High	High	1	2	3	2

8. User Register

CMT2300A is configured by writing in the registers. The register details are listed in the below table.

Table 21. CMT2300A Register Table

HOPERF Confidential

Addr	Name	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Function						
0x00	CUS_CMT0	User does not need to understand the details, just directly export the register contents from the RFPDK								CMT Bank						
0x01	CUS_CMT1															
0x02	CUS_CMT2															
0x03	CUS_CMT3															
0x04	CUS_CMT4															
0x05	CUS_CMT5															
0x06	CUS_CMT6															
0x07	CUS_CMT7															
0x08	CUS_CMT8															
0x09	CUS_CMT9															
0x0A	CUS_CMT10	System Bank														
0x0B	CUS_CMT11															
0x0C	CUS_CMT12															
0x0D	CUS_SYS1									SMF_VTR1[1:0]	LFOSC_CAL1_EN	LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x0E	CUS_SYS2									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x0F	CUS_SYS3									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x10	CUS_SYS4									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x11	CUS_SYS5									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x12	CUS_SYS6									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x13	CUS_SYS7									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x14	CUS_SYS8									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x15	CUS_SYS9									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x16	CUS_SYS10									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x17	CUS_SYS11									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x18	CUS_SYS12									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x19	CUS_SYS13									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x1A	CUS_SYS14									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x1B	CUS_SYS15									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x1C	CUS_SYS16									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x1D	CUS_SYS17									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x1E	CUS_SYS18									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x1F	CUS_SYS19									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x20	CUS_SYS20									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x21	CUS_SYS21									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x22	CUS_SYS22									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x23	CUS_SYS23									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x24	CUS_SYS24									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x25	CUS_SYS25									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x26	CUS_SYS26									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x27	CUS_SYS27									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x28	CUS_SYS28									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x29	CUS_SYS29									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x2A	CUS_SYS30									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x2B	CUS_SYS31									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x2C	CUS_SYS32									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x2D	CUS_SYS33									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x2E	CUS_SYS34									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x2F	CUS_SYS35									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x30	CUS_SYS36									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x31	CUS_SYS37									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x32	CUS_SYS38									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x33	CUS_SYS39									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x34	CUS_SYS40									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x35	CUS_SYS41									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x36	CUS_SYS42									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x37	CUS_SYS43									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x38	CUS_SYS44									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x39	CUS_SYS45									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x3A	CUS_SYS46									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x3B	CUS_SYS47									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x3C	CUS_SYS48									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x3D	CUS_SYS49									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x3E	CUS_SYS50									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x3F	CUS_SYS51									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x40	CUS_SYS52									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x41	CUS_SYS53									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x42	CUS_SYS54									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x43	CUS_SYS55									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x44	CUS_SYS56									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x45	CUS_SYS57									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x46	CUS_SYS58									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x47	CUS_SYS59									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x48	CUS_SYS60									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x49	CUS_SYS61									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x4A	CUS_SYS62									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x4B	CUS_SYS63									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x4C	CUS_SYS64									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x4D	CUS_SYS65									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x4E	CUS_SYS66									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x4F	CUS_SYS67									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x50	CUS_SYS68									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x51	CUS_SYS69									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x52	CUS_SYS70									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x53	CUS_SYS71									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x54	CUS_SYS72									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x55	CUS_SYS73									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x56	CUS_SYS74									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x57	CUS_SYS75									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x58	CUS_SYS76									LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]
0x59	CUS_SYS77	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x5A	CUS_SYS78	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x5B	CUS_SYS79	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x5C	CUS_SYS80	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x5D	CUS_SYS81	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x5E	CUS_SYS82	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x5F	CUS_SYS83	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x60	CUS_SYS84	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x61	CUS_SYS85	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x62	CUS_SYS86	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x63	CUS_SYS87	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x64	CUS_SYS88	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x65	CUS_SYS89	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x66	CUS_SYS90	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x67	CUS_SYS91	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x68	CUS_SYS92	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x69	CUS_SYS93	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x6A	CUS_SYS94	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x6B	CUS_SYS95	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x6C	CUS_SYS96	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x6D	CUS_SYS97	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x6E	CUS_SYS98	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x6F	CUS_SYS99	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x70	CUS_SYS100	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x71	CUS_SYS101	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x72	CUS_SYS102	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x73	CUS_SYS103	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x74	CUS_SYS104	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x75	CUS_SYS105	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x76	CUS_SYS106	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x77	CUS_SYS107	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x78	CUS_SYS108	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x79	CUS_SYS109	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x7A	CUS_SYS110	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x7B	CUS_SYS111	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x7C	CUS_SYS112	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x7D	CUS_SYS113	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x7E	CUS_SYS114	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x7F	CUS_SYS115	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x80	CUS_SYS116	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x81	CUS_SYS117	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x82	CUS_SYS118	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x83	CUS_SYS119	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x84	CUS_SYS120	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x85	CUS_SYS121	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x86	CUS_SYS122	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x87	CUS_SYS123	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x88	CUS_SYS124	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x89	CUS_SYS125	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x8A	CUS_SYS126	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x8B	CUS_SYS127	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x8C	CUS_SYS128	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x8D	CUS_SYS129	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x8E	CUS_SYS130	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x8F	CUS_SYS131	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x90	CUS_SYS132	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x91	CUS_SYS133	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x92	CUS_SYS134	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x93	CUS_SYS135	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x94	CUS_SYS136	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x95	CUS_SYS137	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x96	CUS_SYS138	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x97	CUS_SYS139	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x98	CUS_SYS140	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x99	CUS_SYS141	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x9A	CUS_SYS142	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x9B	CUS_SYS143	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x9C	CUS_SYS144	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x9D	CUS_SYS145	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x9E	CUS_SYS146	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL[1:0]								
0x9F	CUS_SYS147	LFOSC_CAL1_EN		LFOSC_CAL2_EN	TX_TIMER_EN	SLEEP_TIMER_EN	TX_DC_EN	TX_EXT_CTRL								

From the above table, it can be seen that the address range is from 0x00 to 0x71, which can be divided into 3 main banks for better understanding. They are: Configuration bank (including 6 sub-banks), Control Bank1, and Control Bank 2. For the 3 banks the address is continuous. They are all accessed via the SPI bus. They have different functionalities and design purposes, which are shown in the below table:

Table 22. Description of Register Banks

Address	Bank Name		Bank Name in the RFPDKExport File	Functionality
0x00-0x0B	Configuration Bank (RFPDK export the register values)	CMT Bank	CMT Bank	Users do not change them.
0x0C-0x17		System Bank	System Bank	Mainly relates to low power mode.
0x18-0x1F		Frequency Bank	Frequency Bank	To setup the TX and RX frequencies.
0x20-0x37		Data Rate Bank	Data Rate Bank	To setup data rate, deviation, bandwidths and other related parameters.
0x38-0x54		Baseband Bank	Baseband Bank	To setup packet format and some FIFO features.
0x55-0x5F		TX Bank	TX Bank	To setup TX deviation and power.
0x60-0x6A	Control Bank 1 (Set by MCU in application, not generated by RFPDK)		--	To setup chip working state, frequency hopping, GPIOs and interrupts control.
0x6B-0x71	Control Bank 1(Set by MCU in application, not generated by RFPDK)		--	To read interrupt flags and RSSI value, control the FIFO.

To simplify the operation, users should firstly setup all the desired parameters on the RFPDK, export the register contents to the HEX file, and use it to initialize the CMT2300A. For the CMT Bank, Frequency Bank, Data Rate Bank, and the TX Bank, users do not need to study the details of the registers. Instead, these register configurations totally rely on the RFPDK. For System Bank and Baseband Bank, users must study the details in order to play with them in different applications. Meanwhile, for Control Bank 1 and 2, users must also understand the meaning of each register.

CMOSTEK provides a series Application Notes (AN) for the users to study how to play with the chip, how to configure the parameters on RFPDK, how to use each register, and other notable application skills. Users can start their learning from reading "AN142 CMT2300AW Quick Start Guide", which provides step-by-step guidance and leads the users to read other documents.

9. Ordering Information

Table 23. CMT2300A ordering information

Part Number	Descriptions	Packaging	Packing	Condition	MOQ
CMT2300A-EQR ^[1]	CMT2300A, Ultra Low Power Sub-1GHz RF Transceiver	QFN16 (3x3)	Tape& Reel	1.8 to 3.6V, -40 to 85°C	3,000
Notes: [1]. “E” represents extended industrial grade. The temperature range is from -40 to +85. “Q” represents QFN16 packaging. “R” represents tape & reel packing. MOQ is 3000pcs.					

For more information about product, please visit www.hoperf.com.

For purchasing or price requirements, please [contact sales@hoperf.com](mailto:contact_sales@hoperf.com) or local sales representative

10. Packaging Information

CMT2300A packaging is QFN16 (3x3). The packaging information is as below.

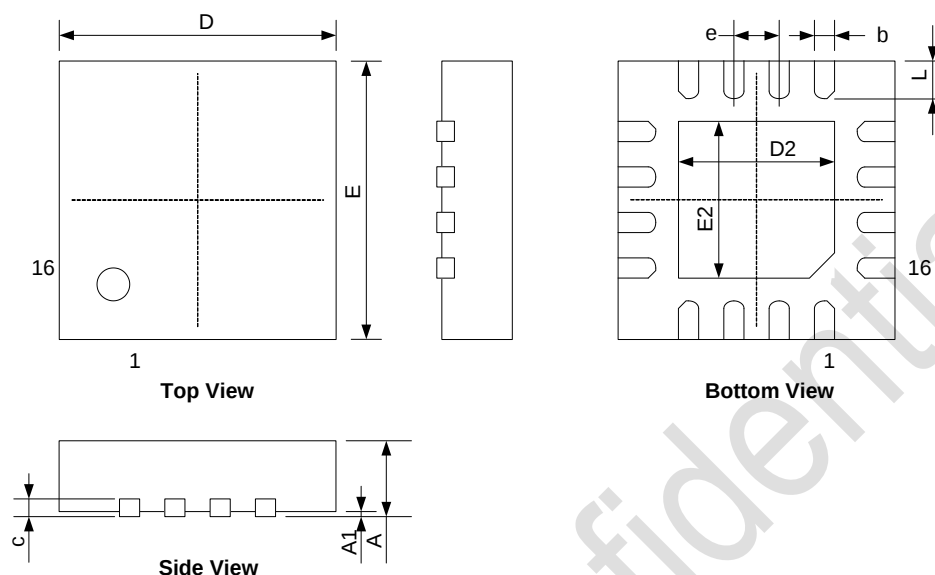


Figure 24. 16-Pin QFN 3x3 packaging

Table 24. 16-Pin QFN 3x3 packaging

Symbol	Size (mm)	
	Min.	Max.
A	0.7	0.8
A1	—	0.05
b	0.18	0.30
c	0.18	0.25
D	2.90	3.10
D2	1.55	1.75
e	0.50 BSC	
E	2.90	3.10
E2	1.55	1.75
L	0.35	0.45

11. Top Marking

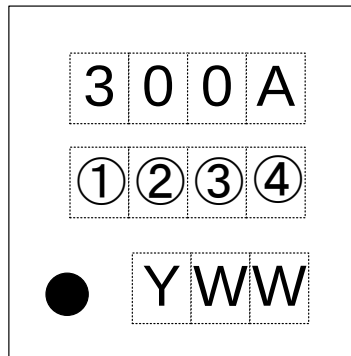


Figure 25. CMT2300A top marking

Table 25. CMT2300A top marking description

Marking method	Laser
Pin 1 mark	Circle diameter = 0.3 mm
Font size	0.5 mm, right aligned.
Line 1 marking	300A represents model CMT2300A
Line 2 marking	①②③④ represents the internal tracking coding
Line 3 marking	Date code is assigned by assembly factory. Y represents the last digit of the year. WW represents working week.

12. Revise History

Table 26. Revise History Records

Version No.	Chapter	Description	Date
Preliminary	All	Preliminary version for internal verification	2015-06-09
Preliminary 0.2	5.14.1	Update 1 st paragraph	2015-06-10
	5.14.2	Update Table 34	
0.6	All	Split Chapter 5 and 6 from Chapter 4	2015-08-06
0.7	All	Initial release for production version	2017-03-22
0.8	All	Changed T&R to 3,000 pcs Added AN document list Added new RF parameters and curves	2017-08-10
0.9	All	Added and changed some performance numbers Changed RSSI descriptions Added POR descriptions Added PJD, AFC and CDR descriptions Added receiver "Power VS Performance" descriptions Changed some characters and figures Detected the AN document list	2018-01-03
1.0	All	Changed some descriptions	2018-01-15
1.0a	All	Reformat on English version	2020-03-03
1.1	4.3.7	Remove document reference AN196	2020-09-09
1.2	1.11	Table 11, adjust SCLK related parameter values	2021-07-21
1.3	1.11	Table 11, adjust SCLK, V _{IH} related parameter values	2021-12-24
1.4	2, 3, 5.3.2	Section 2, add notes for some pins when they are used in low-power applications. Section 3, modify typical schematic diagrams of both direct-tie and switch-type and the corresponding component BOMs: remove capacitors for SCLK/SDIO/FCSB pins and keep the capacitor for CSB pin only. Section 5.3.2, figure 16, modify some minor typo error.	2022-01-05
1.5	1.4	Added input impedance value in Table 4	2022-10-27
1.6	1.4	Change the Unit of Co-channel rejection, Adjacent channel rejection, Blocking, Image Rejection from dBc to dB.	2023-05-23

13. Contacts

Shenzhen Hope Microelectronics Co., Ltd.

Address: 30th floor of 8th Building, C Zone, Vanke Cloud City, Xili Sub-district, Nanshan, Shenzhen, GD, P.R. China

Tel: +86-755-82973805 / 4001-189-180

Fax: +86-755-82973550

Post Code: 518052

Sales: sales@hoperf.com

Website: www.hoperf.com

Copyright. Shenzhen Hope Microelectronics Co., Ltd. All rights are reserved.

The information furnished by HOPERF is believed to be accurate and reliable. However, no responsibility is assumed for inaccuracies and specifications within this document are subject to change without notice. The material contained herein is the exclusive property of HOPERF and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of HOPERF. HOPERF products are not authorized for use as critical components in life support devices or systems without express written approval of HOPERF. The HOPERF logo is a registered trademark of Shenzhen Hope Microelectronics Co., Ltd. All other names are the property of their respective owners.