Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Hyper Tough TS60292N

Hyper Tough 14-IN-1 Nut Driver Bit Set

Model: TS60292N

Introduction

The Hyper Tough 14-IN-1 Nut Driver Bit Set is a versatile tool designed for various fastening applications. This set combines common SAE and Metric nut driver sizes into a single, convenient system, making it an essential addition to any toolbox. The bit driver handle features a comfortable, non-slip grip for enhanced control and torque application.

Package Contents

- 1 x Bit Driver Handle with 1/4 inch Hex End
- 7 x SAE Nut Driver Bits (3/16", 1/4", 5/16", 11/32", 3/8", 7/16", 1/2")
- 7 x Metric Nut Driver Bits (5mm, 6mm, 7mm, 8mm, 10mm, 11mm, 12mm)



Image: All components of the Hyper Tough 14-IN-1 Nut Driver Bit Set, including the handle and two holders of nut driver bits.

Setup

Unpacking

Carefully remove all components from the packaging. Inspect the handle and all 14 nut driver bits for any signs of damage. Retain the packaging for future storage or transport if desired.





Image: The Hyper Tough 14-IN-1 Nut Driver Bit Set as it appears in its retail packaging.

Component Identification

The set consists of a main driver handle and two organized holders containing the nut driver bits. One holder contains the SAE (Standard American English) sizes, and the other contains the Metric sizes. Each bit is clearly marked with its size for easy identification.



Image: The Hyper Tough nut driver handle and all 14 individual nut driver bits laid out for clear identification.

Operating Instructions

Attaching Nut Driver Bits

1. Select the appropriate SAE or Metric nut driver bit size for your fastener.
2. Insert the hex shank end of the chosen bit into the 1/4 inch hex end of the driver handle.
3. Push firmly until the bit is securely seated in the handle. The hex end of the handle is designed to hold the bits firmly during use.



Image: A hand demonstrating the process of inserting a nut driver bit into the handle of the Hyper Tough tool.

Using the Nut Driver

Once the desired bit is attached, align the nut driver bit with the fastener (nut or bolt head). Apply firm, steady pressure and rotate the handle clockwise to tighten or counter-clockwise to loosen. The soft-grip handle is designed to provide maximum comfort and allow for effective torque application without slippage.

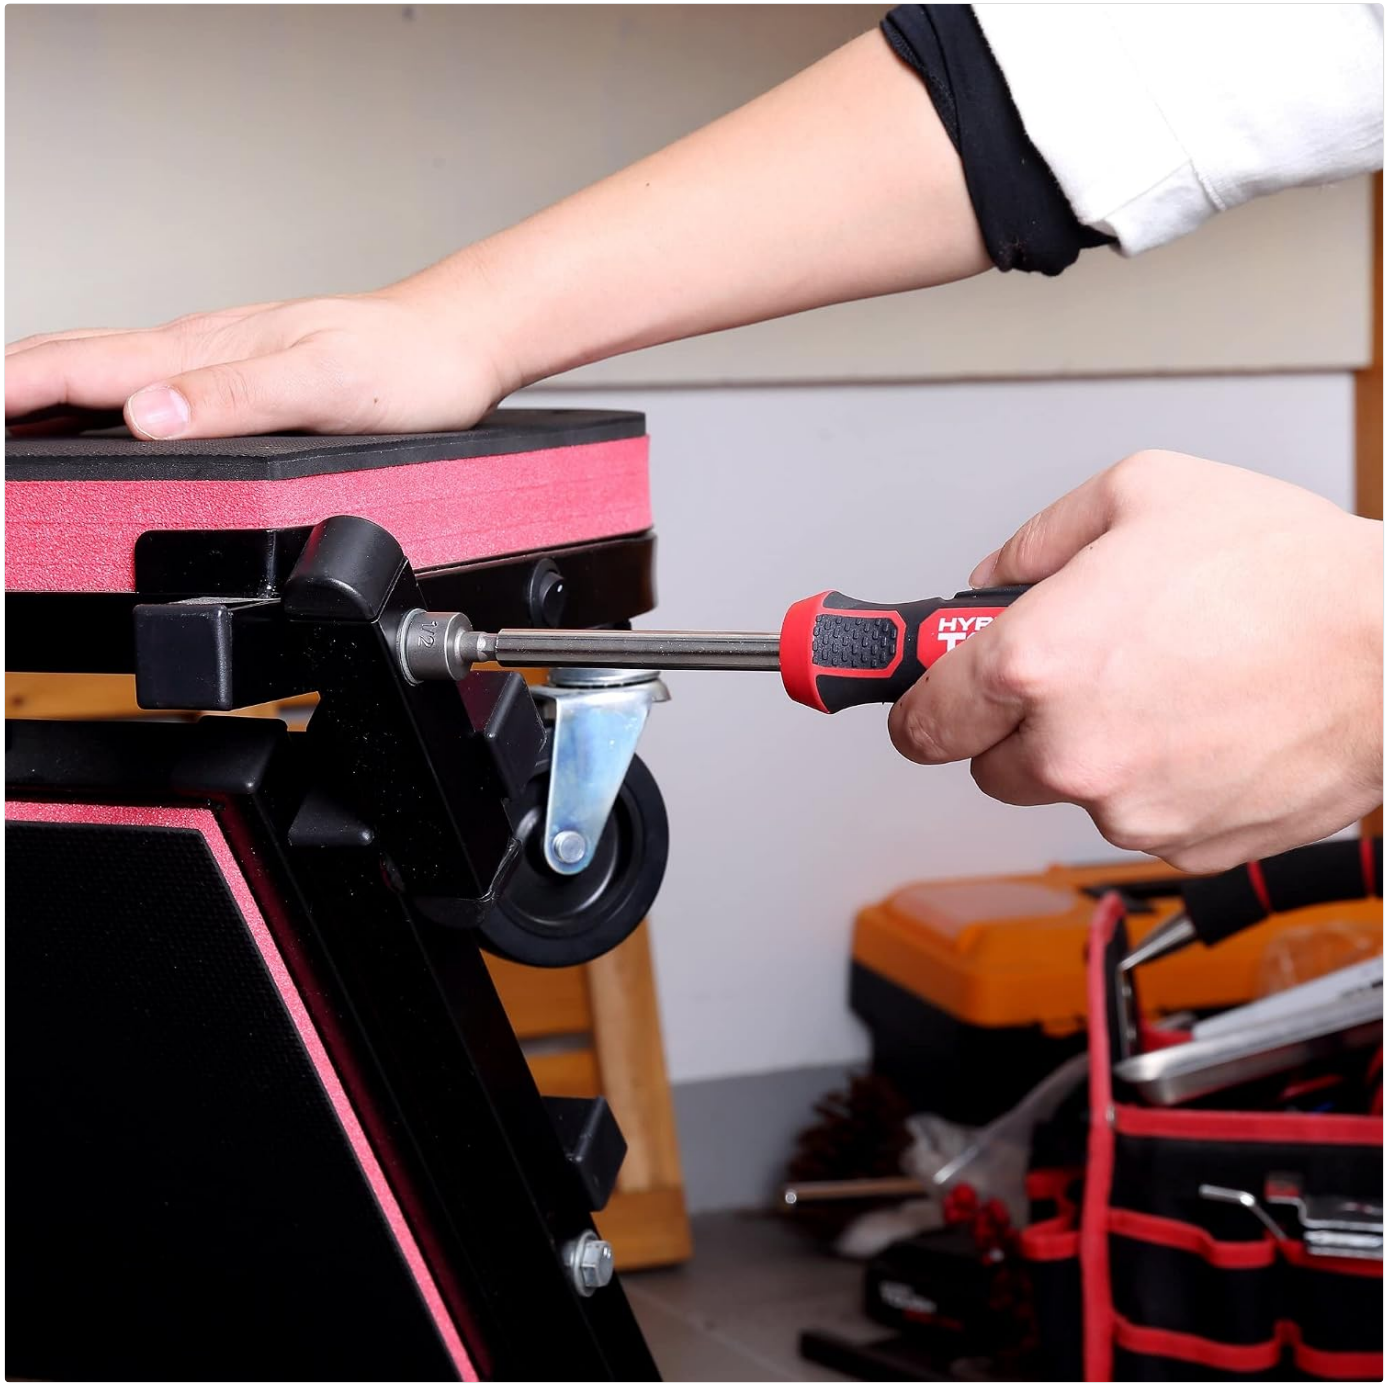


Image: A person using the Hyper Tough nut driver to work on a fastener on a wheeled utility cart.



Image: A person using the Hyper Tough nut driver to tighten a fastener on a workbench.

Maintenance

Cleaning

After each use, wipe down the handle and bits with a clean, dry cloth to remove any dirt, grease, or debris. For stubborn grime, a slightly damp cloth can be used, followed by immediate drying. Do not use abrasive cleaners or solvents, as these may damage the finish or grip material.

Storage

Store the Hyper Tough Nut Driver Bit Set in a dry environment to prevent rust or corrosion. Keep the bits organized in their respective holders to ensure easy access and prevent loss. The original packaging or a dedicated tool box is recommended for storage.

Troubleshooting

Problem	Solution
Bit slips out of handle	Ensure the bit is fully inserted into the hex end of the handle. Check for any debris in the hex opening that might prevent full seating.
Difficulty turning fasteners	Verify that the correct size bit is being used for the fastener. Ensure the bit is fully engaged with the fastener head. Apply firm, steady pressure.
Bits show signs of wear	Bits are made of durable alloy steel, but excessive force or improper use can cause wear. Replace worn bits as needed.

Specifications

Feature	Detail
Brand	Hyper Tough
Model Number	TS60292N
Material	Alloy Steel
Number of Pieces	14 (1 handle, 14 bits)
Drive System	Hex
Bit Shank Style	1/4 inch Hex
SAE Sizes	3/16", 1/4", 5/16", 11/32", 3/8", 7/16", 1/2"
Metric Sizes	5mm, 6mm, 7mm, 8mm, 10mm, 11mm, 12mm
Handle Grip	TPR (Thermoplastic Rubber) Soft-Grip
Item Weight	12.1 ounces
UPC	889526397456

Warranty and Support

Warranty Information

This Hyper Tough product comes with a 5-Year Limited Warranty. This warranty covers defects in material and workmanship under normal use. Please refer to the product packaging or contact customer support for full warranty terms and conditions.

Customer Support

For any questions, concerns, or assistance with your Hyper Tough 14-IN-1 Nut Driver Bit Set, please contact Hyper Tough customer support. Keep your purchase receipt and product model information handy when contacting support.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B09KJ52Y3Y

More documents and user manuals: **https://manuals.plus/**