Sinber HT3322S-S-9

Sinber HT3322S-S-9 33x22x9 Drop-In Single Bowl Kitchen Sink User Manual

Model: HT3322S-S-9

1. Safety Information

Please read all instructions carefully before installation and use. Failure to follow these instructions may result in property damage or personal injury.

- Always wear appropriate personal protective equipment (PPE) such as safety glasses and gloves during installation.
- Ensure all local plumbing and building codes are met.
- Turn off the main water supply before beginning any plumbing work.
- Handle the sink with care to avoid scratches or damage.
- Do not use abrasive cleaners or tools that could damage the sink's finish.

2. Package Contents

Verify that all components are present before beginning installation.

- Sinber HT3322S-S-9 Drop-In Single Bowl Kitchen Sink
- Mounting Hardware
- Cut-Out Template

Note: Faucet, drain assembly, and plumbing connections are not included and must be purchased separately.

3. Specifications

Brand	Sinber


Model Number	HT3322S-S-9
Material	304 Stainless Steel
Gauge	18 Gauge
Finish	Satin
Overall Dimensions (L x W x D)	33" x 22" x 9"
Bowl Depth	9 inches
Installation Type	Drop-In (Top Mount)
Minimum Base Cabinet Size	36 inches
Hole Count	1 (pre-drilled)
Drain Type	Lift and Turn (drain assembly not included)
Item Weight	25.5 pounds

SINK DIMENSIONS

Sinber
Drop in Kitchen Sink

HT3322S-9-S

length: 33″
Width: 22″
Depth: 9″

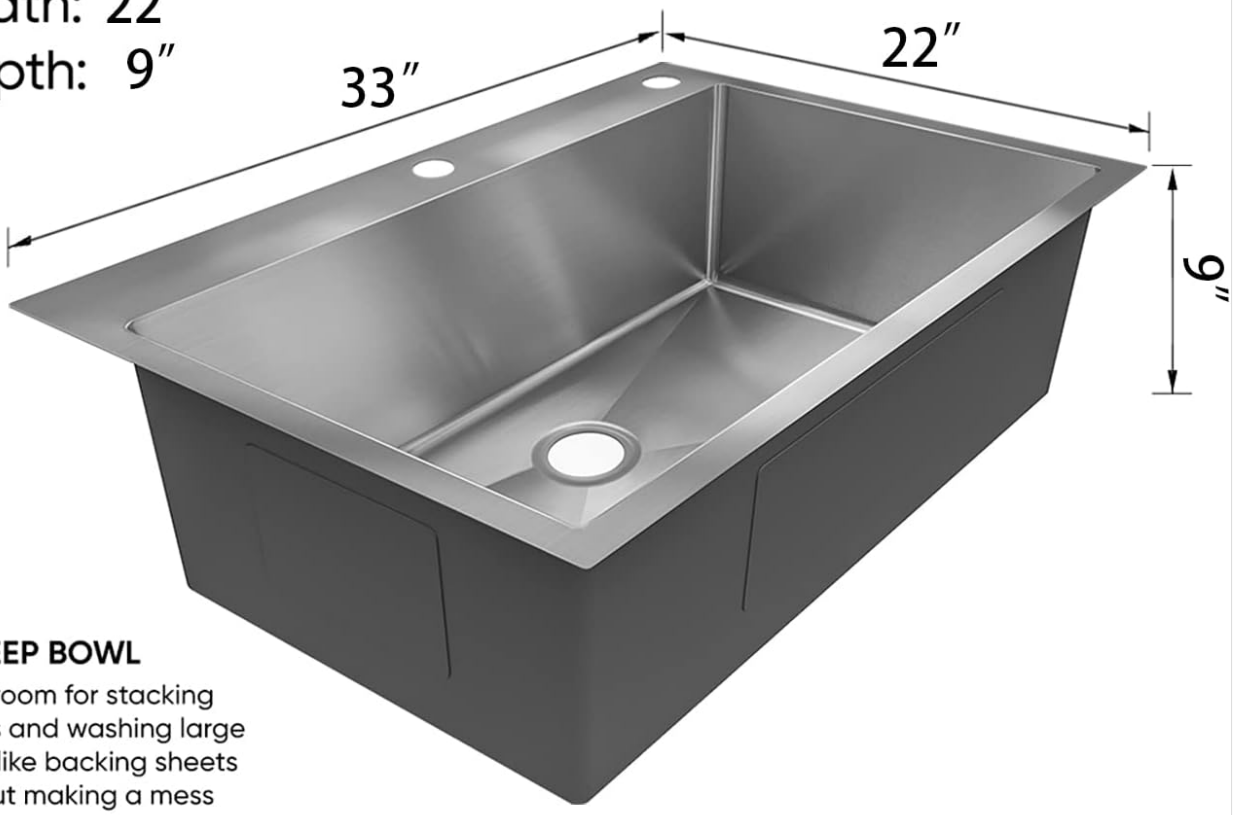

9″ DEEP BOWL
More room for stacking dishes and washing large items like backing sheets without making a mess

Sink Net Weight: 25.57lbs

Image: Detailed dimensions of the Sinber HT3322S-S-9 kitchen sink, showing length, width, and depth.

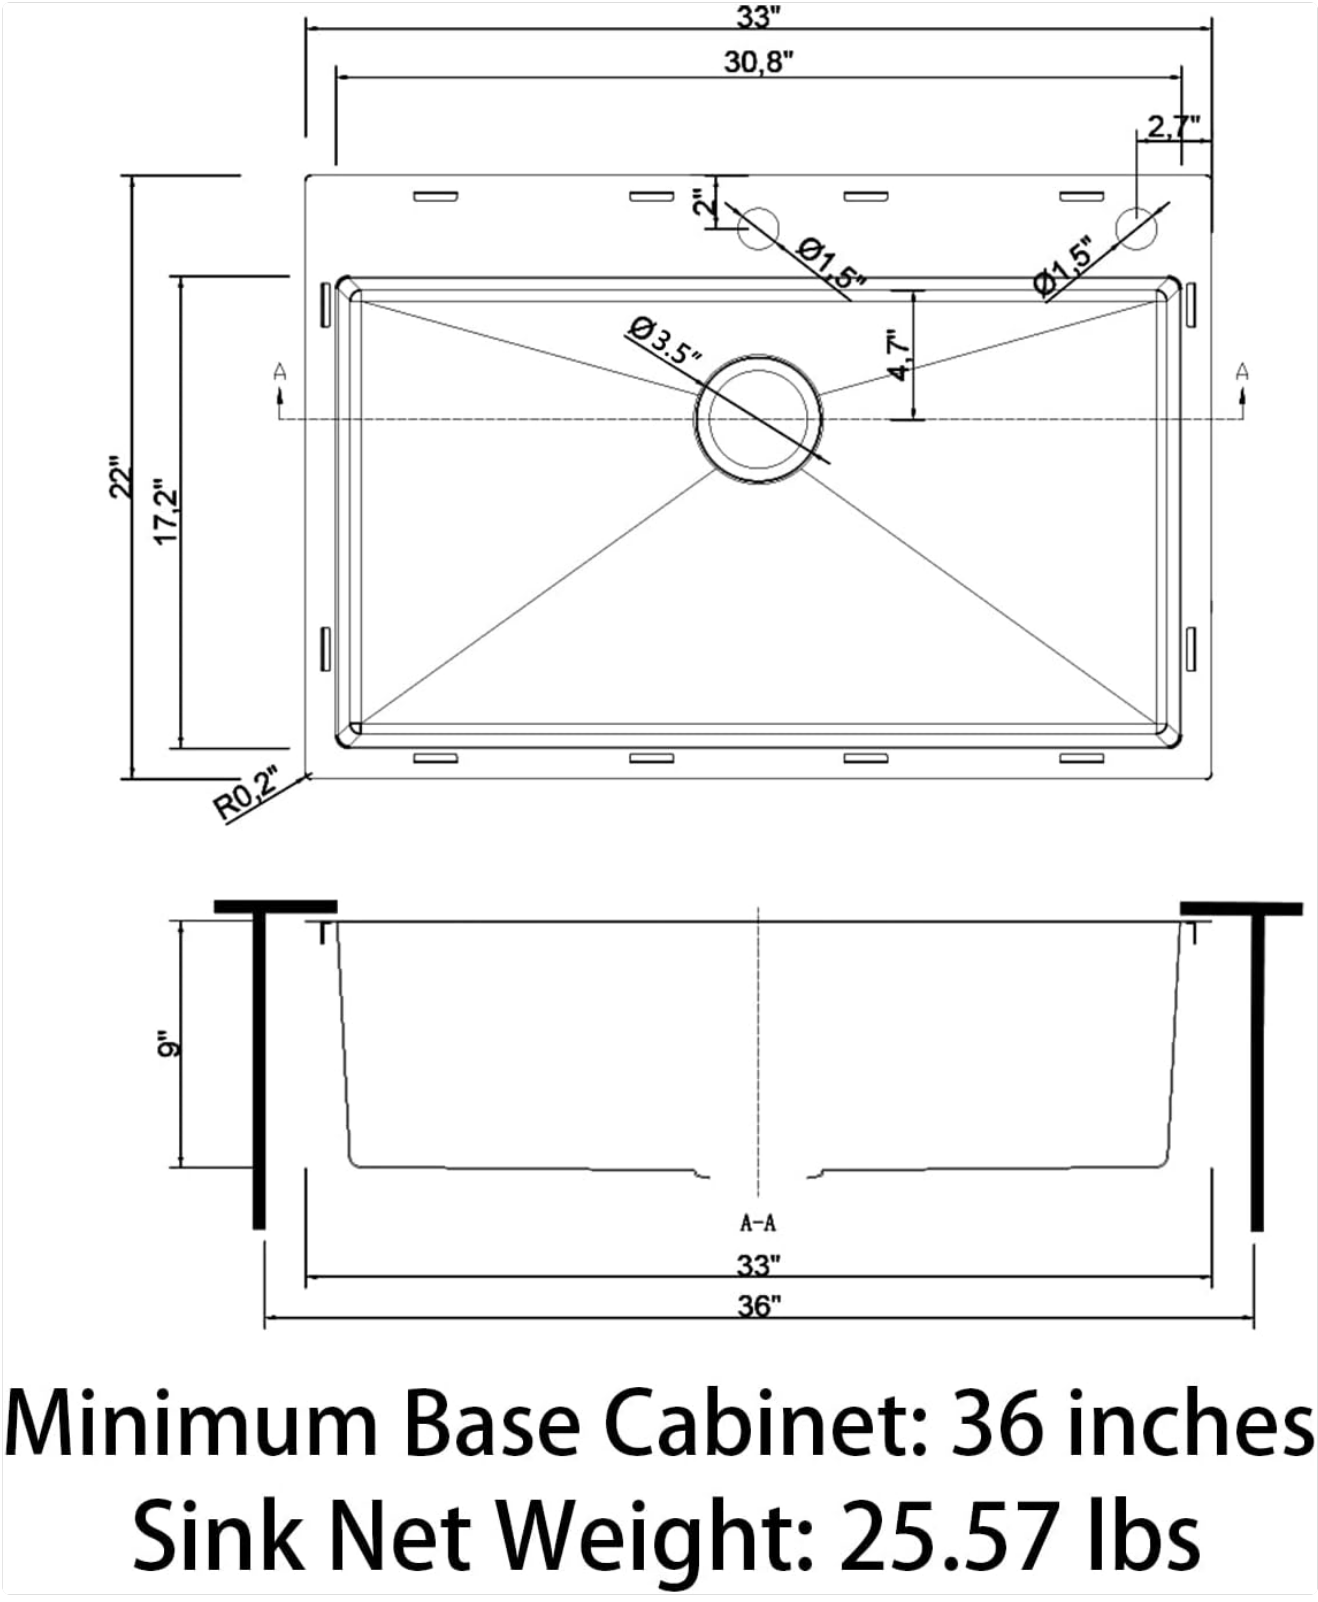


Image: Technical drawing of the Sinber HT3322S-S-9 sink, including cutout dimensions and drain hole placement.

4. Installation Instructions (Drop-In)

4.1 Tools and Materials Required (Not Included)

- Safety glasses and gloves
- Jigsaw or appropriate cutting tool for countertop material
- Drill
- Screwdriver

- Plumber's putty or silicone sealant
- Adjustable wrench
- Measuring tape and pencil

4.2 Countertop Preparation

1. **Position Template:** Place the provided cut-out template on the countertop in the desired sink location. Ensure adequate clearance from cabinets and walls.
2. **Trace Outline:** Secure the template with tape and carefully trace its inner edge onto the countertop with a pencil.
3. **Drill Pilot Holes:** Drill pilot holes inside the traced line, large enough to insert your jigsaw blade.
4. **Cut Opening:** Using a jigsaw or appropriate cutting tool, carefully cut along the traced line. Support the cutout piece to prevent it from falling and damaging the countertop.
5. **Clean Edges:** Smooth any rough edges of the cutout.

4.3 Sink Installation

1. **Install Faucet and Drain (Optional):** If your faucet and drain assembly require installation before the sink is dropped in, install them now according to their respective instructions.
2. **Apply Sealant:** Apply a bead of plumber's putty or silicone sealant around the perimeter of the sink's underside rim.
3. **Place Sink:** Carefully lower the sink into the countertop opening, ensuring it is properly seated and centered. Press down firmly to create a seal with the sealant.
4. **Attach Mounting Clips:** From underneath the countertop, insert the provided mounting clips into the channels along the underside of the sink rim. Rotate the clips to engage the countertop.
5. **Tighten Clips:** Using a screwdriver, gradually tighten the screws on the mounting clips. Alternate tightening clips around the sink to ensure even pressure. Do not overtighten, as this can damage the sink or countertop.
6. **Remove Excess Sealant:** Wipe away any excess plumber's putty or silicone sealant from around the sink rim.
7. **Connect Plumbing:** Connect the drain assembly and faucet water lines according to their instructions. Ensure all connections are tight and leak-free.
8. **Test for Leaks:** Turn on the main water supply and check for any leaks around the faucet, drain, and sink edges.



Image: Diagram illustrating the drop-in installation process, showing the sink being placed into the cutout and mounting clips securing it to the countertop.

5. Operating (Usage)

The Sinber HT3322S-S-9 sink is designed for everyday kitchen tasks. Its single, deep bowl accommodates large pots and pans, making dishwashing efficient.

- **Water Flow:** Use your installed faucet to control water flow and temperature.
- **Drainage:** The sink features an X-conducting wire design for efficient water drainage, preventing pooling.
- **Noise Reduction:** Equipped with rubber dampening pads and stone guard undercoating to minimize noise from water and dishware.



Image: The Sinber HT3322S-S-9 sink installed in a kitchen, showcasing its spacious single bowl design.



Image: Close-up view of the sink drain, highlighting the X-conducting wire design for improved water flow and quick drainage.



Image: Diagram illustrating the sound dampening material used on the underside of the sink to reduce noise during use.

6. Maintenance and Care

Proper care will help maintain the appearance and longevity of your stainless steel sink.

6.1 Daily Cleaning

- After each use, rinse the sink thoroughly with water to remove food particles and residue.
- Wipe the sink dry with a soft cloth to prevent water spots and mineral buildup, especially in hard water areas.
- For general cleaning, use a mild dish soap and a soft sponge or cloth.

6.2 Avoiding Damage

- **Avoid Abrasives:** Do not use steel wool, abrasive pads, or harsh chemical cleaners (e.g., bleach, ammonia-based cleaners) as they can scratch the surface or cause discoloration.
- **Prevent Scratches:** While 304 stainless steel is scratch-resistant, heavy or sharp objects can still cause marks. Use a sink grid (sold separately) to protect the bottom of the sink.
- **Rust Prevention:** Although stainless steel is rust-resistant, prolonged contact with iron-containing objects (e.g., cast iron pans, steel wool) can lead to rust spots. Remove such items promptly.
- **Heat Protection:** Avoid placing extremely hot pots or pans directly into the sink without protection, as extreme temperature changes can affect the finish over time.

6.3 Stain Removal

- For stubborn stains, use a non-abrasive stainless steel cleaner or a paste of baking soda and water. Apply with a soft cloth and rub in the direction of the grain. Rinse thoroughly and dry.
- For hard water spots, a solution of vinegar and water can be used. Apply, let sit for a few minutes, then rinse and dry.

7. Troubleshooting

Problem	Possible Cause	Solution
Water leaks around sink rim	Improperly applied sealant or loose mounting clips.	Ensure sealant is applied evenly and mounting clips are tightened securely. Reapply sealant if necessary.
Slow drainage	Drain clogged or improper drain assembly installation.	Check for obstructions in the drain. Ensure drain assembly is installed correctly and not restricting flow.
Water spots or mineral buildup	Hard water residue left to dry on the sink surface.	Wipe the sink dry after each use. Use a vinegar and water solution for existing spots.
Rust spots	Contact with iron-containing objects or harsh chemicals.	Remove rust spots with a non-abrasive stainless steel cleaner. Avoid leaving iron objects in the sink.

8. Warranty and Support

The Sinber HT3322S-S-9 kitchen sink comes with a **Limited Lifetime Warranty** from the manufacturer.
This warranty covers defects in material and workmanship under normal use and service for the lifetime of the original purchaser. It does not cover damage resulting from improper installation, abuse, misuse, accident, neglect, or normal wear and tear.
For warranty claims or technical support, please contact Sinber customer service through their official website or the retailer where the product was purchased. Please have your proof of purchase and model number ready.

9. Product Overview Video

Your browser does not support the video tag.

Video: An official product overview of the Sinber 33" Drop-In 304 Stainless Steel Kitchen Sink, highlighting its features and benefits.

© 2024 Sinber. All rights reserved.