

Marshall ML-454-V2 Quad 4.5 Inch Rack Mount Monitor with 3G-SDI HDMI and Composite Inputs User Manual

Home » Marshall » Marshall ML-454-V2 Quad 4.5 Inch Rack Mount Monitor with 3G-SDI HDMI and Composite Inputs User Manual ™

Contents

- 1 Marshall ML-454-V2 Quad 4.5 Inch Rack Mount Monitor with 3G-SDI HDMI and Composite Inputs
- **2 Product Information**
- **3 Product Usage Instructions**
- **4 OVERVIEW**
- **5 UNPACKING**
- **6 INSTALLATION**
- **7 BASIC OPERATION**
- **8 MENU FUNCTIONS**
- 9 SPECIFICATIONS
- **10 WARRANTY**
- 11 Documents / Resources
 - 11.1 References

Marshall

Marshall ML-454-V2 Quad 4.5 Inch Rack Mount Monitor with 3G-SDI HDMI and Composite Inputs



Product Information

The ML-454-V2 is a quad 4.5 rack mount monitor designed for use in broadcast A/V division. It provides four independent wide-screen displays in only 2RU rack height and very slim 1.4 (35.8 mm) depth. Each display has

inputs for 3GSDI, HDMI and standard composite (CVBS) analog video sources. The SDI digital inputs provide active loop-through connections while the composite input is self-terminating with passive loop-through. The controls are conveniently placed on the front panel (computer not required). Menus are straightforward and intuitive. Front panel headphone jacks allow monitoring of embedded digital audio (SDI and HDMI) as well as analog audio (for composite video AV input). On-screen three-color tally borders operate from standard GPI connections (contact closure or open-collector pull-down) for maximum compatibility with existing systems.


Product Usage Instructions

Inspect the unit for any physical damage that may have occurred during shipping. Should there be any damage, immediately contact Marshall Electronics at (800) 800-6608. If you are not located within the continental United States, call +1 (310) 333-0606.

Installation

The ML-454-V2 is designed to mount in a standard 19 equipment rack using the pre-installed mounting ears. Once mounted, the monitor may be tilted to the ideal viewing position. Care should be taken to allow sufficient slack in cables attached to the monitor so as not to bind when the monitor is tilted. Also, check that the ventilation holes are not obstructed by other equipment in the rack.


Connections, Power and Initial Setup

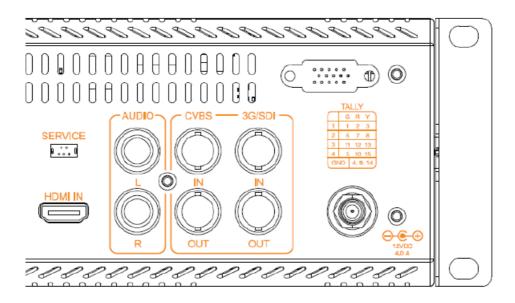

Note: Each screen has its own individual complement of video input connections. Power and TALLY connections go to all screens

- Power Connector: Connect the 12V DC input to the power input connector. Power can be supplied from the included power supply, or from a variety of DC sources supplying at least 4.0 Amps at 12 Volts. (Average power consumption 2.0 Amps at 12 Volts)
- 2. **TALLY Connector:** The tally border in each monitor is controlled by grounding the appropriate pin on the Tally connector as shown in the table.

Caution: External power should never be applied to the Tally connector. (The Tally connector has the same footprint as a VGA connector.)



Tally	Screen #1	Screen #2	Screen #3	Screen #4
GND	Green Border	Red Border	Yellow Border	
1				Green Border
2				Red Border
3				Yellow Border
6		Green Border		
7		Red Border		
8		Yellow Border		
11	Green Border			
12	Red Border			
13	Yellow Border			
5			Green Border	
10			Red Border	
15			Yellow Border	
4, 9, 14	Green Border	Red Border	Yellow Border	

Connect the required cables for video signal input and output. The monitor defaults to ON when power is connected. The Marshall name will first appear then the video will be automatically detected and displayed on the screen. If the video does not appear, press the INPUT button on the front panel to select an active source. SDI and CVBS inputs have active loop through connections. Active loop-through does not work if main power is removed from the monitor. Front power buttons have no effect on loop-through operation.

OVERVIEW

The ML-454-V2 provides four independent wide-screen displays in only 2RU rack height and very slim 1.4" (35.8 mm) depth. Each display has inputs for 3GSDI, HDMI and standard composite (CVBS) analog video sources. The SDI digital inputs provide active loop-through connections while the composite input is self-terminating with passive loop-through.

Controls are conveniently placed on the front panel (computer not required). Menus are straight- forward and intuitive. Front panel headphone jacks allow monitoring of embedded digital audio (SDI and HDMI) as well as analog audio (for composite video AV input). On-screen three-color tally borders operate from standard GPI connections (contact closure or open-collector pull-down) for maximum compatibility with existing systems.

UNPACKING

Carefully unpack the ML-454-V2 monitor and verify the following items are included:

- 1. ML-454-V2 Monitor
- 2. 12 Volt Power supply with AC cord. ML-454PS

Inspect the unit for any physical damage that may have occurred during shipping. Should there be any damage, immediately contact Marshall Electronics at (800) 800-6608. If you are not located within the continental United States, call +1 (310) 333-0606.

INSTALLATION

The ML-454-V2 is designed to mount in a standard 19" equipment rack using the pre-installed mounting ears. Once mounted, the monitor may be tilted to the ideal viewing position. Care should be taken to allow sufficient slack in cables attached to the monitor so as not to bind when the monitor is tilted. Also, check that the ventilation holes are not obstructed by other equipment in the rack.

CONNECTIONS, POWER AND INITIAL SETUP

Note: Each screen has its own individual complement of video input connections. Power and TALLY connections go to all screens

Power Connector

Connect the 12V DC input to the power input connector. Power can be supplied from the included power supply, or from a variety of DC sources supplying at least 4.0 Amps at 12 Volts. (Average power consumption 2.0 Amps at 12 Volts)

TALLY Connector

The tally border in each monitor is controlled by grounding the appropriate pin on the Tally connector as shown in the table. Caution: External power should never be applied to the Tally connector. (The Tally connector has the same "footprint" as a VGA connector.)

Tally	Green Border	Red Border	Yellow Border
Screen #1	1	2	3
Screen #2	6	7	8
Screen #3	11	12	13
Screen #4	5	10	15
GND	4, 9, 14		1

Plug the included power supply into an AC power source (100 - 240 Volts @ 50/60 Hz). Attach the power connector to the back of the monitor.

Connect the required cables for video signal input and output.

The monitor defaults to "ON" when power is connected. The Marshall name will first appear then the video will be automatically detected and displayed on the screen. If the video does not appear, press the INPUT button on the front panel to select an active source. SDI and CVBS inputs have active loop through connections. Active loop-through does not work if main power is removed from the monitor. Front power buttons have no effect on loop-through operation.

BASIC OPERATION


When main power is first applied to the ML-454-V2, the input selection defaults to the last used source. To see other sources, press the Input button to cycle through three choices: HDMI, SDI and AV (CVBS composite analog).

Headphone audio level may be quickly adjusted any time by pressing the ⁴and ▶buttons.

The power button for each screen is located just above the headphone jack. The button lights up green when the screen is ON.

To confirm that main power is being supplied to the internal components, a red LED light for each screen is visible through the ventilation holes on top.

FRONT PANEL CONTROLS

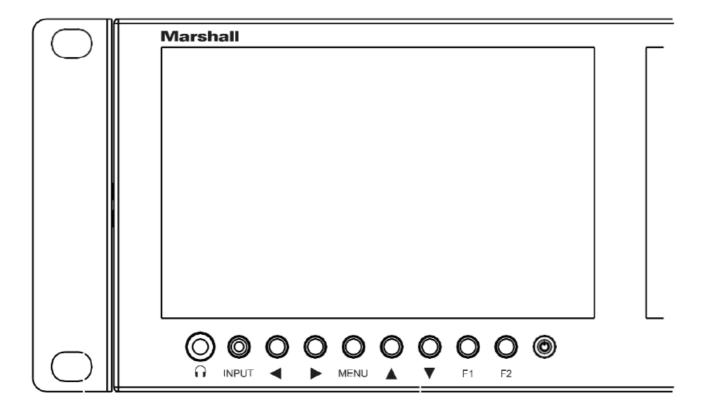

• - Headphone Jack

INPUT

• Select HDMI, SDI, AV sources

 $_{
m MENU}$ • - Headphone Volume and Menu navigation

◆ Open / Back / Close the main menu window

F1 & F2


– Menu Navigation

• Turn User Programmed Function On/Off

• - Power On/Off

MENU FUNCTIONS

When the Menu button is pressed, a screen similar to this picture appears showing five Main Menu categories. Use the arrow buttons to move to the desired category.

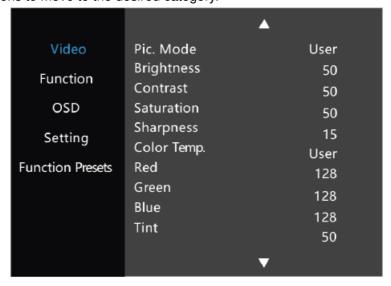

- Adjust Appearance: chroma saturation, brightness, etc.
- Pic. Mode: Select between three Presets and User setting.
- Standard: Settings are in their mid-range.
- Mild: Contrast and Saturation are reduced.
- User: Brightness, Contrast, Saturation and Sharpness can be adjusted individually. Dynamic: Contrast is boosted.
- Color Temp: Select 6500, 9300 or User.
- 6500: Display white balance approximates 6500K (standard).

9300: Display white balance approximates 9300K (cool).

User: Red, Green and Blue gains may be adjusted to achieve the desired white balance.

Tint: Used to correct issues with composite video sources. All colors are affected.

Tint is generally not applicable to digital video sources.

www.marshall-usa.com

Functions

Selecting On-Screen Markers;

- · Aspect Ratio, Image Flip, Peaking Filter and other Assistance Tools
- Center Marker: Places a cross marker in the exact center of the image.
- Safety Marker: Creates a border to indicate a safe area for camera framing Adjustable from 80% to 96% and 2.35 wide aspect.
- Marker Color: Select the high contrast marker color according to different image. Color choices are: Red, Green, Blue, Black and White.
- Check Field: Use the T to display a single primary color or no color (monochrome).
- **Peaking Filter:** This is a tool to assist setting sharp focus on a video camera. When this mode is ON, the picture will be monochrome with a red border around objects in the image. As the camera lens is adjusted, the red border will be brighter or dimmer. Brighter = sharper focus.
- **Aspect Ratio:** Select the displayed aspect ratio to fit the source.
- Full Screen: Picture is fit to just meet the edges of the display area.
- Pixel to Pixel: Image pixels are mapped 1:1 to display pixels. (Scaling off). In most cases, this will have the
 appearance of expanding the image.
- 4:3: Video is fit into a 4:3 window. This is a common setting for Standard Definition video.
- 16:9: Video is fit into a 16:9 window. This is the standard aspect ratio for HD video.
- Image Flip: Flip the displayed image to compensate for special lenses or mirrors.
- Image Freeze: Holds the current image on screen until Freeze is turned off.
- Zoom All: Expands the picture on the screen in all directions by tapping the button Default setting is "0".
- U/D Zoom: Expands the picture on screen vertically using the button.
- L/R Zoom: Expands the picture on the screen horizontally using the button.
- Scan Mode: Adjustable items are Standard & OverScan.
- Overscan: allows checking the picture out to the edges.

OSD

- OSD Horizontal Position: Adjust horizontal position of Menus
- OSD Vertical Position: Adjust vertical position of Menus
- OSD Menu Transparency: Adjust the menu background
- OSD Timeout: Set the number of seconds menu items will remain on the screen. Input Format OSD: Signal format/frame rate display

Setting

Choose menu language, factory reset and upgrade mode

- Language: Select the On-screen language for menus and messages.
- Backlight: Adjust the brightness of screen backlight. Compensates for ambient lighting.
- Factory Reset: Press the button to set the display back to its original (default) state.
- USB Upgrade: Initiate firmware update from a computer attached to the USB port.

Function Presets

- · Program the user Function buttons
- User buttons allow the quick selection of a function without entering the menu system

F1 & F2: Use the ◀▶ and ▲▼ buttons to choose a function from this list:

- · Center Marker
- · Safety Marker
- Marker Color
- Check Field
- · Peaking Filter
- Aspect
- Ratio Image
- Flip Image
- Freeze
- Scan Mode

SPECIFICATIONS

Panel size	4.46-inch TFT LCD		
Resolution	1280 x RGB x 720		
Backlight type	LED, Adjustable Brightness		
Dot pitch	0.0771mm x 0.0257mm		
Aspect radio	16:9		
Panel Bit Depth	True 8-bits (not dithered)		
Brightness (cd/m²)	500		
Contrast	1000:1		
Viewing angles	80°/80°(L/R) 80°/80°(U/D)		
Inputs	HDMI / 3GSDI / CVBS / Audio(L/R)		
Outputs	3GSDI / CVBS Loop Out		
AV	PAL - 4.43 / NTSC - 3.58		
	480i /480p /576i /576p (59.94/50)		
	720p (60/59.94/50/30/29.97/25/24/23.98)		
номі	1080i (60/59.94/50)		
	1080p (60/59.94/50/30/29.97/25/24/23.98)		
	ITU-R BT.656	576i	
	SMPTE-125M	480i	
		1080i (60/59.94/50)	
	SMPTE-274M	1080p (30/29.97/25/24/23.98)	
3G-SDI	SMPTE-296M	720p (60/59.94/50/30/29/25/24/23.98)	
	SMPTE-424M	1080p (60/59.94/50)	
Earphone jack	Stereo 3.5mm		
Input voltage	DC: 10~24 V (Typical 12 V)		
Power consumption	28 W (Typical)		
Power Connector	5.5 mm x 2.1 mm locking coaxial		
	19.0" W x 3.3" H x 1.4" D		
Dimensions	482.5mm W x 84mm H x 35.8mm D		
Weight (main body)	3.53lbs, 1.6kg		
	I		

WARRANTY

For Warranty information please refer to Marshall website page: https://marshall-ntest.org/

usa.com/company/warranty.php

• Address: 20608 Madrona Avenue, Torrance, CA 90503


• Tel: (800) 800-6608 / (310) 333-0606

• Fax: 310-333-0688

www.marshall-usa.com

• support@marshall-usa.com

Documents / Resources

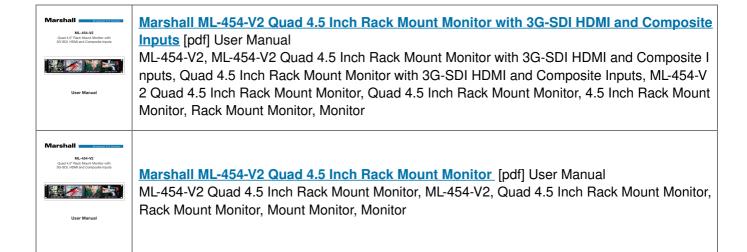

References

Marshall Electronics - Professional Broadcast Miniature/Compact/Indoor 4K/UHD/HD Cameras, 4K
 Rack Mount/Desktop Monitors, Hardware, and Accessories.

Manuals+,