



Mac Keyboard

Charge it first

Charge the keyboard from a computer or USB-C charger. A full charge from empty takes 5 hours, and lasts approximately 3 years (in typical use).

Contents [[hide](#)]

- [1 The Receiver stays plugged in](#)
- [2 Also works with BOTH receivers](#)
- [3 Also works as a WIRED keyboard](#)
- [4 Embedded number pad](#)
- [5 How the fn key works on Mac](#)
- [6 How to Pair to a new Receiver](#)
- [7 Warranty](#)
- [8 Programmable keys + Fn shortcuts](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)

The Receiver stays plugged in

Setup is simple... Plug one of the Receivers into your computer, then turn on the

keyboard.

The Receiver stays plugged in, for instant wireless reconnects — plus its small size makes it perfect for notebook users.

Press the POWER button to turn ON / OFF.

The Caps Lock indicator light will flash...

Green to indicate ON

or

Amber to indicate OFF

Also works with BOTH receivers

If you want to use the keyboard wirelessly with TWO computers, simply plug one receiver into each computer. When you turn ON the keyboard, it will automatically connect to one of them.


To switch the connection to the OTHER receiver, simply double-click the POWER button on the keyboard.

Also works as a WIRED keyboard

If you plug the keyboard into a computer (via a cable), it automatically switches to WIRED mode.

If you then unplug or press the POWER button, it switches back to WIRELESS mode and attempts to connect to one of the wireless receivers.

Embedded number pad

Pressing the  key toggles on & off the embedded numeric keypad.


What the Indicator Lights mean...

Flashing Green (1-2-3)	Keyboard ON
Flashing Amber (1-2-3)	Keyboard OFF
3 Flashes	Battery at / near FULL charge

2 Flashes	Battery HIGHER than 50%
1 Flash	Battery less than 50%
Flashing Red	Battery less than 10%
Flashing Blue	Pairing mode
Flashing Red	Macro key being programmed


How the fn key works on Mac

If you need to type F1 (rather than darken the screen) simply hold down fn and then press F1.




If this is not convenient, you can reverse it, via the System Settings:


newer Mac:


 menu > **System Settings**
 > **Keyboard**
 > **Keyboard Shortcuts**
 > **Function Keys**

and check the box, as shown below.

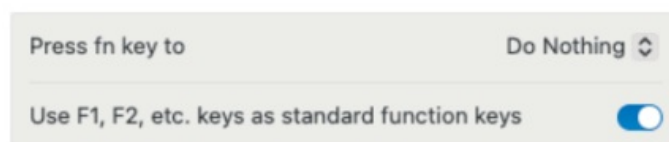

older Mac:

 menu > **System Preferences...**
 > **Keyboard**

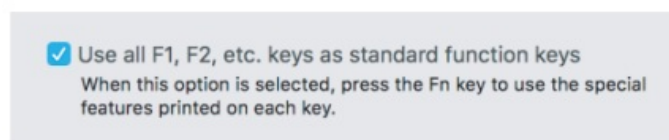

Unplug with USB-C Puller

Being so small, the wireless USB-C receiver is a little more difficult to unplug — especially with larger hands — so we've included a free Puller tool, making it easy... Simply place the Puller over the receiver, rotate a quarter turn, then pull the two ends together and out.



If you've lost a Receiver...

We have replacement receivers available.

Please contact... help@matias.ca

How to Pair to a new Receiver

Your keyboard is ALREADY paired to the receiver it came with, so you can skip this step, unless there are special circumstances — for example, pairing to a new replacement receiver.

You can pair any number of Matias keyboards or mice to the same Receiver. This is especially convenient for laptop users. For example, if you have a keyboard / mouse setup at home, and another at the office, you can plug one Receiver into your laptop and pair all the devices to that one receiver. Paired devices will automatically connect when they are in range.

1. Unplug any receivers that may be in range of the keyboard.
2. Hold down the Return key THEN press the POWER button UNTIL the Caps Lock light starts flashing Blue.
3. Plug the Receiver into your computer, THEN place the keyboard as close as possible to the Receiver.
4. When the indicator light stops flashing, pairing is complete.

Need help?

Please contact us at:

help@matias.ca

+1 [905-265-8844](tel:905-265-8844) or toll free 1-[888-663-4263](tel:888-663-4263)

Ergonomics

www.matias.ca/ergo

www.matias.ca/health

www.matias.ca/health/1

www.matias.ca/health/2

Warranty

Matias Corporation ("Matias") warrants to the original end user ("Customer") that this product will be free from defects in workmanship and materials, under normal use, for 2 years from the date of original purchase from Matias or its authorized reseller. Matias' sole obligation under this express warranty shall be (at Matias' option and expense) to repair or replace the product or part with a comparable product or part. All products or parts that are replaced become the property of Matias.

LIMITATION OF LIABILITY

To the full extent allowed by law, Matias excludes for itself and its suppliers any liability (whether based in contract or in tort, including negligence) for incidental, consequential, indirect, special or punitive damages of any kind, or for loss of revenue or profits, loss of business, loss of information or data, or other financial loss arising out of or in connection with the sale, installation, maintenance, use, performance, failure, or interruption of this product, even if Matias or its authorized reseller has been advised of the possibility of such damages, and limits its liability to replacement, repair, or refund of

the purchase price paid, at Matias' option. This disclaimer of liability for damages will not be affected if any remedy provided herein shall fail of its essential purpose. This keyboard contains no user-serviceable parts, and should not be opened or disassembled — risking damage to it and injury to you. Do NOT remove, crush, or puncture the battery inside, or expose it to high temperatures or liquids.

When this product reaches its end of life, please dispose of it according to your local environmental laws and guidelines.

The lithium-ion battery in the keyboard should be recycled or disposed of separately from household waste, by a qualified service provider.

FCC ID: WKM-FK413

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular Installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected..
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with FCC radiation exposure limits set forth for an uncontrolled environment and it also complies with Part 15 of the FCC RF Rules. This equipment must not be co-located or operating in conjunction with any other antenna or transmitter. End-users and installers must be provided with antenna installation instructions and consider removing the no-collocation statement.

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution!

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

IC: 30541-FK413

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic

Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

This product complies with the requirements of European Directives 72/23/EEC, 89/336/EEC, and 1999/5/EC.

Copyright © 2025 Matias Corp. All rights reserved. Matias Sculpted Keyboard, Matias, and the Matias logo are trademarks of the Matias Corporation. Mac, Apple, and the Apple logo are trademarks of Apple Inc. Windows and Sculpt are trademarks of Microsoft Corporation.

Warranty Procedure

1. Please contact our Help Desk at help@matias.ca, [905-265-8844](tel:905-265-8844) or toll-free 1-[888-663-4263](tel:888-663-4263), and give a detailed explanation of the problem.
2. We'll first try to solve your problem by e-mail or phone.
3. If e-mail / phone support is not successful, or if the item is defective, we'll give you an EMA number (Exchange Merchandise Authorization), and explain how to return the product for a replacement.
4. For more information, please visit: www.matias.ca/returns

Lock light starts blinking Red.

2. Type your desired sequence of keys.
3. Hold down the Esc key alone, until the Caps Lock light stops blinking, confirming completion.

How to reset a shortcut back to its default function

1. Hold down Esc and fn and the key to be reset, until the Caps Lock light starts blinking Red.
2. Hold down the Esc key alone, until the Caps Lock light stops blinking, indicating a successful reset.

How many characters can I assign to a programmable key or shortcut?

Approximately 60 characters.

“Approximately” because modifier keys (like Shift) count as 2 characters — press & release.

How to reset ALL keys back to their default functions

Hold down Esc and Backspace until the Caps Lock light blinks Red, indicating that the reset was successful.




Need help?

Please contact us at:

help@matias.ca



+1 [905-265-8844](tel:905-265-8844) or toll free 1-[888-663-4263](tel:888-663-4263)

Documents / Resources

	matias FK413D Mac Keyboard [pdf] User Manual FK413D, FK413D-US-UK, FK413D Mac Keyboard, Mac Keyboard, Keyboard
---	---

References

- [User Manual](#)

 FK413D, FK413D Mac Keyboard, FK413D-US-UK, Keyboard, Mac Keyboard,
 matias matias

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.