



# MEAN WELL DRA-60-12 Single Output Switching Power Supply Instruction Manual

[Home](#) » [MEAN WELL](#) » MEAN WELL DRA-60-12 Single Output Switching Power Supply Instruction Manual 

MEAN WELL DRA-60-12 Single Output Switching Power Supply



## Contents

- 1 Feature
- 2 Applications
- 3 GTIN CODE
- 4 Description
- 5 Model Encoding
- 6 SPECIFICATION
- 7 Block Diagram
- 8 Derating Curve
- 9 Static Characteristics
- 10 Output Current Adjustment Operation
- 11 Driving Methods Of Applications
- 12 Mechanical Specification
- 13 Installation Instruction
- 14 Installation Manual
- 15 Documents / Resources
  - 15.1 References

## Feature

- Universal AC input / Full range

- Protections: Short circuit / Overload / Over voltage
- Can be installed on DIN rail TS-35/7.5 or 15
- Output Voltage adjustable through internal potentiometer
- Output Current adjustable through external 1 ~1 0Vdc, PWM signal or resistance
- Cooling by free air convection
- Pass LPS
- LED indicator for power on
- 100% full load burn-in test
- 3 years warranty



## Applications

- Machine vision inspection system
- Plant cultivation system


## GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

## Description

DRA-60 is one 60W AC/DC DIN rail power supply, featuring the adjustable output current. Users are able to easily change the constant output current level, via 1 ~ 1 0Vdc, PWM signal or resistance. DRA-60 can be mounted on DIN rail TS-35/7.5 or 15; in addition, the width of the unit is only 40mm that it is well suited for the installation in a limited spacing. DRA-60 accepts the universal AC input between 90VAC and 264VAC; the efficiency is up to 87% that the entire series can operate, under free air convection, from -30°C through 70°C.

## Model Encoding

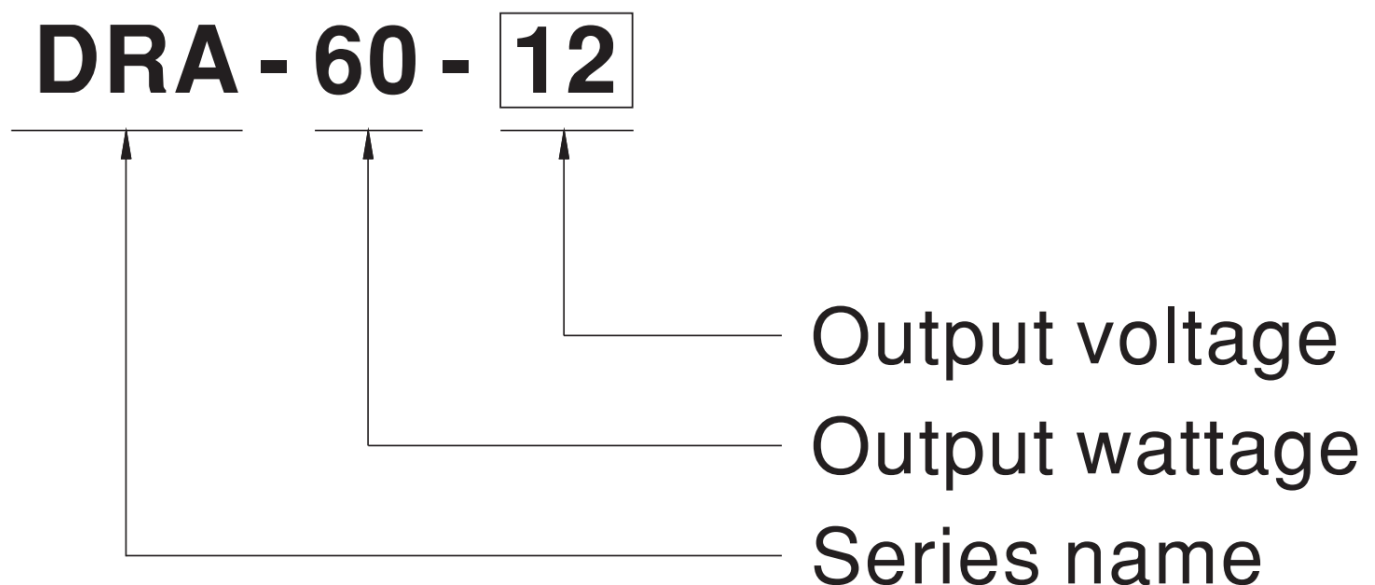

## SPECIFICATION

MODEL		DRA-60-12	DRA-60-24
OUTPUT	DC VOLTAGE	12V	24V
	CONSTANT CURRENT REGION	3 ~ 12V	3 ~ 24V
	RATED CURRENT	5A	2.5A
	CURRENT RANGE	0 ~ 5A	0 ~ 2.5A
	RATED POWER	60W	60W
	RIPPLE & NOISE (max.) Note.2	120mVp-p	150mVp-p
	VOLTAGE ADJ. RANGE	12 ~ 15V	24 ~ 30V
	VOLTAGE TOLERANCE Note.3	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%
	LOAD REGULATION	±0.5%	±0.5%
	SETUP, RISE TIME Note.4	400ms, 90ms/230VAC      800ms, 90ms/115VAC at full load	
	HOLD UP TIME (Typ.)	50ms/230VAC      10ms/115VAC at full load	
INPUT	VOLTAGE RANGE	90 ~ 264VAC      127 ~ 370VDC [DC input operation possible by connecting AC/L(+), AC/N(-)]	
	FREQUENCY RANGE	47 ~ 63Hz	
	EFFICIENCY (Typ.)	85%	87%
	AC CURRENT (Typ.)	1.3A/115VAC      0.8A/230VAC	


	<b>INRUSH CURRENT (Typ.)</b>	COLD START 30A/115VAC          60A/230VAC	
<b>PROTECTION</b>	<b>OVERLOAD</b>	95 ~ 108% rated output power	
		Protection type : Constant current limiting, recovers automatically after fault condition is removed	
	<b>OVER VOLTAGE</b>	14.49 ~ 18.63V	28.98 ~ 37.26V
		Protection type : Shut down o/p voltage, re-power on to recover	
<b>ENVIRONMENT</b>	<b>WORKING TEMP.</b>	-30 ~ +70°C (Refer to “Derating Curve”)	
	<b>WORKING HUMIDITY</b>	20 ~ 90% RH non-condensing	
	<b>STORAGE TEMP., HUMIDITY</b>	-40 ~ +85°C, 10 ~ 95% RH	
	<b>TEMP. COEFFICIENT</b>	±0.03%/°C (0 ~ 50°C) on output	
	<b>VIBRATION</b>	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes	
<b>SAFETY &amp; EMC (Note 5)</b>	<b>SAFETY STANDARDS</b>	UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004 approved	
	<b>WITHSTAND VOLTAGE</b>	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC	
	<b>ISOLATION RESISTANCE</b>	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C/ 70% RH	
	<b>EMC EMISSION</b>	Compliance to BS EN/EN55032 (CISPR32) Class B, BS EN/EN61000-3-2,-3, EAC TP TC 020	
	<b>EMC IMMUNITY</b>	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN55035, BS EN/EN61204-3, light industry level, criteria A, EAC TP TC 020	
<b>OTHERS</b>	<b>MTBF</b>	2930.8K hrs min.      Telcordia SR-332 (Bellcore) ; 436.4K hrs min.      MIL-HDBK-217F (25°C)	
	<b>DIMENSION</b>	40*90*100mm (W*H*D)	
	<b>PACKING</b>	0.3Kg; 42pcs/13.6Kg/0.82CUFT	

## NOTE

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μF & 47μF parallel capacitor.
3. Tolerance : includes set up tolerance, line regulation and load regulation.
4. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.
5. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on [https://www.meanwell.com//Upload/PDF/EMI\\_statement\\_en.pdf](https://www.meanwell.com//Upload/PDF/EMI_statement_en.pdf))
6. Installation clearances : 40mm on top, 20mm on the bottom, 5mm on the left and right side are recommended when loaded permanently with full power. In case the adjacent device is a heat source, 15mm clearance is recommended.
7. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).


Product Liability Disclaimer For detailed information, please refer to <https://www.meanwell.com/serviceDisclaimer.aspx>

## Block Diagram

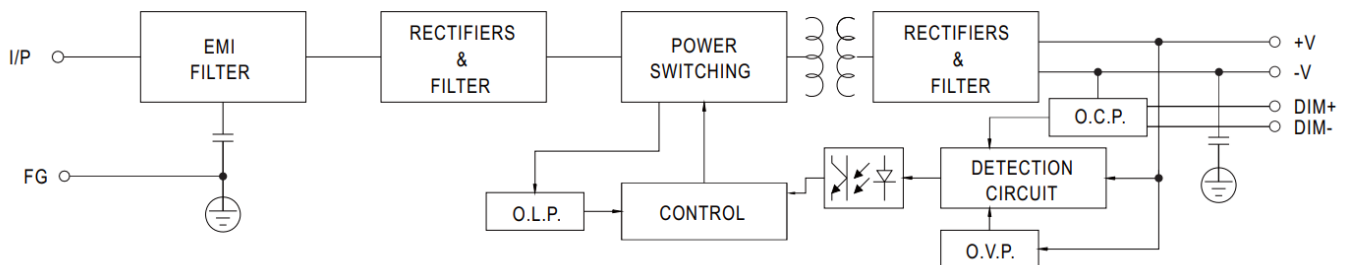


## Derating Curve

- AMBIENT TEMPERATURE (°C)

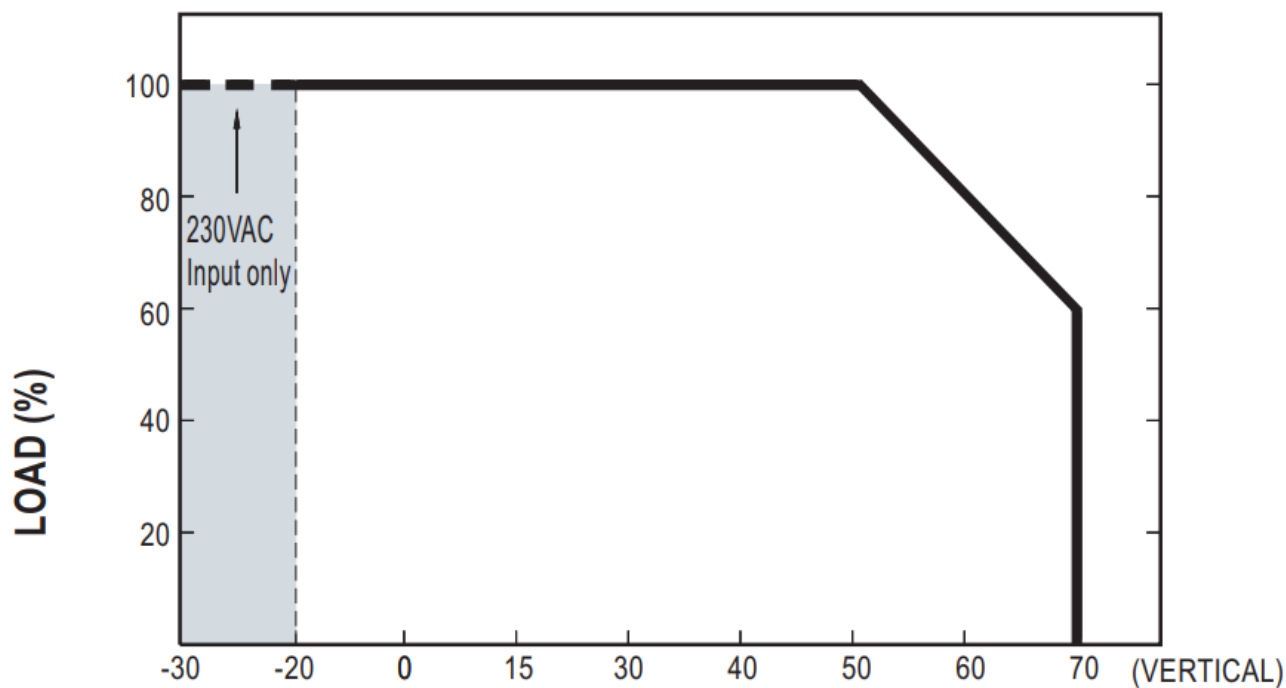

### Static Characteristics

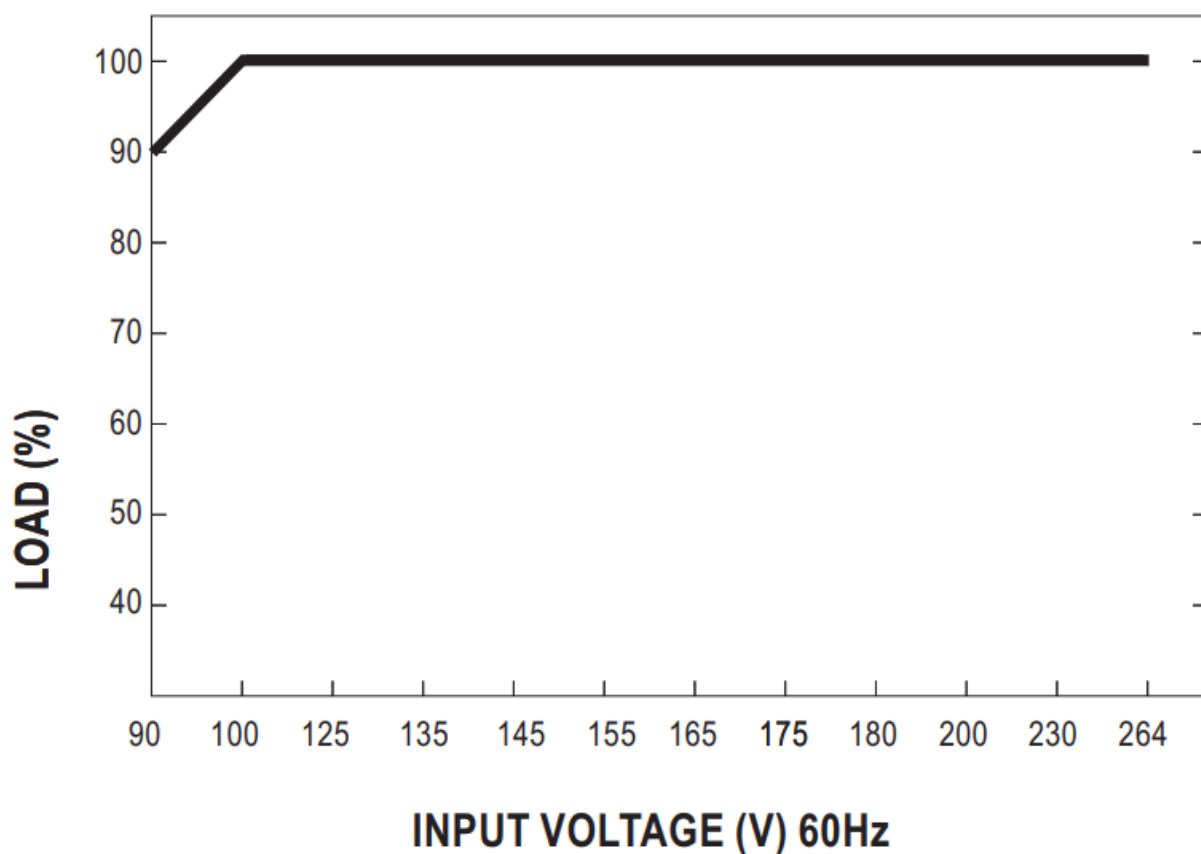

### Output Current Adjustment Operation

- Built-in 3 in 1 current adjustment function . Output constant current level can be adjusted by applying 1 ~ 10Vdc, 10V PWM signal or resistance between DIM+ and DIM-.
- Please DO NOT connect "DIM-" to "-V".

- Reference resistance value for output current adjustment (Typical)

Resistance value	Single Power supply	10K $\Omega$	20K $\Omega$	30K $\Omega$	40K $\Omega$	50K $\Omega$	60K $\Omega$	70K $\Omega$	80K $\Omega$	90K $\Omega$	100 K $\Omega$	OPEN
	Multiple Power supplies (N=Power supply quantity for simultaneous current adjustment control)	10K $\Omega/N$	20K $\Omega/N$	30K $\Omega/N$	40K $\Omega/N$	50K $\Omega/N$	60K $\Omega/N$	70K $\Omega/N$	80K $\Omega/N$	90K $\Omega/N$	100 K $\Omega/N$	—
Percentage of rated current		10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %	

1 ~ 10Vdc for output current adjustment (Typical)


Applied Source	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %	102%~108%

10V PWM signal for output current adjustment (Typical): Frequency range :100Hz ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %	102%~108%


Using the current adjustment function can not adjust the output current to 0A. Please refer to the connection method below to adjust the output current to 0A.



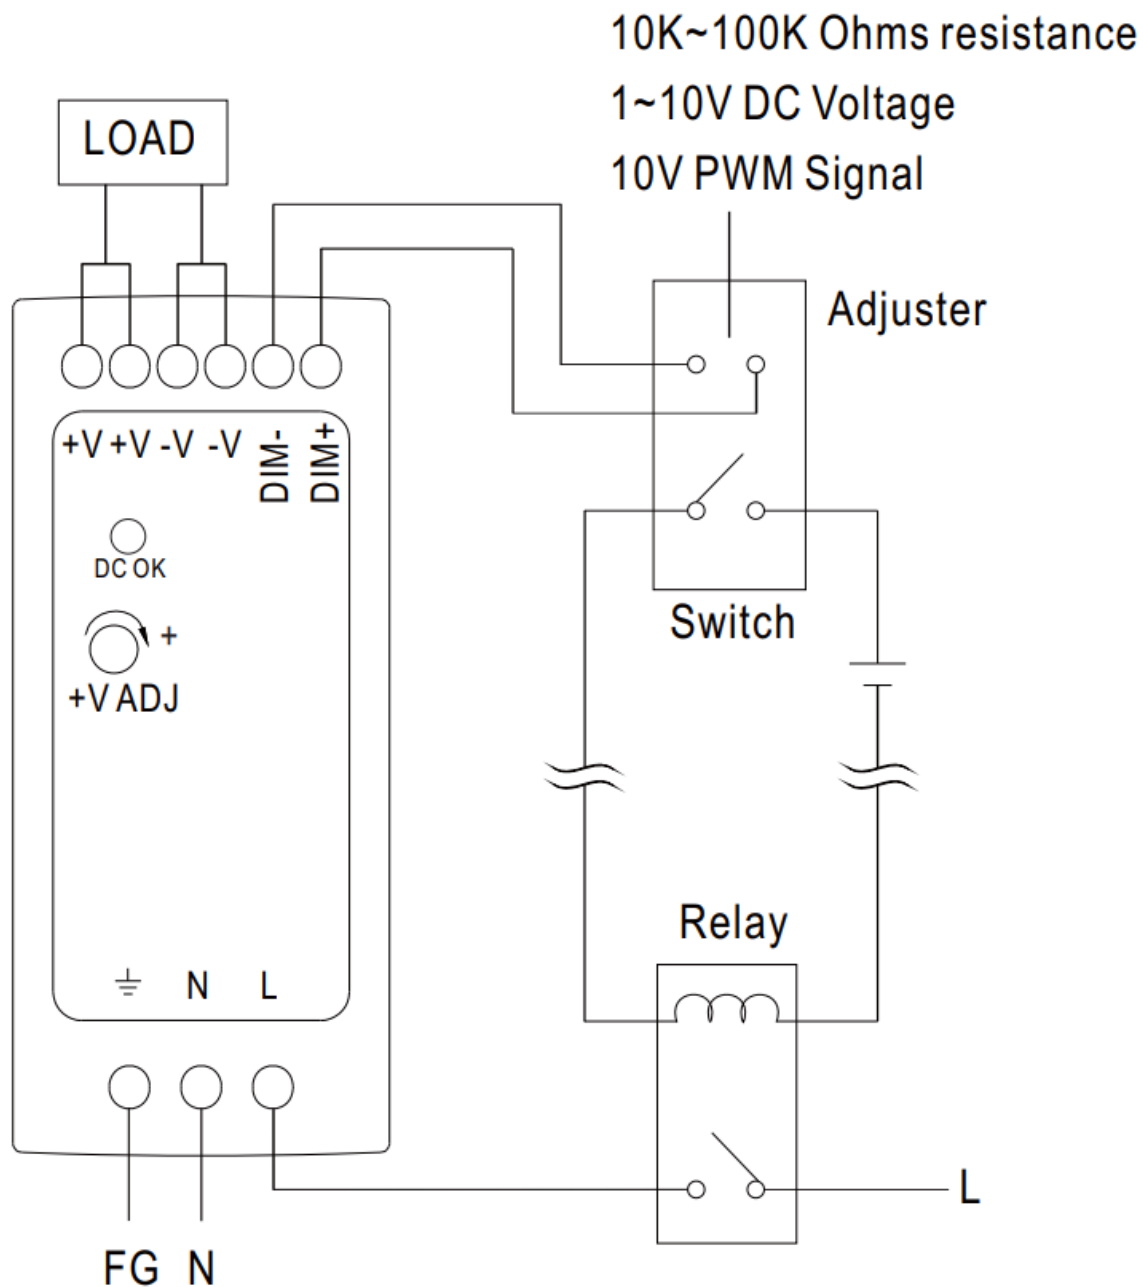


## Driving Methods Of Applications

The power supply may either work in “constant voltage mode or constant current mode”

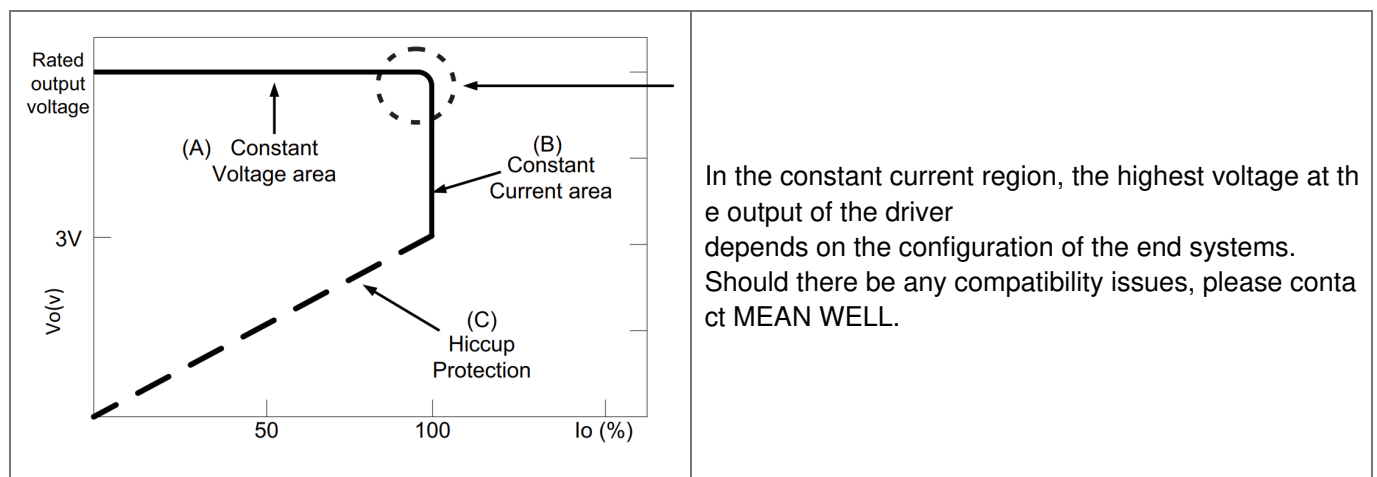


## Mechanical Specification

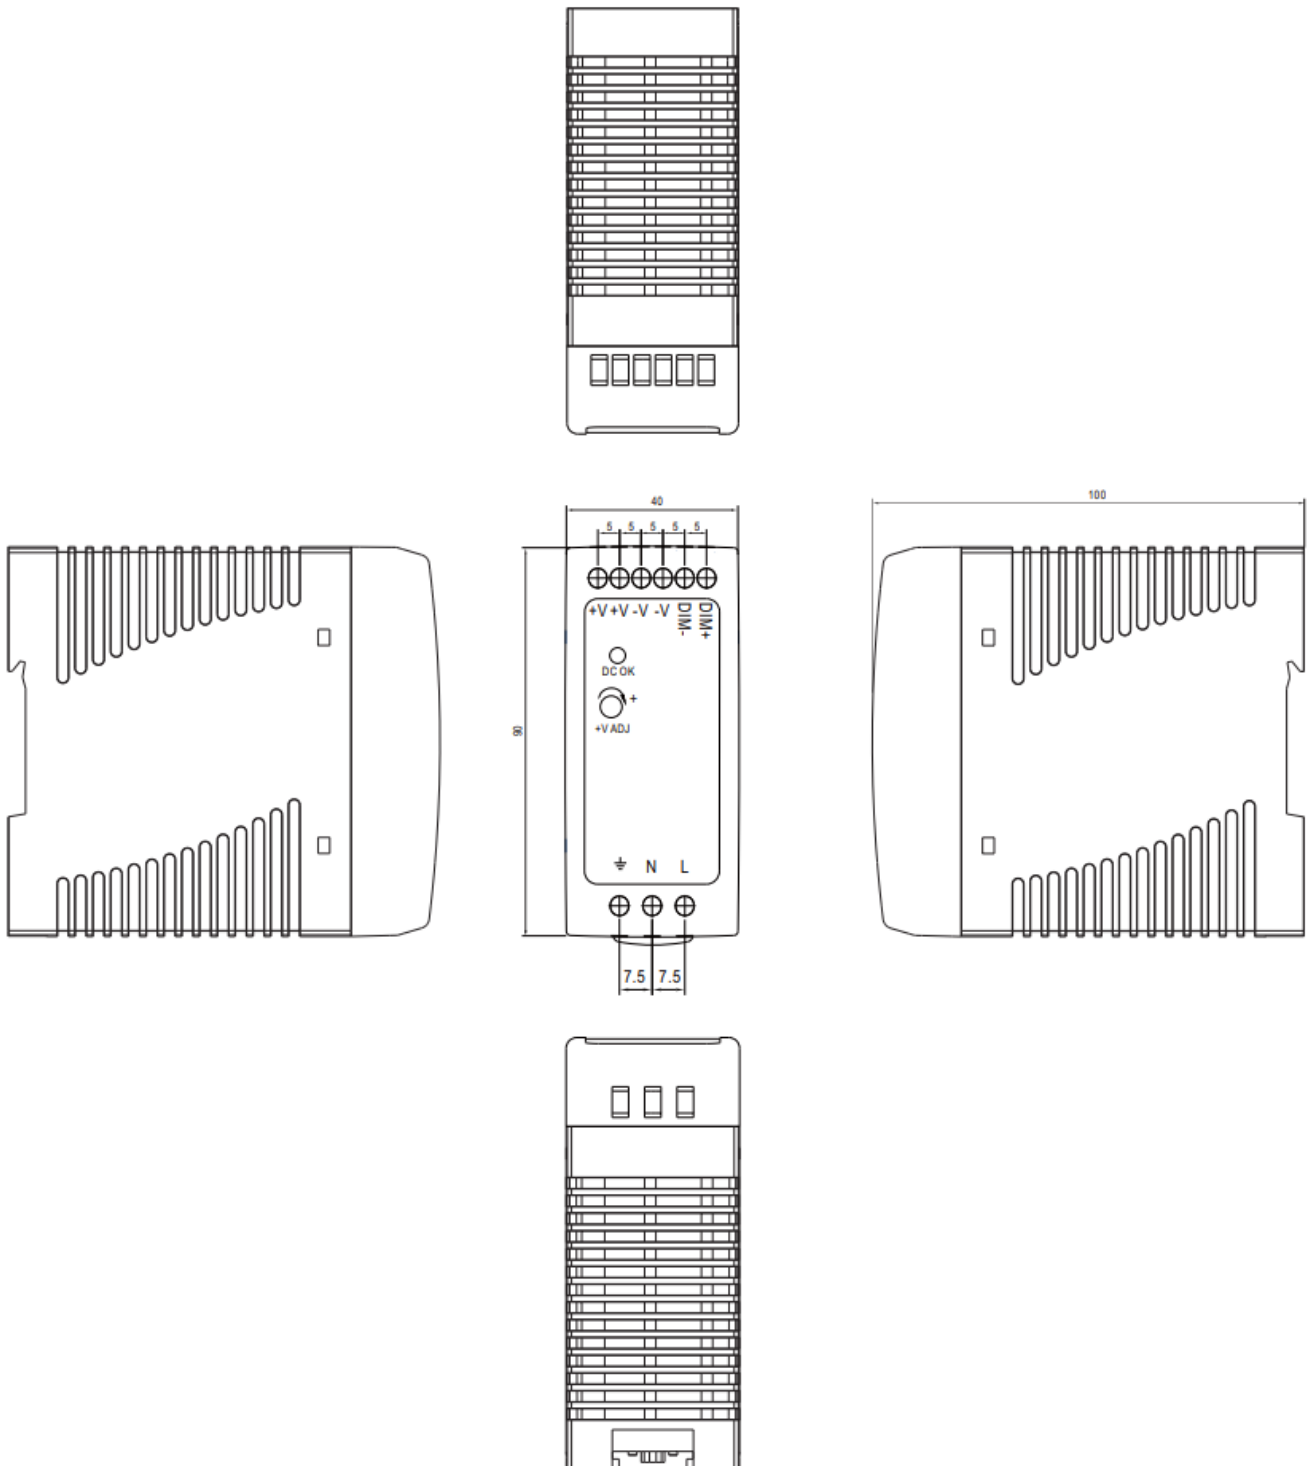

## Installation Instruction

- Back View

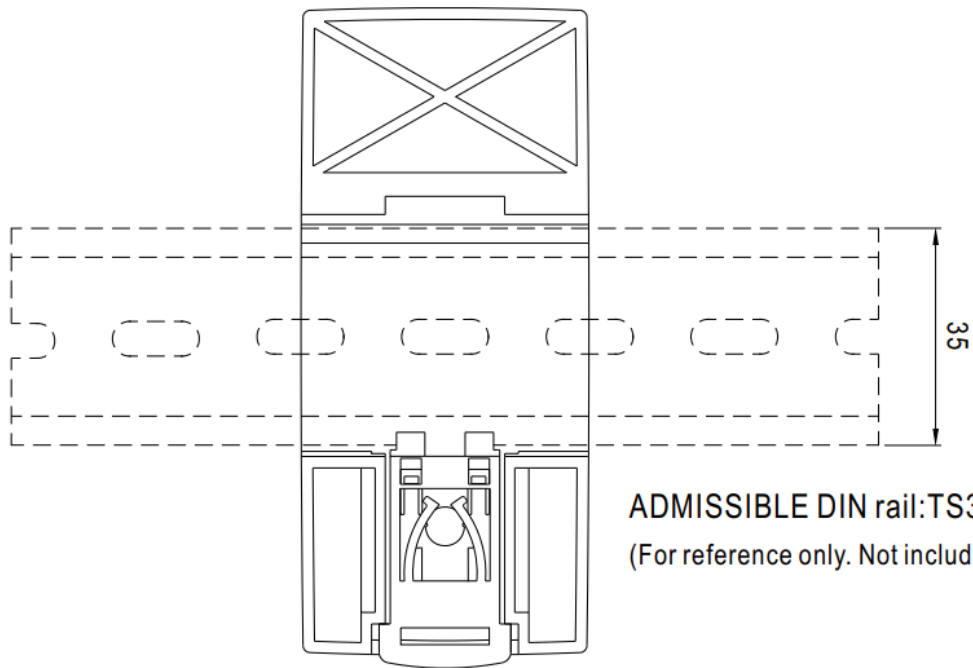

ADMISSIBLE DIN rail: TS35/7.5 OR TS35/15  
(For reference only. Not included with unit.)

This series fits DIN rail TS35/7.5 or TS35/15. For installation details, please refer to the Instruction manual.

## Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>

User's Manual





[MEAN WELL DRA-60-12 Single Output Switching Power Supply](#) [pdf] Instruction Manual  
DRA-60-12 Single Output Switching Power Supply, DRA-60-12, Single Output Switching Power Supply, Output Switching Power Supply, Switching Power Supply, Power Supply, Supply

References

- [△ TÜV Rheinland - Home | US | TÜV Rheinland](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.