




# MEAN WELL NPF-120D-12 120W Single Output LED Driver Owner's Manual

[Home](#) » [MEAN WELL](#) » MEAN WELL NPF-120D-12 120W Single Output LED Driver Owner's Manual 

## Contents

- 1 MEAN WELL NPF-120D-12 120W Single Output LED Driver
- 2 Features
- 3 Applications
- 4 GTIN CODE
- 5 Description
- 6 Model Encoding
- 7 SPECIFICATION
- 8 BLOCK DIAGRAM
- 9 DRIVING METHODS OF LED MODULE
- 10 DIMMING OPERATION
- 11 OUTPUT LOAD vs TEMPERATURE
- 12 LIFE TIME
- 13 MECHANICAL SPECIFICATION
- 14 INSTALLATION MANUAL
- 15 Specifications:
- 16 Product Usage Instructions:
  - 16.1 Installation:
  - 16.2 Operation:
  - 16.3 Maintenance:
    - 16.3.1 FAQ:
      - 16.3.1.1 Q: What should I do if the LED driver is not working?
      - 16.3.1.2 Q: Can the LED driver be used with other types of lighting systems?
  - 16.4 Documents / Resources
    - 16.4.1 References
  - 16.5 Related Posts

**MEAN WELL NPF-120D-12 120W Single Output LED Driver**



## OWNER'S MANUAL



## Features

- Plastic housing with class II design
- Built-in active PFC function
- Standby power consumption <0.5W
- IP67 rating for indoor or outdoor installations
- Function options: 3 in 1 dimming (dim-to-off); Auxiliary DC output
- Typical lifetime >50000hours
- 5 years warranty

## Applications

- LED panel lighting
- LED downlight
- LED decorative lighting
- Moving sign
- Type “HL” for use in Class I, Division 2 hazardous (Classified) location


## GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

## Description

NPF-120D series is a 120W AC/DC LED driver featuring the constant current mode output. NPF-120D operates from 90~305VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 90%, with the fanless design, the entire series is able to operate for -40 C~+90 C case temperature under free air convection. The entire series is rated with IP67 ingress protection level and is suitable to work for a variety of applications at dry, damp or wet locations. NPF-120D is equipped with the 3 in 1 dimming function so as to provide the design flexibility for LED lighting system.

## Model Encoding

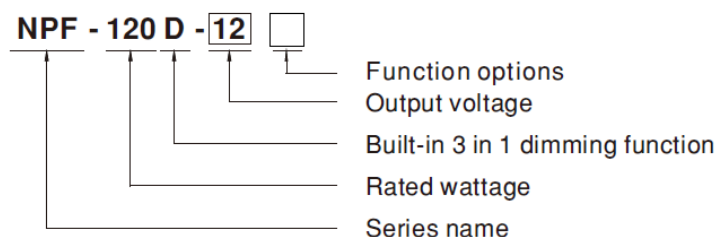


Type	IP Level	Function	Note
Blank	IP67	3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock
BE	IP67	3 in 1 dimming function and Auxiliary DC output	By request

## SPECIFICATION


MODEL		NPF-120D-12	NPF-120D-15	NPF-120D-20	NPF-120D-24	NPF-120D-30	NPF-120D-36	NPF-120D-42	NPF-120D-48	NPF-120D-54	
OUTPUT	RATED CURRENT	10A	8A	6A	5A	4A	3.4A	2.9A	2.5A	2.3A	
	RATED POWER	120W	120W	120W	120W	120W	122.4W	121.8W	120W	124.2W	
	CONSTANT CURRENT REGION	7.2 ~ 12V	9 ~ 15V	12 ~ 20V	14.4 ~ 24V	18 ~ 30V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54V	
	CURRENT RIPPLE	5.0% max. @rated current									
	CURRENT TOLERANCE	±5.0%									
	AUXILIARY DC OUTPUT Note.4	Nominal 12V(deviation 11.4~12.6V)@0.2A for BE-Type only									
	SET UP TIME Note.3	500ms/115VAC, 230VAC									
INPUT	VOLTAGE RANGE Note.2		90 ~ 305VAC      127 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)								
	FREQUENCY RANGE		47 ~ 63Hz								
	POWER FACTOR (Typ.)		PF ≥ 0.97/115VAC, PF ≥ 0.96/230VAC, PF ≥ 0.94/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)								
	TOTAL HARMONIC DISTORTION		THD< 20%(@load≥60%/115VC, 230VAC; @load≥75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)								
	EFFICIENCY (Typ.)	BLANK-TYPE	88.5%	88.5%	89%	89.5%	89%	89.5%	89.5%	90%	90%
		BE-TYPE(Note.5)	87.5%	87.5%	88.5%	89%	88.5%	89%	89%	89%	89%
	AC CURRENT (Typ.)		1.3A / 115VAC		0.65A / 230VAC		0.55A / 277VAC				
	INRUSH CURRENT(Typ.)		COLD START60A(twidth=520μs measured at 50% Ipeak) at 230VAC; Per NEMA 410								
	MAX. NO. of PSUs on 16A CIRCUIT BREAKER		4 units (circuit breaker of type B) / 6 units (circuit breaker of type C) at 230VAC								
	LEAKAGE CURRENT		<0.25mA / 277VAC								
	STANDBY POWER CONSUMPTION		<0.5W								
PROTECTION	OVER CURRENT		95 ~ 108% Constant current limiting, recovers automatically after fault condition is removed								
	SHORT CIRCUIT		Hiccup mode, recovers automatically after fault condition is removed								
	OVER VOLTAGE		15 ~ 17V	17.5 ~ 21V	23 ~ 27V	28 ~ 34V	34 ~ 40V	41 ~ 46V	46 ~ 54V	54 ~ 60V	59 ~ 66V
			Shut down o/p voltage, re-power on to recover								
	OVER TEMPERATURE		Shut down o/p voltage, re-power on to recover								
ENVIRONMENT	WORKING TEMP.		Tcase=-40 ~ +90℃ (Please refer to " OUTPUT LOAD vs TEMPERATURE" section)								
	MAX. CASE TEMP.		Tcase=+90℃								
	WORKING HUMIDITY		20 ~ 95% RH non-condensing								
	STORAGE TEMP., HUMIDITY		-40 ~ +80℃, 10 ~ 95% RH								
	TEMP. COEFFICIENT		±0.03%/℃ (0 ~ 40℃)								
	VIBRATION		10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes								
SAFETY & EMC	SAFETY STANDARDS		UL8750(type"HL"), CSA C22.2 No. 250.13-12, ENEC BS EN/EN61347-1, BS EN/EN61347-2-13, BS EN/EN62384 independent,EAC TP TC 004, GB19510.1,GB19510.14,IP67 approved; Design refer to BS EN/EN60335-1								
	WITHSTAND VOLTAGE		I/P-O/P:3.75KVAC								
	ISOLATION RESISTANCE		I/P-O/P:100M Ohms / 500VDC / 25℃/ 70% RH								
	EMC EMISSION		Compliance to BS EN/EN55015, BS EN/EN61000-3-2 Class C (@ load ≥ 60%) ; BS EN/EN61000-3-3;GB17743 and GB17625.1, EAC TP TC 020								
	EMC IMMUNITY		Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11; BS EN/EN61547, light industry level(surge immunity Line-Line 2KV);EAC TP TC 020								
OTHERS	MTBF		2632.6K hrs min.      Telcordia SR-332 (Bellcore) ; 233.9K hrs min.      MIL-HDBK-217F (25℃)								
	DIMENSION		191*63*37.5mm (L*W*H)								
	PACKING		0.97Kg; 15pcs/15.6Kg/0.87CUFT								
NOTE	<div>1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25℃ of ambient temperature.</div> <div>2. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.</div> <div>3. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.</div> <div>4. The Auxiliary DC output is defined between AUX+ and DIM-.</div> <div>5. The efficiency for BE-Type is measured when the Auxiliary DC output is 100% loaded at 12V, 0.2A.</div> <div>6. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-quality EMC Directive on the complete installation again.</div> <div>7. This series meets the typical life expectancy of &gt;50,000 hours of operation when Tcase, particularly (Tc) point (or TMP, per DLC), is about 75℃ or less.</div> <div>8. Please refer to the warranty statement on MEAN WELL's website at <a href="http://www.meanwell.com">http://www.meanwell.com</a></div> <div>9. The ambient temperature derating of 3.5℃/1000m with fanless models and of 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft).</div> <div>10. For any application note and IP water proof function installation caution, please refer our user manual before using. <a href="https://www.meanwell.com/Upload/PDF/LED_EN.pdf">https://www.meanwell.com/Upload/PDF/LED_EN.pdf</a></div> <div>11. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently connected to the mains.</div> <div>12. BE-type is used for any light source that exempt from the ErP-Directive (EU) 2019/2020 requirement, for example this model could be use for signalling products(including, but not limited to road-, railway-, marineorair traffic-signalling , traffic control or airfield lamps) .</div> <div>※ Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a></div>										

## BLOCK DIAGRAM

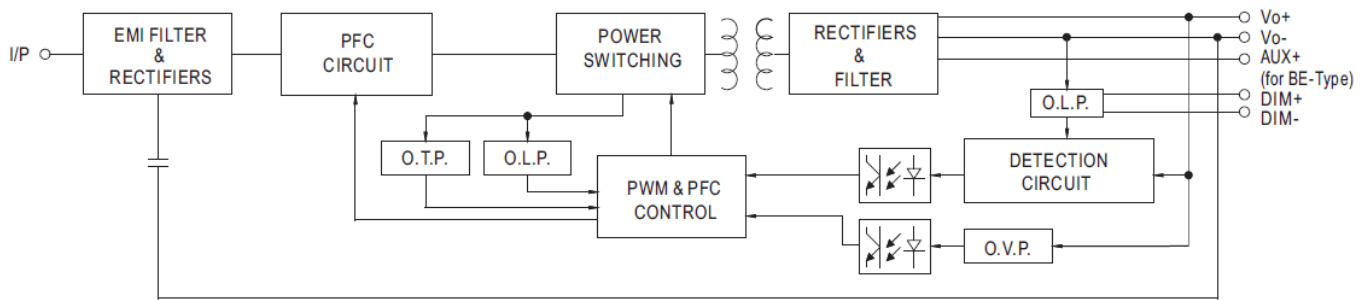

## DRIVING METHODS OF LED MODULE

※ This series works in constant current mode to directly drive the LEDs.

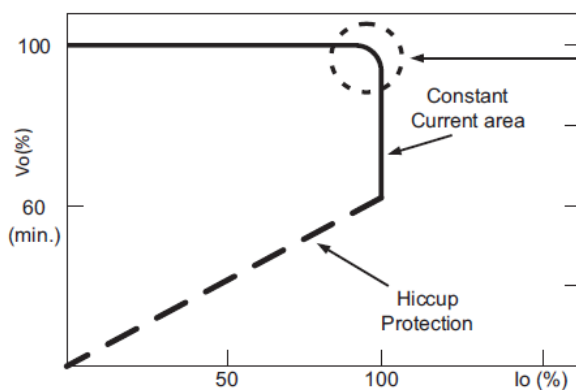


Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.

## DIMMING OPERATION


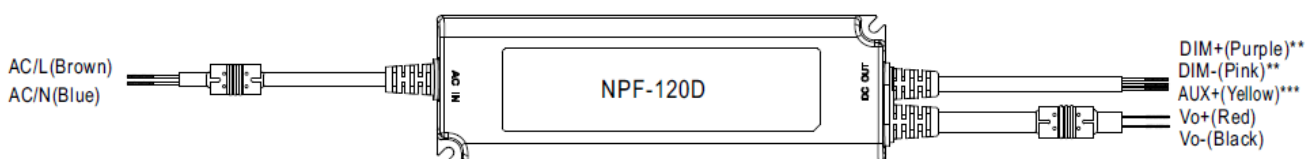


### ※ 3 in 1 dimming function



- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 0 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100μA (typ.)

◎ Applying additive 0 ~ 10VDC



## ○ Applying additive voltage

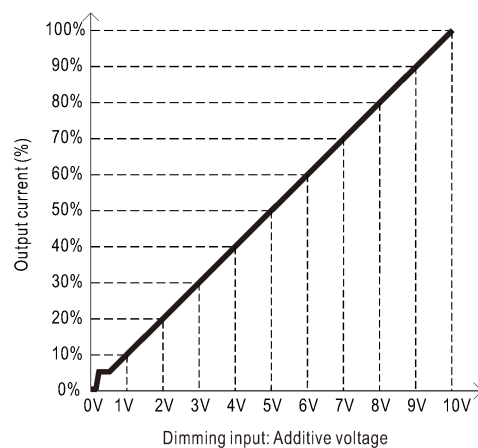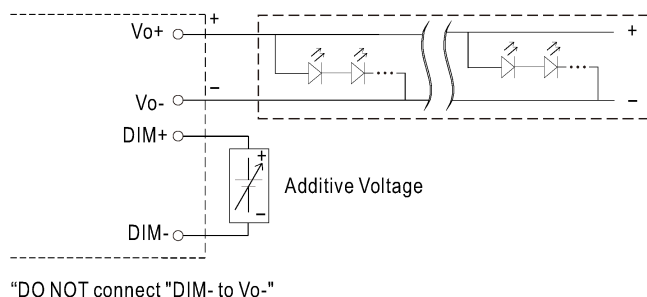

## ◎ Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

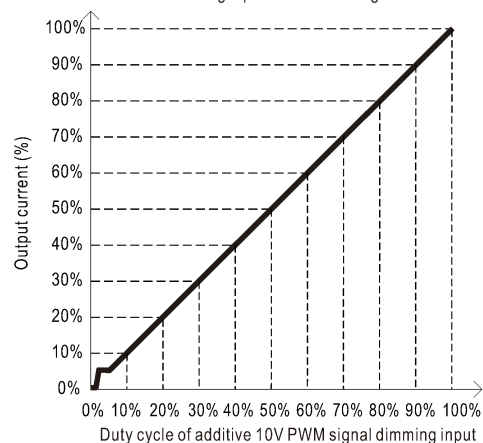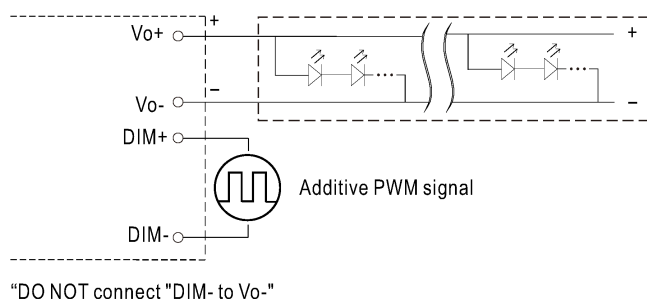

## ◎ Applying additive resistance:

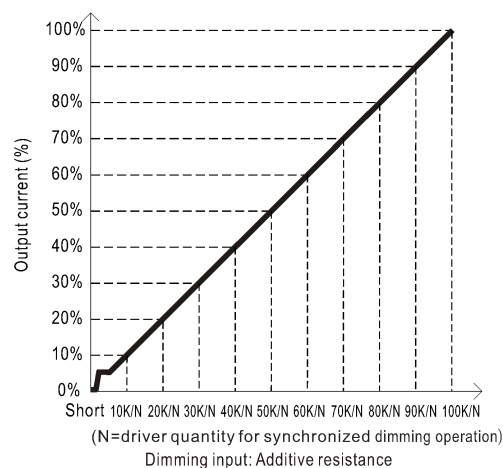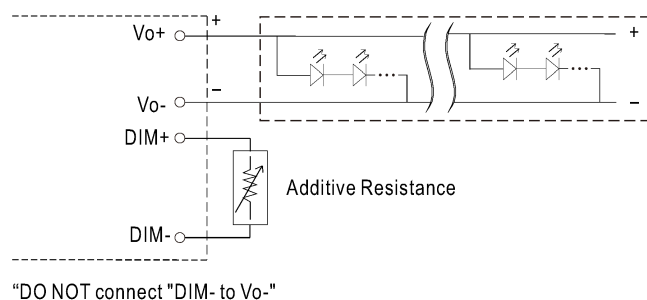



Note : 1. Min. dimming level is about 6% and the output current is not defined when  $0\% < I_{out} < 6\%$ .

2. The output current could drop down to 0% when dimming input is about 0kΩ or 0Vdc, or 10V PWM signal with 0% duty cycle.


※ Auxiliary DC operation (for BE-type)

· AUX+, with mark \*\*\*, is added for BE-Type, used as the Auxiliary DC output with respect to DIM-.

## OUTPUT LOAD vs TEMPERATURE

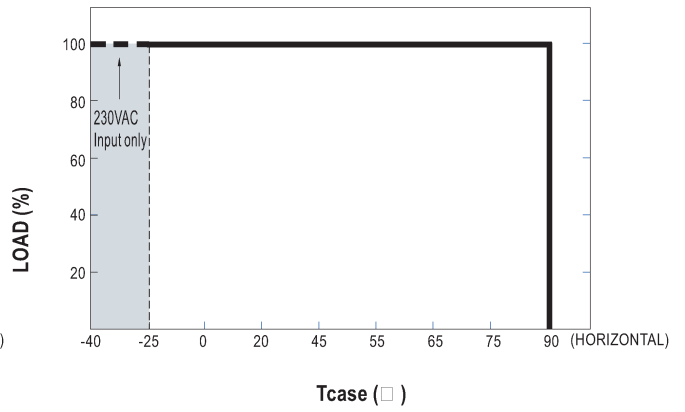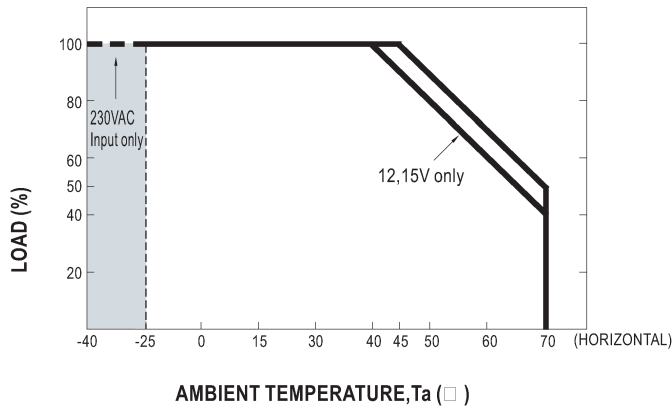


### ■ STATIC CHARACTERISTIC

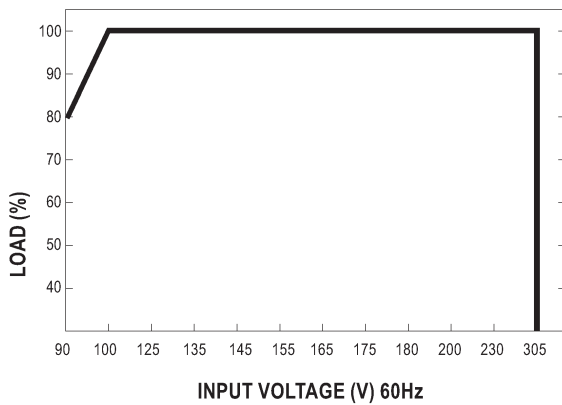

※ De-rating is needed under low input voltage.


### ■ POWER FACTOR (PF) CHARACTERISTIC

※  $T_{case}$  at 80°C

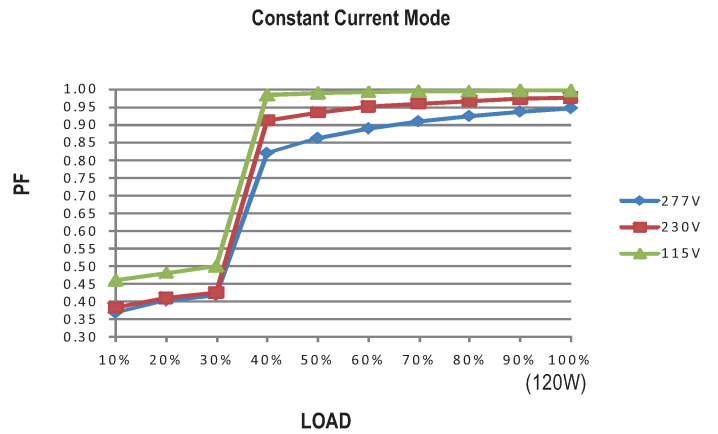

### ■ TOTAL HARMONIC DISTORTION (THD)


※ 48V Blank-Type Model,  $T_{case}$  at 80°C

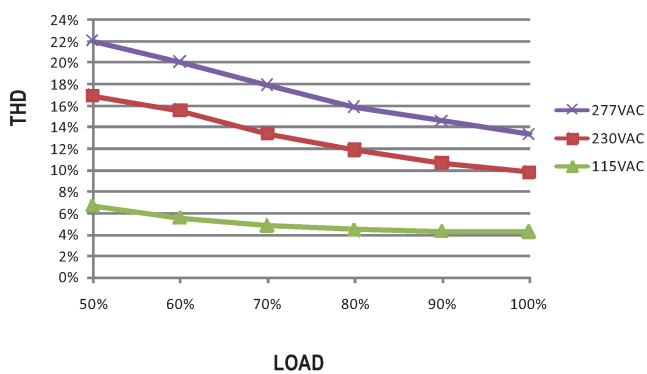


### ■ EFFICIENCY vs LOAD

NPF-120D series possess superior working efficiency that up to 90% can be reached in field applications.

※ 48V Blank-Type Model,  $T_{case}$  at 80°C

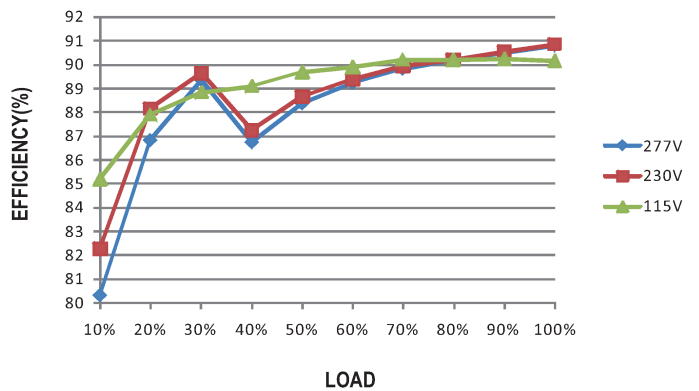


## LIFE TIME

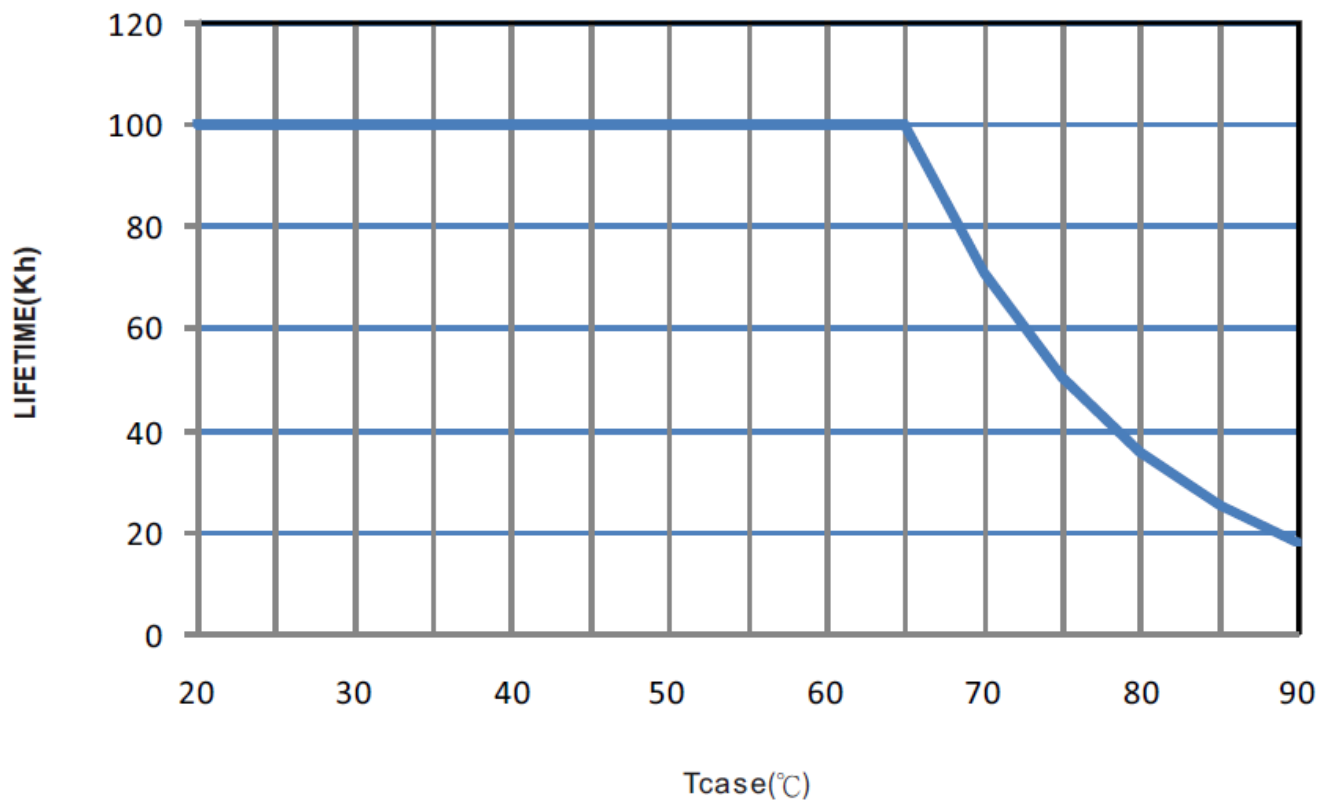


## MECHANICAL SPECIFICATION

※ Blank-Type

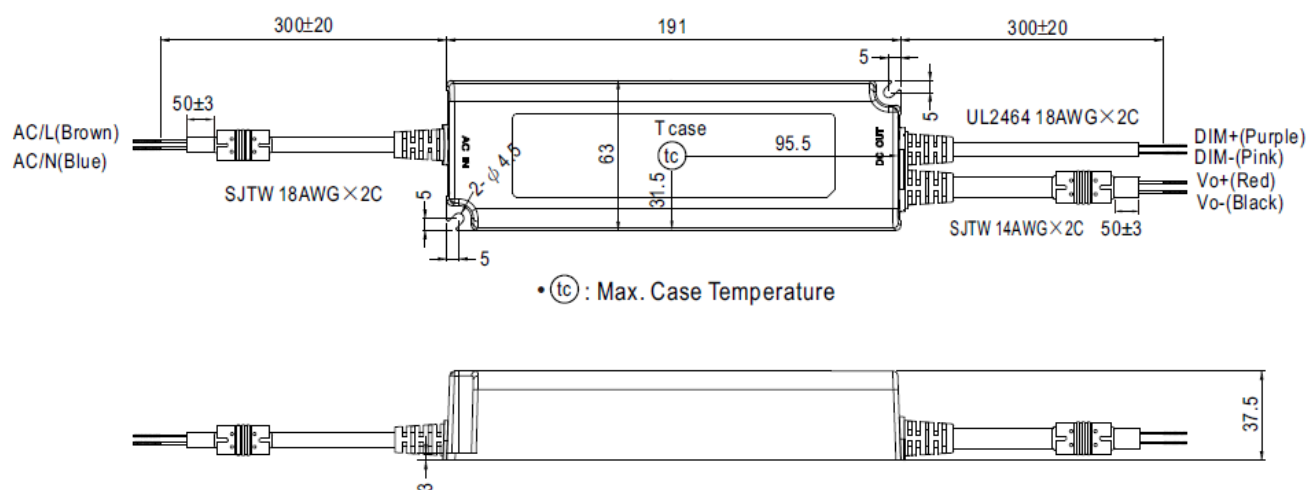


※ BE-Type



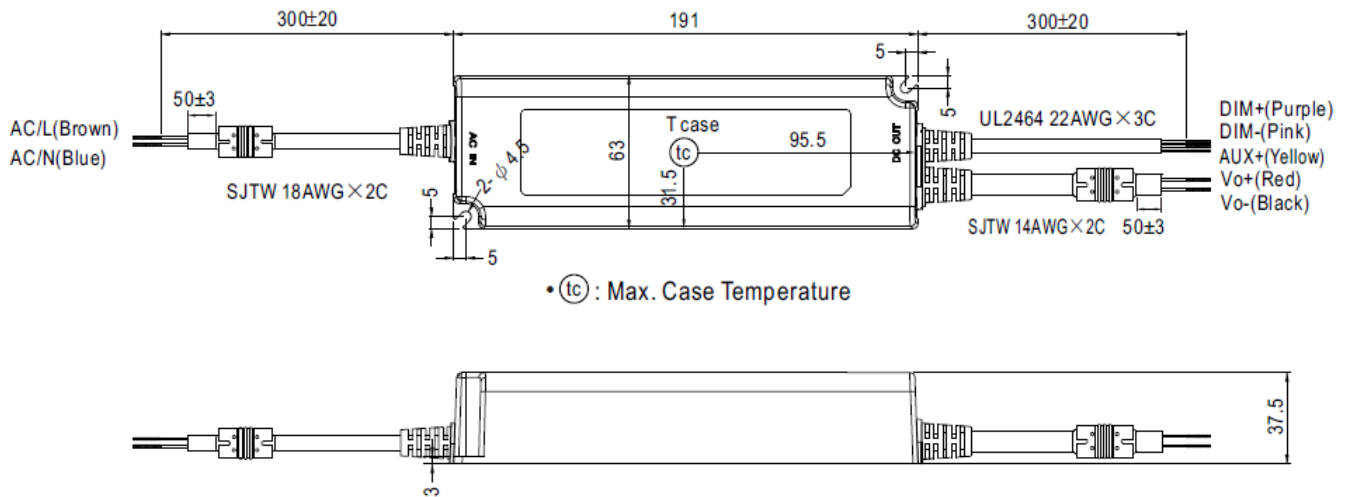

### Recommend Mounting Direction

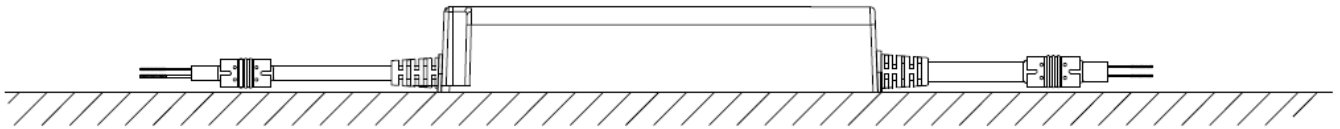

## INSTALLATION MANUAL

Please refer to: <http://www.meanwell.com/manual.html>

### Specifications:

- Model: NPF-120D series
- Rated Power: 120W
- Output:
  - Constant Current Region: 7.2 ~ 12V, 9 ~ 15V, 12 ~ 20V, 14.4 ~ 24V, 18 ~ 30V
  - Current Ripple: 5.0% max. @rated current
  - Auxiliary DC Output: Nominal 12V (deviation 11.4~12.6V) @0.2A for BE-Type only
- Voltage Range: 90 ~ 305VAC, 127 ~ 431VDC
- Frequency Range: 47 ~ 63Hz
- Power Factor: PF0.97/115VAC, PF0.96/230VAC, PF0.94/277VAC@full load
- Total Harmonic Distortion: THD<20%
- Efficiency:
  - Blank-Type: 88.5% – 90% (Typ.)
  - BE-Type: 87.5% – 89% (Typ.)
- AC Current (Typ.): 1.3A / 115VAC, 0.65A / 230VAC, 0.55A / 277VAC

### Product Usage Instructions:

## Installation:

1. Ensure the input voltage is within the specified range.
2. Connect the LED driver to the LED lighting system following the correct polarity.
3. Secure all connections and ensure proper grounding.

## Operation:

1. Apply power to the LED driver within the specified voltage and frequency range.
2. Monitor the LED driver's operation and adjust as necessary.

## Maintenance:

1. Regularly check for any loose connections or signs of damage.
2. Clean the LED driver and surrounding area to prevent dust buildup.

---

## FAQ:


### Q: What should I do if the LED driver is not working?

A: Check the input power source, connections, and ensure proper grounding. If issues persist, consult a professional for further assistance.

### Q: Can the LED driver be used with other types of lighting systems?

A: The LED driver is specifically designed for LED lighting systems and may not be compatible with other types of lighting technologies.

## Documents / Resources

	<p><b><a href="#">MEAN WELL NPF-120D-12 120W Single Output LED Driver</a></b> [pdf] Owner's Manual NPF-120D-12, NPF-120D-15, NPF-120D-20, NPF-120D-24, NPF-120D-30, NPF-120D-36, NPF-120D-42, NPF-120D-48, NPF-120D-54, NPF-120D-12 120W Single Output LED Driver, NPF-120D-12, 120W Single Output LED Driver, Output LED Driver, LED Driver</p>
---	--

## References

- [User Manual](#)