



MEAN WELL
NSP-1600 Series
1600W Power
Supply with Single
Output



MEAN WELL NSP-1600 Series 1600W Power Supply with Single Output Owner's Manual

[Home](#) » [MEAN WELL](#) » MEAN WELL NSP-1600 Series 1600W Power Supply with Single Output Owner's Manual



Contents

- [1 MEAN WELL NSP-1600 Series 1600W Power Supply with Single Output](#)
- [2 Product Usage Instructions](#)
- [3 Features](#)
- [4 Description](#)
- [5 SPECIFICATION](#)
- [6 Block Diagram](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)



MEAN WELL NSP-1600 Series 1600W Power Supply with Single Output



Specifications

- Model: NSP-1600 series
- Power Output: 1600W
- Output Voltage Options: 12V, 24V, 36V, 48V
- Dimensions: 300 * 85 * 41 mm (11.8 * 3.35 * 1.61 inch)
- Input Voltage Range: 90-264VAC
- Efficiency: Up to 92.5%
- Protections: Short Circuit, Overload, Over Voltage, Over Temperature
- Warranty: 5 years

Product Usage Instructions

1. Installation

1. Ensure the power supply is disconnected from the mains.
2. Mount the power supply securely in a well-ventilated area.
3. Connect the AC input and DC output cables as per the provided specifications.
4. Check all connections before powering on the unit.

2. Powering On/Off

To power on the unit, connect it to the mains power supply and switch on the power using the remote ON-OFF control or the front panel switch. To power off, simply reverse this process.

3. Remote Sensing

If required, connect the remote sensing wires to ensure accurate voltage regulation at the load end.

4. Troubleshooting

If the power supply encounters issues such as overloading or overheating, refer to the user manual for detailed troubleshooting steps. Contact customer support if problems persist.

Frequently Asked Questions (FAQ)

- **Q: What is the warranty period for the NSP-1600 series power supply?**

A: The NSP-1600 series power supply comes with a 5-year warranty from the date of purchase.

• **Q: Can the output voltage be adjusted on the NSP-1600 power supply?**

A: Yes, the output voltage level is programmable within specified ranges for different models.

• **Q: What are some common applications of the NSP-1600 power supply?**

A: The NSP-1600 power supply is commonly used in factory control systems, test and measurement instruments, laser machines, aging facilities, digital broadcasting, and constant current sources.

1600W Power Supply with Single Output

Dimension

L	*	W	*	H	
300	*	85	*	41 (1U)	mm
11.8	*	3.35	*	1.61 (1U)	inch

Front



User's Manual



Back



Features

- Universal AC input / Full range
- Built-in active PFC function

- High efficiency up to 92.5%
- Forced air cooling by built-in DC fan
- Output voltage level programmable
- Built-in remote ON-OFF control / remote sense / auxiliary power / DC OK signal / OTP alarm signal
- Built-in intelligent fan speed control
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Design refer to SEMI F47 at 200VAC
- 5 years warranty

Applications

- Factory control or automation apparatus
- Test and measurement instrument
- Laser related machine
- Aging facility
- Digital broadcasting
- Constant current source


GTIN CODE

- MW Search:
 - <https://www.meanwell.com/serviceGTIN.aspx>

Description

- NSP-1600 is a 1.6KW single output enclosed type AC/DC power supply with a 1U low profile and a high power density up to 25W/inch'. This series operates for 90~264VAC input voltage and offers the models with the DC output mostly demanded from the industry. Each model is cooled by the thermostatically controlled fan. Moreover, NSP-1600 provides vast design flexibility by equipping various built-in functions such as the output programming, remote ON-OFF control, auxiliary power, etc.

Model Encoding / Order Information

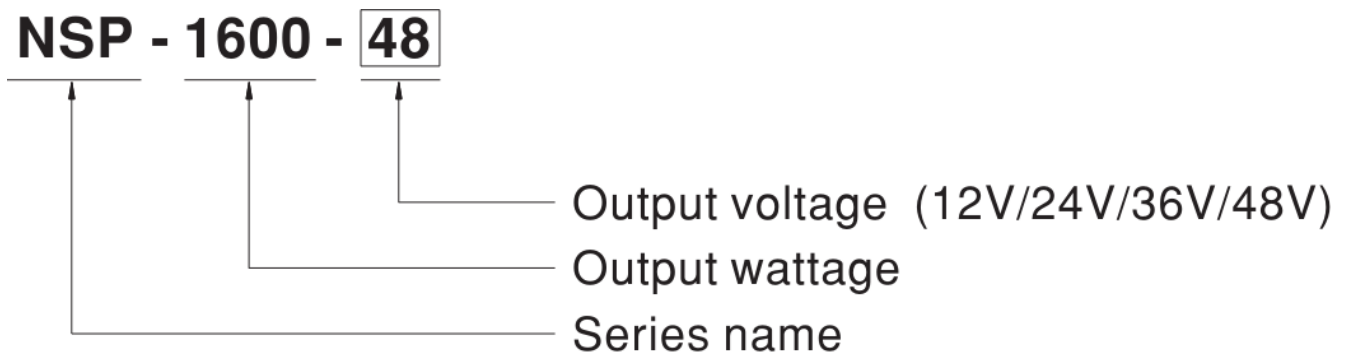

SPECIFICATION

MODEL	NSP-1600-12	NSP-1600-24	NSP-1600-36	NSP-1600-48
-------	-------------	-------------	-------------	-------------


OUT PUT	DC VOLTAGE	12V	24V	36V	48V
	RATED CUR RENT	125A	67A	44.5A	33.5A
	CURRENT R ANGE	0 ~ 125A	0 ~ 67A	0 ~ 44.5A	0 ~ 33.5A
	RATED POW ER	1500W	1608W	1602W	1608W
	RIPPLE & NO ISE (max.) Note.2	150mVp-p	200mVp-p	250mVp-p	300mVp-p
	VOLTAGE AD J. RANGE	11.5 ~ 15V	23.5 ~ 30V	35.5 ~ 45V	47.5 ~ 58.8V
	VOLTAGE TO LERANCE N ote.3	±1.0%	±1.0%	±1.0%	±1.0%
	LINE REGUL ATION	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGUL ATION	±0.5%	±0.5%	±0.5%	±0.5%
	SETUP, RISE TIME	1500ms, 60ms/230VAC at full load			
	HOLD UP TI ME (Typ.)	16ms / 230VAC at 70% load 10ms / 230VAC at full load			
INP UT	VOLTAGE RA NGE Note.4	90 ~ 264VAC 250 ~ 400VDC			
	FREQUENCY RANGE	47 ~ 63Hz			
	POWER FAC TOR (Typ.)	0.97/230VAC at full load			
	EFFICIENCY (Typ.)	89%	91%	91.5%	92.5%
	AC CURREN T (Typ.) Note.4	14A/115VAC 8A/230VAC	15A/115VAC	8.5A/230VAC	
	INRUSH CUR RENT (Typ.)	COLD START 35A/230VAC			
	LEAKAGE C URRENT	<2mA / 230VAC			
	OVERLOAD	105 ~ 115% rated output power			
		Protection type : Constant current limiting, unit will shut down o/p voltage after 5 sec. After O/P voltage falls, re-power on to recover			

PRO TEC TION	OVER VOLTA GE	15.75 ~ 18.75 V	31.5 ~ 37.5V	47.2 ~ 56.3V	63 ~ 75V
		Protection type : Shut down o/p voltage, re-power on to recover			
	OVER TEMP ERATURE	Protection type : Shut down o/p voltage, recovers automatically after temperature goes down			
FUN CTI ON	OUTPUT VO LTAGE PROG RAMMABLE(PV)	Adjustment of output voltage is allowable to 40 ~ 125% of nominal output voltage (60 ~ 125% for 12V). Please refer to the Function Manual.			
	AUXILIARY P OWER	12V @ 0.8A			
	REMOTE ON- OFF CONTR OL	By electrical signal or dry contact Power ON:short Power OFF:open. Please refer to the Function Manual			
	REMOTE SE NSE	Compensate voltage drop on the load wiring up to 0.5V. Please refer to the Function Manual			
	ALARM SIGN AL	Isolated signal output for T-alarm and DC OK			
ENV IRO NM ENT	WORKING T EMP.	-20 ~ +70°C (Refer to “Derating Curve”)			
	WORKING H UMIDITY	20 ~ 90% RH non-condensing			
	STORAGE T EMP., HUMID ITY	-40 ~ +85°C, 10 ~ 95% RH non-condensing			
	TEMP. COEF FICIENT	±0.03%/°C (0 ~ 50°C)			
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes			
	SAFETY STA NDARDS	UL62368-1, CAN/CSA C22.2 No. 62368-1, TUV BS EN/EN62368-1, BSMI CNS15598-1, AS/NZS62368.1, EAC TP TC 004 approved			
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC			
	ISOLATION R ESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C/ 70% RH			
	EMC EMISS ION	Parameter	Standard	Test Level / Note	
		Conducted	BS EN/EN55032(CISPR32),CNS 15936	Class B(CISPR32) / Class A(CNS 15936)	
		Radiated	BS EN/EN55032(CISPR32),CNS 15936	Class A(CISPR32 & CNS 15936)	
		Harmonic Current	BS EN/EN61000-3-2	Class A	


SAFETY & EMC (Note 6)		Voltage Flicker	BS EN/EN61000-3-3	—
	EMC IMMUNITY	BS EN/EN55024, BS EN/EN61000-6-2, BSMI CNS15598-1, design refer to SEMI F47 at 200Vac		
		Parameter	Standard	Test Level / Note
		ESD	BS EN/EN61000-4-2	Level 3, 8KV air ; Level 2, 4KV contact
		Radiated	BS EN/EN61000-4-3	Level 3
		EFT / Burst	BS EN/EN61000-4-4	Level 3
		Surge	BS EN/EN61000-4-5	Level 4, 2KV/Line-Line 4KV/Line-Earth
		Conducted	BS EN/EN61000-4-6	Level 3
		Magnetic Field	BS EN/EN61000-4-8	Level 4
		Voltage Dips and Interruptions	BS EN/EN61000-4-11	>95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods
OTHERS	MTBF	684.7K hrs min. Telcordia SR-332 (Bellcore) ; 69.2K hrs min. MIL-HDBK-217F (25°C)		
	DIMENSION	300*85*41mm (L*W*H)		
	PACKING	1.8Kg;6pcs/11.8Kg/1.25CUFT		
NOTE	<div>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</div> <div>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.</div> <div>3. Tolerance : includes set up tolerance, line regulation and load regulation.</div> <div>4. Derating may be needed under low input voltages. Please check the derating curve for more details.</div> <div>5. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 720mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies."</div> <div>6. (as available on https://www.meanwell.com//Upload/PDF/EMI_statement_en.pdf)</div> <div>7. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitudes higher than 2000m(6500ft).</div> <div>Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx</div>			

Block Diagram



PFC fosc : 90KHz
PWM fosc : 70KHz

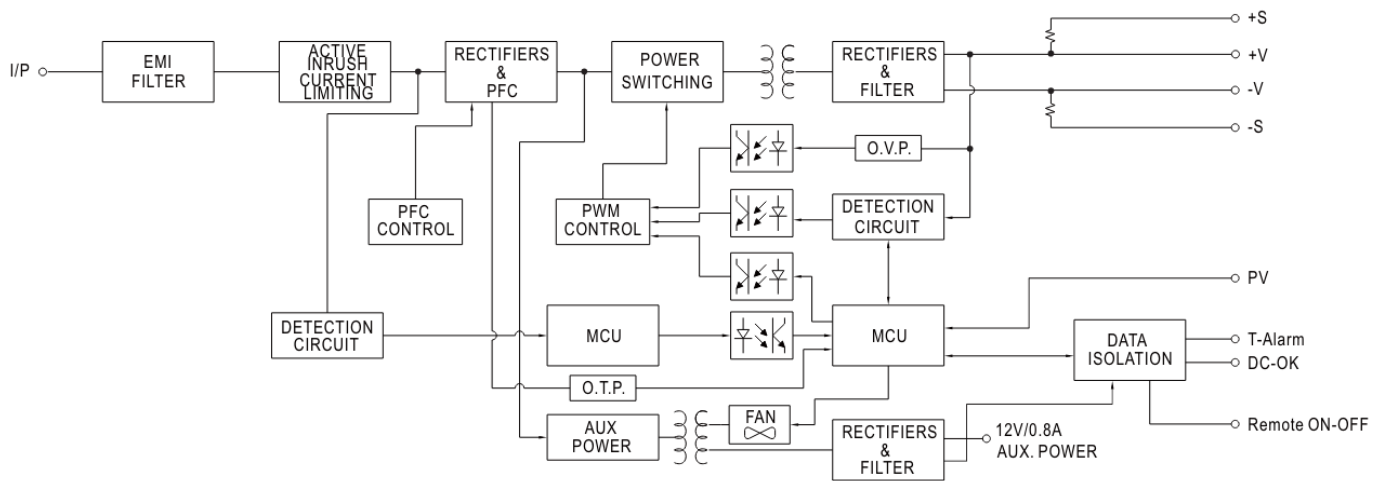

Static Characteristics

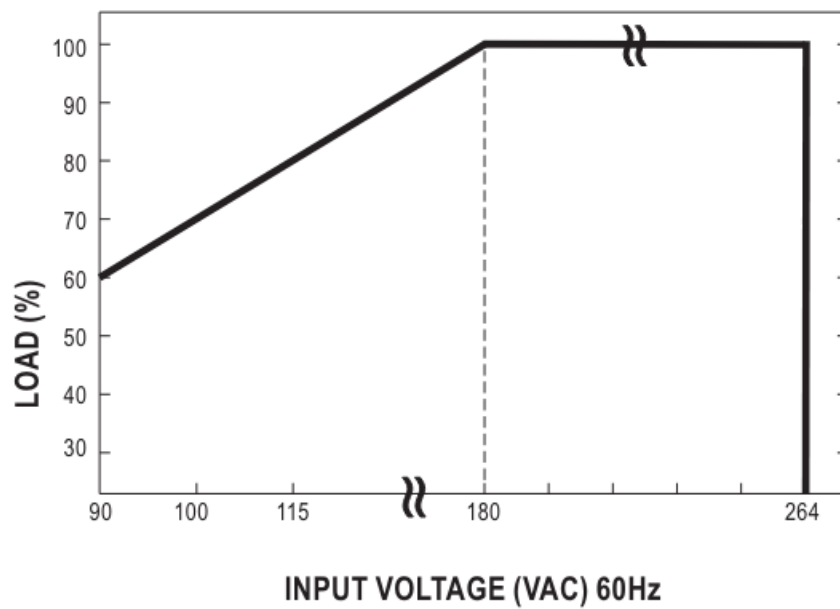

- Derating Curve
- Efficiency vs Load (48V Model)

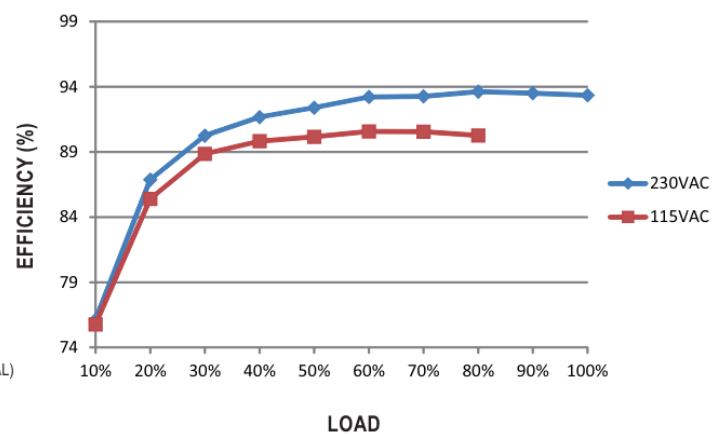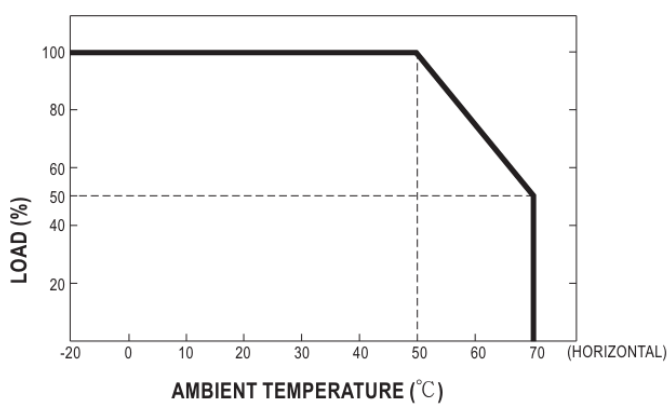


© The curve above is measured at 115/230VAC.

1. Voltage Drop Compensation

- Remote Sense


The Remote Sense compensates voltage drop on the load wiring up to 0.5V

-

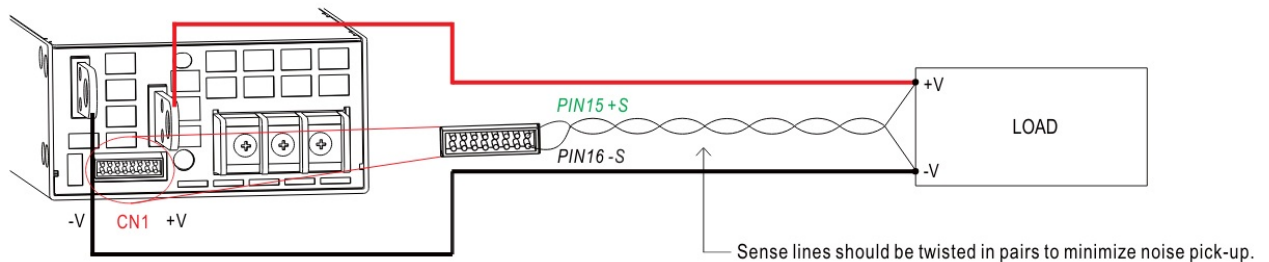


The +S signal should be connected to the positive terminal of the load whereas -S signal to the negative terminal.



- Local Sense
- The +S, -S have to be connected to the +V(signal), -V(signal), respectively, as the following diagram, in order to get the correct output voltage if Remote Sense is not used.

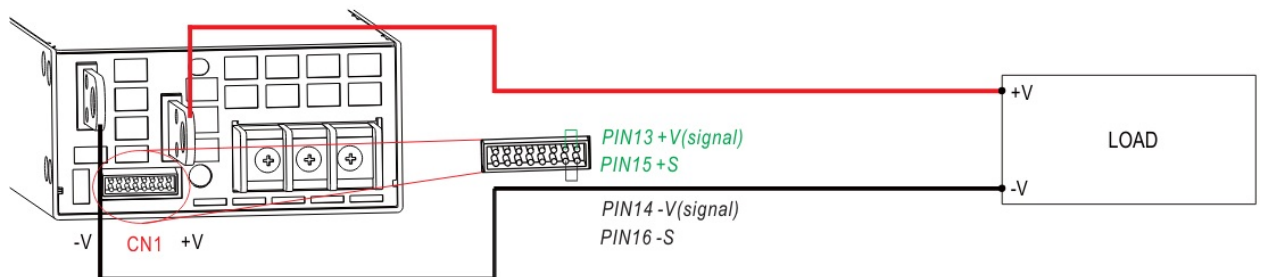

2. Output Voltage Programming (or, PV / remote voltage programming / remote adjust / margin programming / dynamic voltage trim)

- In addition to the adjustment via the built-in potentiometer, the output voltage can be trimmed by applying EXTERNAL VOLTAGE.

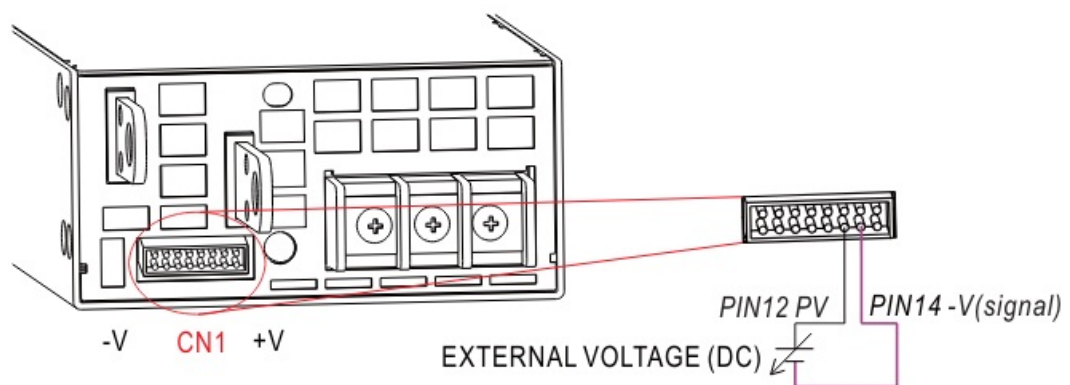


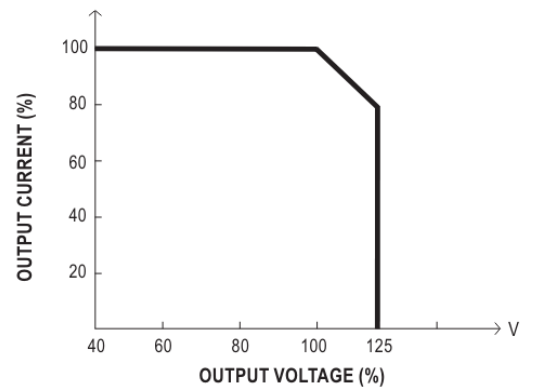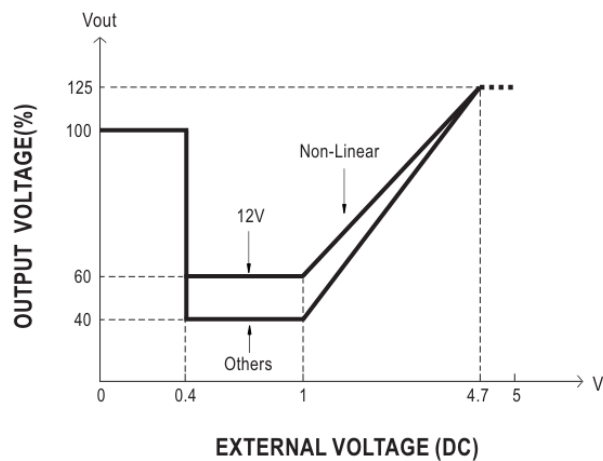

- The rated current should change with the Output Voltage Programming accordingly.
- For Remote Sense / Local Sense, please refer to “Voltage Drop Compensation” section.

3. Remote ON-OFF Control


The power supply can be turned ON/OFF individually or along with other units by using the “Remote ON-OFF” function.

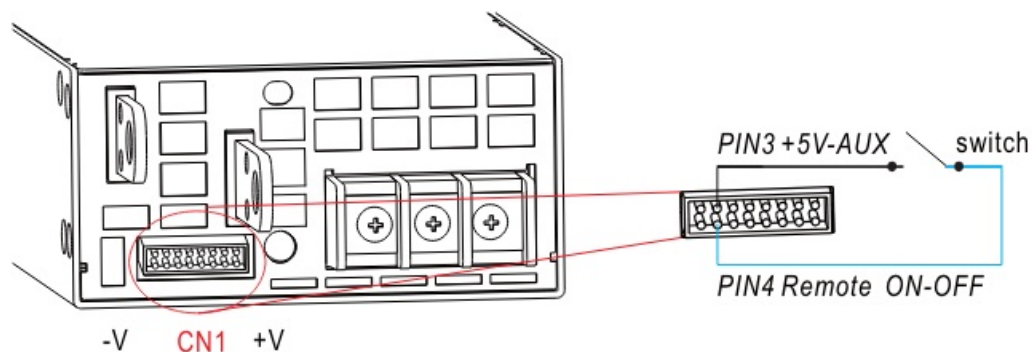

Between Remote ON-OFF and +5V-AUX	Power Supply Status
Switch Short	ON
Switch Open	OFF

Alarm Signal Output


There are 2 alarm signals, DC OK and T-ALARM, in TTL signal form, on CN1. These signals are isolated from output. The maximum sink current is 10mA.

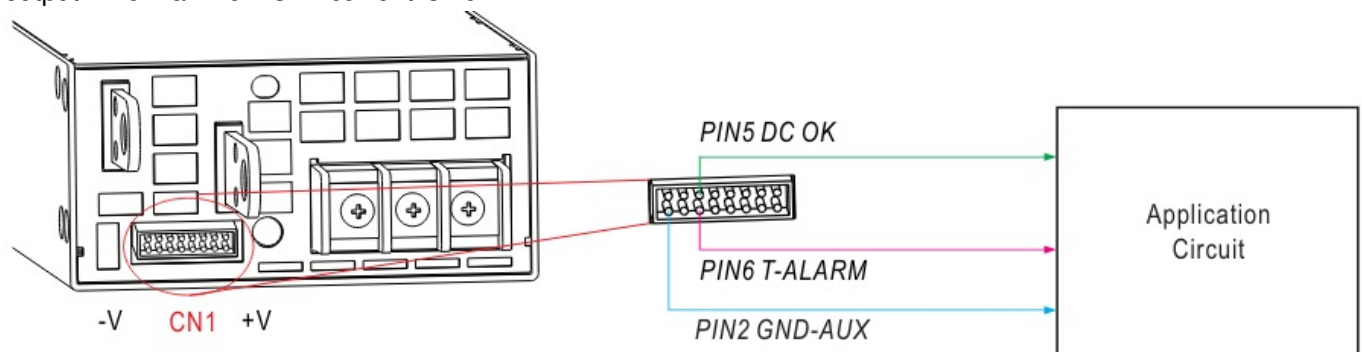

DC OK Fail signal	Power Supply Status
“High” > 3.5~5.5V	$V_{out} \leq 77\% \pm 5\%$
“Low” < -0.5~0.5V	$V_{out} \geq 80\% \pm 5\%$


T-ALARM	Power Supply Status
“High” > 3.5~5.5V	OFF(OTP or Fan Fail)
“Low” < -0.5~0.5V	ON(Normal Work)

Mechanical Specification

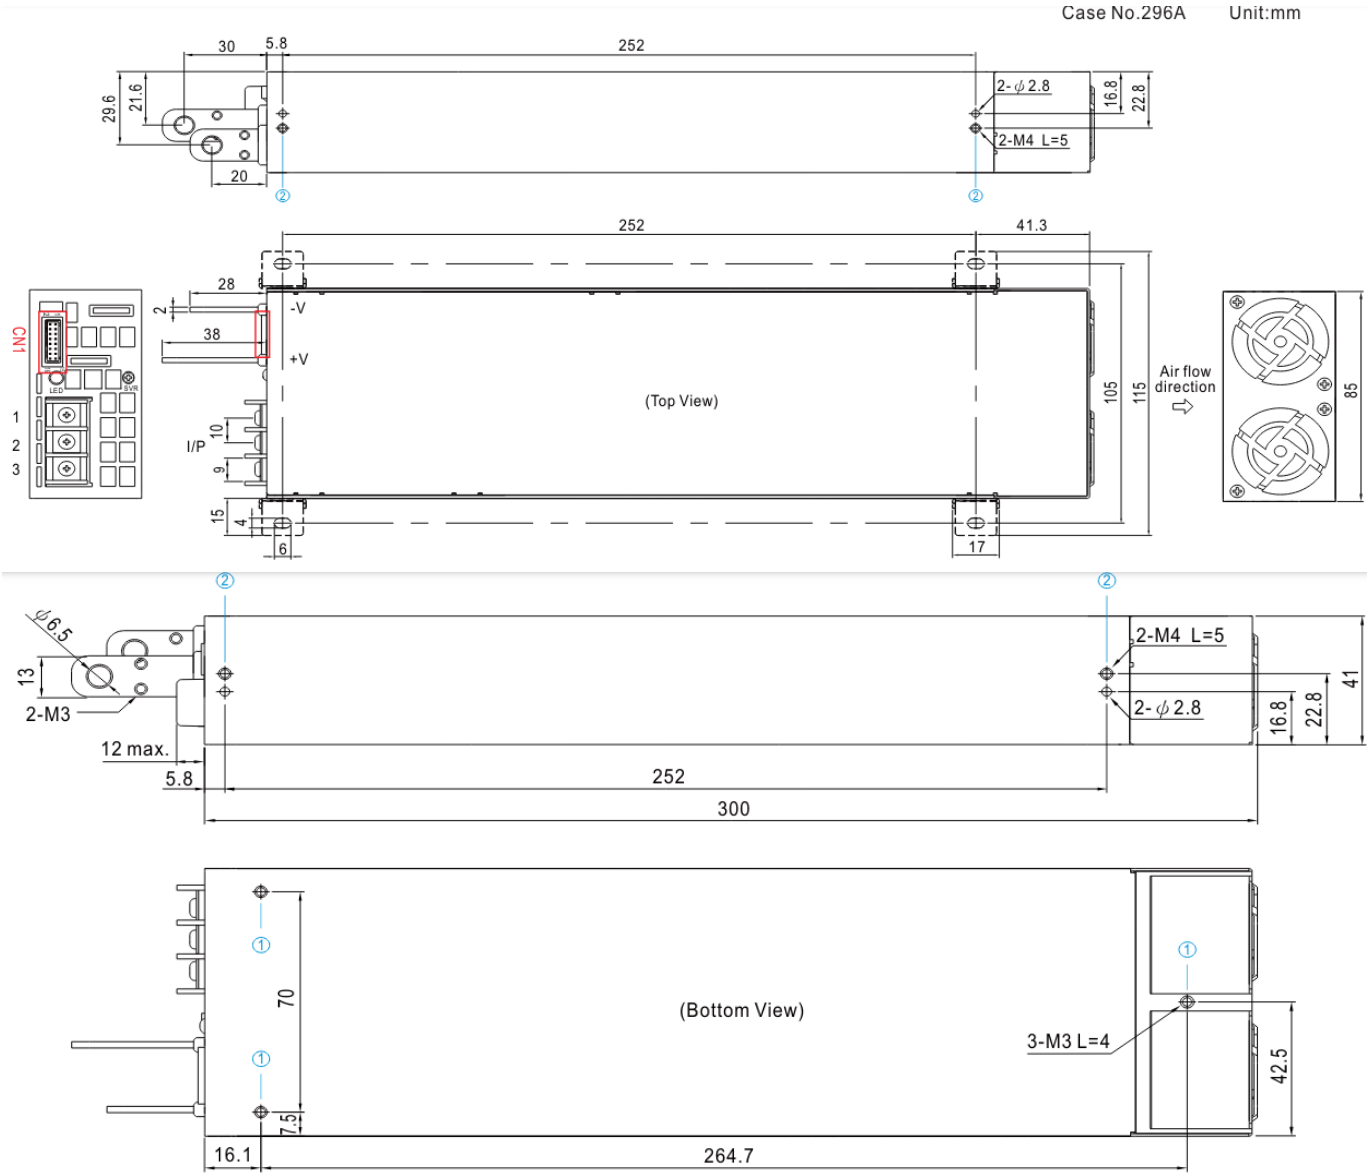

Mounting Instruction

Hole No .	Recommended Screw Si ze	MAX. Penetration Depth L	Recommended mounting torque
1	M3	4mm	6~8Kgf-cm
2	M4	5mm	7~10Kgf-cm

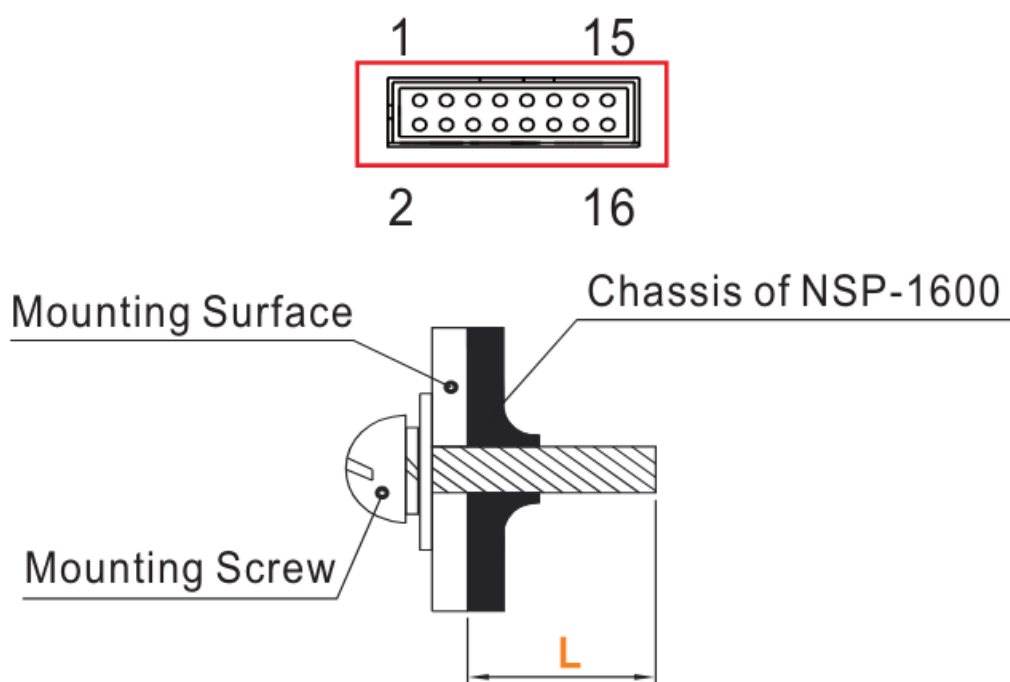



Control Pin No. Assignment(CN1) : HRS DF11-16DP-2DS or equivalent

Mating Housing	HRS DF11-16DS or equivalent
Terminal	HRS DF11-**-SC or equivalent


Pin No.	Function	Description
1	+12V-AUX	<ul style="list-style-type: none"> Auxiliary voltage output, 10.6~13.2V, referenced to GND-AUX (pin2). The maximum load current is 0.8A. This output has the built-in “Oring diodes” and is not controlled by “Remote ON-OFF”.
2	GND-AUX	<ul style="list-style-type: none"> Auxiliary voltage output GND. The signal return is isolated from the output terminals (+V & -V).
3	+5V-AUX	This pin is use for remote ON-OFF usage only.
4	Remote ON-OFF	The unit can turn the output ON/OFF by electrical signal or dry contact between <i>Remote ON/OFF</i> and <i>+5V-AUX</i> . (Note.2) Short (4.5 ~ 5.5V) : Power ON ; Open (0 ~ 0.5V) : Power OFF ; The maximum input voltage is 5.5V.
5	DC-OK	<ul style="list-style-type: none"> High (3.5 ~ 5.5V) : When the $V_{out} \leq 77\% \pm 5\%$. Low (-0.5 ~ 0.5V) : When $V_{out} \geq 80\% \pm 5\%$. The maximum sourcing current is 10mA and only for output. (Note.2)
6	T-ALARM	<ul style="list-style-type: none"> High (3.5 ~ 5.5V) : When the internal temperature exceeds the limit of temperature alarm , or when Fan fails. Low (-0.5 ~ 0.5V) : When the internal temperature is normal, and when Fan normally works. The maximum sourcing current is 10mA and only for output(Note.2)
7,8,9	NC	Retain for future use.
10,11	NC	Retain for future use.
12	PV	Connection for output voltage programming. (Note.1)
13	+V (Signal)	<p>Positive output voltage signal.</p> <p>It is for local sense; it cannot be connected directly to the load.</p>
14	-V (Signal)	<p>Negative output voltage signal.</p> <p>It is for local sense and certain function reference; it cannot be connected directly to the load .</p>
15	+S	Positive sensing for remote sense.
16	-S	Negative sensing for remote sense.

- Note.1: Non-isolated signal, referenced to [-V(signal)].
- Note.2: Isolated signal, referenced to GND-AUX.

LED Status Indicators

LED	Description
 Green	The power supply functions normally.
 Red	Abnormal status (Over temperature protection, Overload protection, Fan fail.)

AC Input Terminal Pin No. Assignment


Pin No.	Assignment	Diagram	Maximum mounting torque
1	FG \perp		8Kgf-cm
2	AC/N		
3	AC/L		

Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>

File Name: NSP-1600-SPEC 2024-02-15

Documents / Resources

	<p>MEAN WELL NSP-1600 Series 1600W Power Supply with Single Output [pdf] Owner's Manual</p> <p>NSP-1600 Series, NSP-1600 Series 1600W Power Supply with Single Output, 1600W Power Supply with Single Output, Power Supply with Single Output, Single Output, Output</p>
--	--

References

- [TÜV Rheinland - Home | AU | TÜV Rheinland](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.