



MEAN WELL RSP-2000-12 S Series 2000W Power Supply with Single Output Owner's Manual

[Home](#) » [MEAN WELL](#) » MEAN WELL RSP-2000-12 S Series 2000W Power Supply with Single Output Owner's Manual 

Contents

- [1 MEAN WELL RSP-2000-12 S Series 2000W Power Supply with Single Output](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 Features](#)
- [5 Description](#)
- [6 SPECIFICATION](#)
- [7 Block Diagram](#)
- [8 Static Characteristics](#)
- [9 Function Manual](#)
- [10 Mechanical Specification](#)
- [11 Dimension](#)
- [12 Documents / Resources](#)
 - [12.1 References](#)
- [13 Related Posts](#)



MEAN WELL RSP-2000-12 S Series 2000W Power Supply with Single Output



Product Information

The RSP-2000 series is a 2000W Power Supply with a single output. It is designed for various applications that require high power output and reliable performance. The power supply is available in three models: RSP-2000-12, RSP-2000-24, and RSP-2000-48, which provide DC voltages of 12V, 24V, and 48V respectively.

The RSP-2000 series power supply offers a rated power of 1200W for the 12V model, 1920W for the 24V model, and 2000W for the 48V model. It has a voltage adjustment range of 10.5V to 14V for the 12V model, 21 V to 28V for the 24V model, and does not specify the voltage adjustment range for the 48V model.

The power supply has a ripple and noise level of maximum 150m Vp-p for the 12V model and maximum 200m Vp-p for the 24V and 48V models. It has a line regulation and load regulation feature to maintain stable output voltage under varying input conditions.

The RSP-2000 series power supply has a wide input voltage range of 90VAC to 264VAC and a frequency range of 47Hz to 63Hz. It has a high efficiency of 87% and a power factor of 0.97 at full load and 230VAC input. The power supply also features protection mechanisms such as over-temperature protection (O.T.P.), over-voltage protection (O.V.P.), and remote ON-OFF control. The dimensions of the RSP-2000 series power supply are 295mm x 127mm x 41mm (L x W x H), and it weighs approximately 1.95kg. It comes with a user manual and complies with safety standards such as UL62368-1, BS EN/EN62368-1, IEC62368-1, and Bauartgepruft Sicherheit.

Product Usage Instructions

1. Ensure that the input voltage is within the specified range of 90VAC to 264VAC.
2. Select the appropriate model of the power supply based on the required DC voltage output (12V, 24V, or 48V).
3. Connect the input power source to the power supply using the appropriate cables and connectors.
4. Verify that the power supply is securely mounted in the final equipment according to the provided guidelines.
5. If necessary, adjust the output voltage within the specified voltage adjustment range using the appropriate controls.
6. Monitor the load percentage and ensure it does not exceed the rated current and power values for the selected model.
7. If remote ON-OFF control is required, connect the corresponding terminals according to the provided

instructions.

8. Ensure proper ventilation and cooling for the power supply, especially if operating at high ambient temperatures or at altitudes above 2000m (6500ft).
9. Refer to the user manual for further information on troubleshooting, maintenance, and safety precautions.

Features



- Universal AC input / Full range
- Built-in active PFC function
- High efficiency up to 92%
- Forced air cooling by built-in DC fan
- Output voltage programmable
- Active current sharing up to 8000W (3+1)
- Built-in remote ON-OFF control / remote sense /auxiliary power / DC OK signal / OTP alarm signal
- Protections: Short circuit / Overload / Over voltage/ Over temperature
- Optional conformal coating
- 5 years warranty

Applications

- Factory control or automation apparatus
- Test and measurement instrument
- Laser related machine
- Burn-in facility
- Digital broadcasting
- RF application

GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

Description

RSP-2000 is a 2KW single-output enclosed type AC/DC power supply with 1U low profile. This series operates for 90~264VAC input voltage and offers the models with the DC output mostly demanded from the industry. Each model is cooled by the built-in fan with fan speed control, working for a temperature up to 70°C. Moreover, RSP-2000 provides vast design flexibility by equipping various built-in functions such as the output programming, active current sharing, remote ON-OFF control, auxiliary power, etc.

Model Encoding / Order Information

RSP - 2000 - 48

Output voltage (12V/24V/48V)

Output wattage


Series name

SPECIFICATION

MODEL		RSP-2000-12	RSP-2000-24	RSP-2000-48
OUTP UT	DC VOLTAGE	12V	24V	48V
	RATED CURREN T	100A	80A	42A
	CURRENT RANG E	0 ~ 100A	0 ~ 80A	0 ~ 42A
	RATED POWER	1200W	1920W	2016W
	RIPPLE & NOISE (max.) Note.2	150mVp-p	200mVp-p	300mVp-p
	VOLTAGE ADJ. R ANGE	10.5 ~ 14V	21 ~ 28V	42 ~ 56V
	VOLTAGE TOLER ANCE Note.3	±2.0%	±1.0%	±1.0%
	LINE REGULATI ON	±1.0%	±0.5%	±0.5%
	LOAD REGULATI ON	±1.0%	±0.5%	±0.5%
	SETUP, RISE TIM E	1500ms, 60ms/230VAC at full load		
	HOLD UP TIME (Typ.)	16ms/230VAC at 75% load 10ms/230VAC at full load		
INPU	VOLTAGE RANG E Note. 4,5	90 ~ 264VAC 127 ~ 320VDC		
	FREQUENCY RA NGE	47 ~ 63Hz		
	POWER FACTOR (Typ.)	0.97/230VAC at full load		
	EFFICIENCY (Ty p.)	87%	90.5%	92%


T							
	AC CURRENT (Typ.) No. te.4	13A/115VAC 0VAC	7A/23	16A/115VAC 30VAC	10A/2	16A/115VAC 30VAC	10A/2
	INRUSH CURRENT (Typ.)	COLD START 50A					
	LEAKAGE CURRENT	<2mA / 240VAC					
PROTECTION	OVERLOAD	105 ~ 125% rated output power					
		Protection type : Constant current limiting, unit will shut down o/p voltage after 5 sec. re-power on to recover					
	OVER VOLTAGE	14.7 ~ 17.5V		29.5 ~ 35V		57.6 ~ 67.2V	
		Protection type : Shut down o/p voltage, re-power on to recover					
OVER TEMPERATURE	Shut down o/p voltage, recovers automatically after temperature goes down						
FUNCTION	OUTPUT VOLTAGE PROGRAMMABLE(PV)	Adjustment of output voltage is allowable to 40 ~ 115% of nominal output voltage. Please refer to the Function Manual.					
	CURRENT SHARING	Up to 8000W or (3+1) units. Please refer to the Function Manual.					
	AUXILIARY POWER	5V @ 0.3A, 12V @ 0.8A					
	REMOTE ON-OFF CONTROL	By electrical signal or dry contact Power ON:open Power OFF:short. Please refer to the Function Manual.					
	REMOTE SENSE	Compensate voltage drop on the load wiring up to 0.5V. Please refer to the Function Manual.					
	DC OK SIGNAL	The isolated TTL signal out. Please refer to the Function Manual.					
ENVIRONMENT	WORKING TEMP.	-35 ~ +70°C (Refer to “Derating Curve”)					
	WORKING HUMIDITY	20 ~ 90% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH non-condensing					
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)					
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes					
	SAFETY STANDARDS	UL62368-1, CSA C22.2 No. 62368-1, TUV BS EN/EN62368-1, BSMI CNS14336-1, AS/NZS62368.1, EAC TP TC 004 approved					
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC					

SAFE TY & EMC (Note 6)				
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C/ 70% RH		
	EMC EMISSION	Parameter	Standard	Test Level / Note
		Conducted	BS EN/EN55032 (CISPR 32)	Class B
		Radiated	BS EN/EN55032 (CISPR 32)	Class A
		Harmonic Current	BS EN/EN61000-3-2	—
		Voltage Flicker	BS EN/EN61000-3-3	—
	EMC IMMUNITY	BS EN/EN55035, BS EN/EN61000-6-2, BSMI CNS13438		
		Parameter	Standard	Test Level / Note
		ESD	BS EN/EN61000-4-2	Level 3, 8KV air ; Level 2, 4KV contact
		Radiated	BS EN/EN61000-4-3	Level 3
		EFT / Burst	BS EN/EN61000-4-4	Level 3
		Surge	BS EN/EN61000-4-5	Level 4, 4KV/Line-Earth ; Level 3, 2KV/Line-Line
		Conducted	BS EN/EN61000-4-6	Level 3
		Magnetic Field	BS EN/EN61000-4-8	Level 4
		Voltage Dips and Interruptions	BS EN/EN61000-4-11	>95% dip 0.5 periods, 30 % dip 25 periods, >95% interruptions 250 p periods
OTHERS	MTBF	487.7K hrs min. Telcordia SR-332 (Bellcore) ; 42.9K hrs min. MIL-HDBK-217F (25°C)		
	DIMENSION	295*127*41mm (L*W*H)		
	PACKING	1.95Kg; 6pcs/12.7Kg/1.15CUFT		

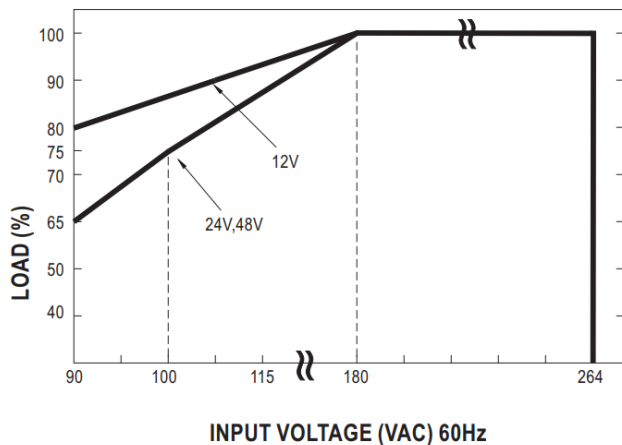


MODEL INPUT	12V	24V	48V
180~264VAC	1200W 100A	1920W 80A	2016W 42A
115VAC	1080W 90A	1632W 68A	1713.6W 35.7A
100VAC	1020W 85A	1440W 60A	1512W 31.5A
90VAC	960W 80A	1248W 52A	1310.4W 27.3A

Derating Curve

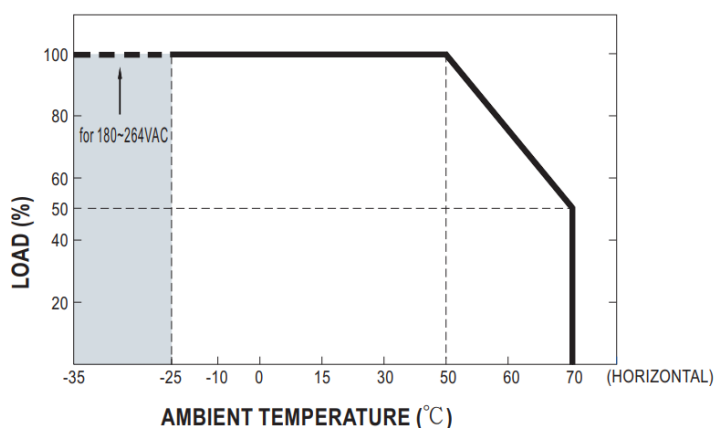

Efficiency vs Load (48V Model)

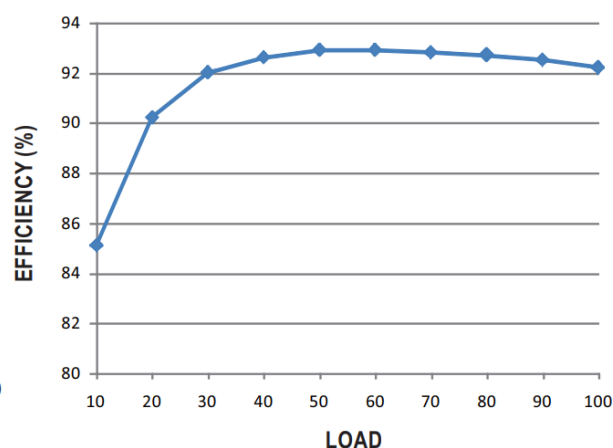


⊙ The curve above is measured at 230VAC.

Function Manual

1. Remote Sense

The Remote Sense compensates voltage drop on the load wiring up to 0.5V.

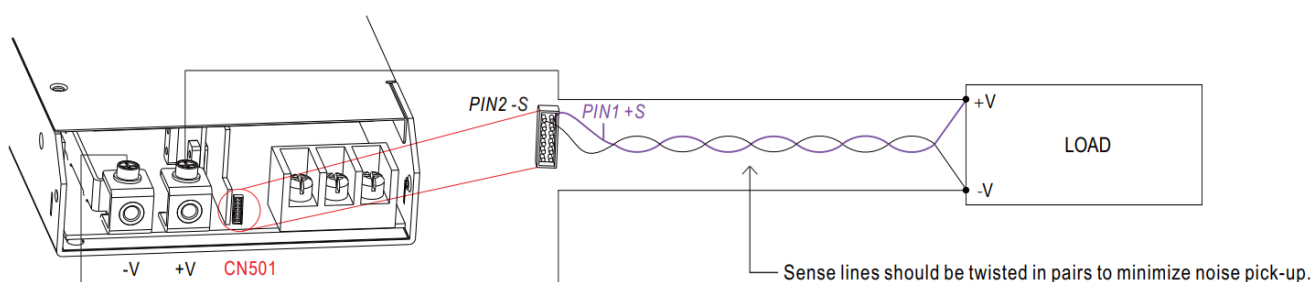


⊙ The +S signal should be connected to the positive terminal of the load whereas -S signal to the negative terminal.



The +S signal should be connected to the positive terminal of the load whereas -S signal to the negative terminal.

2. Output Voltage Programming (or, PV / remote voltage programming / remote adjust / margin programming / dynamic voltage trim)

In addition to the adjustment via the built-in potentiometer, the output voltage can be trimmed to 40~115% of the nominal voltage by applying EXTERNAL VOLTAGE.

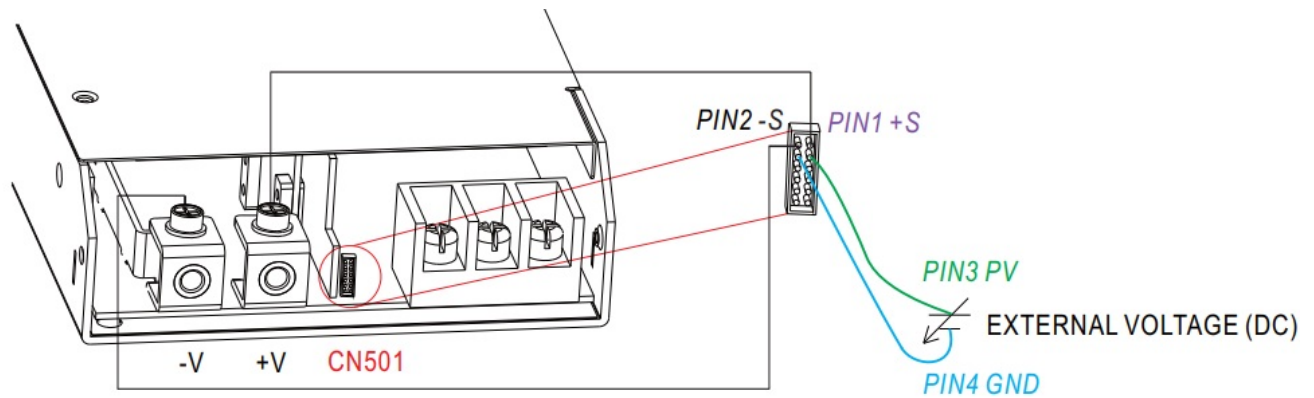


⊙ +S & +V, -S & -V also need to be connected on CN501.

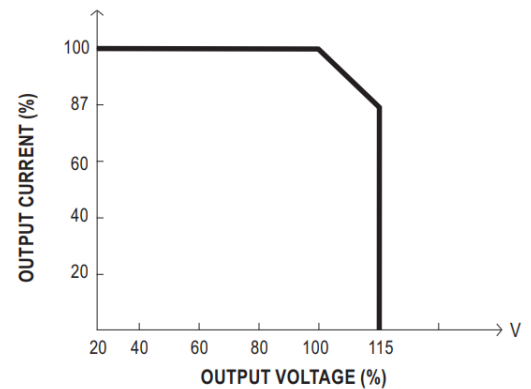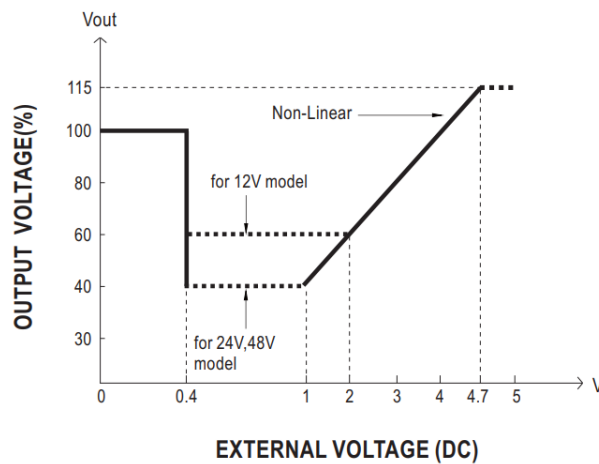

⊙ The rated current should change with the Output Voltage Programming accordingly.

3. Remote ON-OFF Control

The power supply can be turned ON/OFF individually or along with other units by using the “Remote ON-OFF” function.

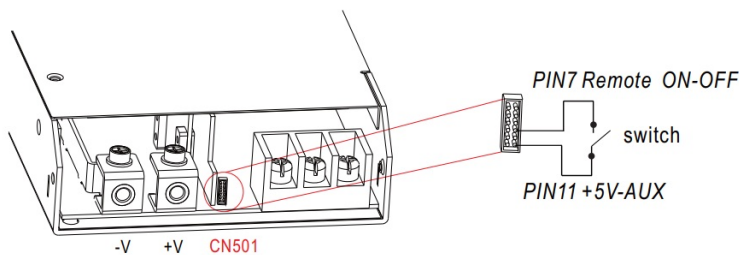

Between Remote ON-OFF and +5V-AUX	Power Supply Status
Switch Open	ON
Switch Short	OFF

4. Current Sharing with Remote Sense

RSP-2000 has the built-in active current sharing function and can be connected in parallel, up to 4 units, to provide higher output power as exhibited below:

- The power supplies should be paralleled using short and large diameter wiring and then connected to the load.
- Difference of output voltages among parallel units should be less than 0.2V.
- The total output current must not exceed the value determined by the following equation: Maximum output current at parallel operation = (Rated current per unit) (Number of unit) $\times 0.9$.
- Under parallel operation, the minimum output load should be greater than 5% of total output load; otherwise, it is likely that only one unit operates whereas other units may enter standby mode or their LED status indicators may not turn on.
- When the total output current is less than 5% of the total rated current, or say (5% of Rated current per unit) \times (Number of unit) the current shared among units may not be fully balanced.

- CN502/CN504 Function pin connection.

Parallel	PSU1		PSU2		PSU3		PSU4	
	CN502	CN504	CN502	CN504	CN502	CN504	CN502	CN504
1 unit	X	V						
2 unit	V	V	V	V				
3 unit	V	V	V	X	V	V		
4 unit	V	V	V	X	V	X	V	V

◎V is CN502/CN504 connected to plug pin, X is CN502/CN504 not connected to plug pin.



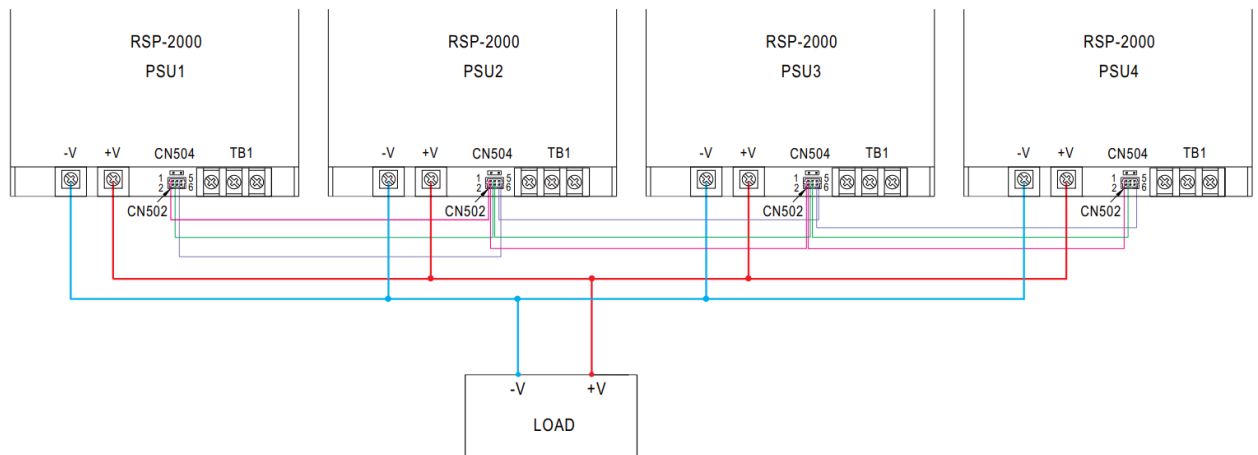


Fig 4.1

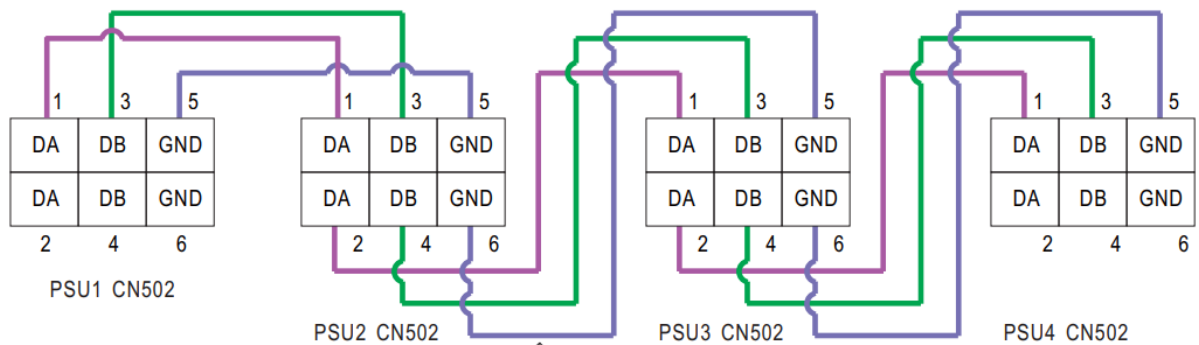


If the lines of CN502 are too long, they should be twisted in pairs to avoid the noise.


Mechanical Specification

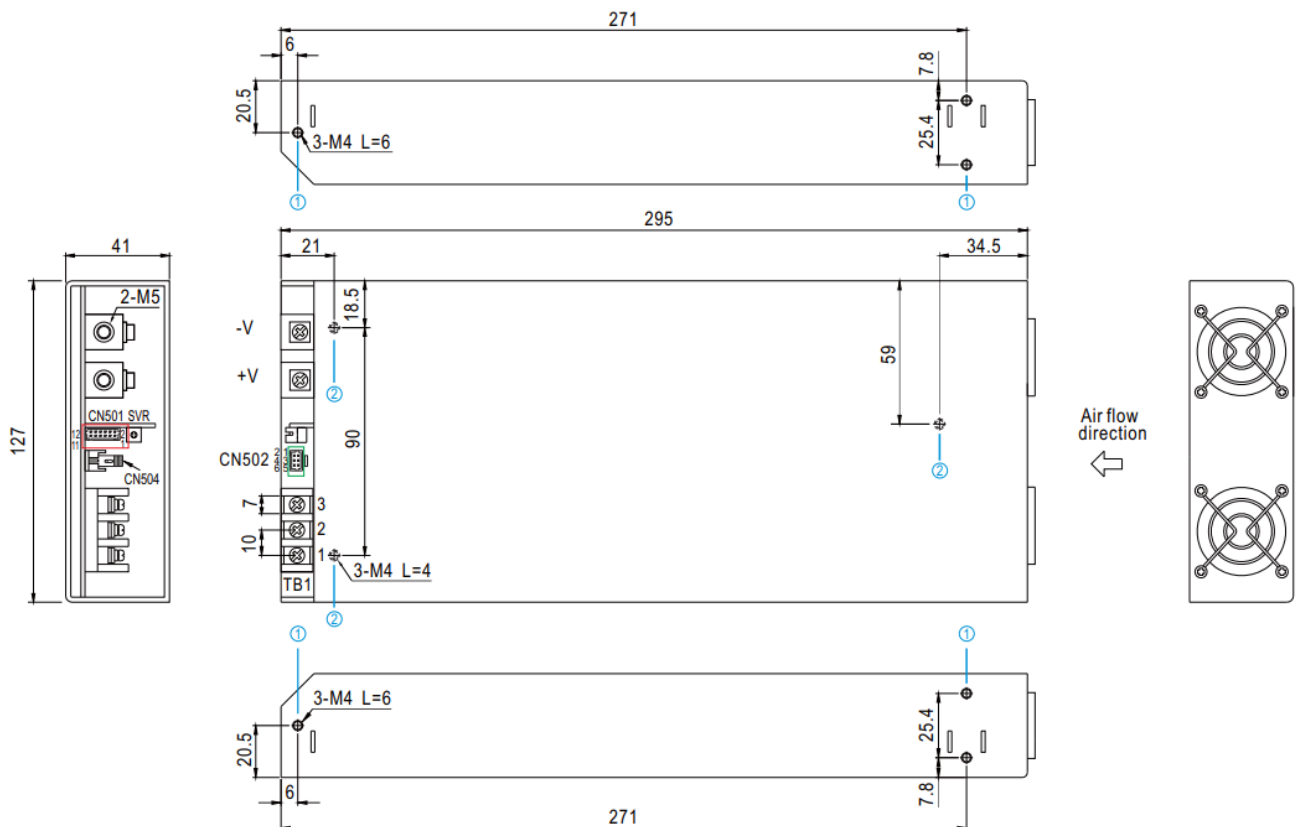

Hole No.	Recommended Screw Size	MAX. Penetration Depth L	Recommended mounting torque
①	M4	6mm	7~10Kgf-cm
②	M4	4mm	7~10Kgf-cm

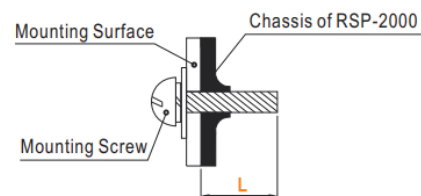

※Control Pin No. Assignment (CN501) : HRS DF11-12DP-2DS or equivalent



Mating Housing	HRS DF11-12DS or equivalent
Terminal	HRS DF11-12SC or equivalent

Pin No	Function	Description
1	+S	Positive sensing for remote sense.
2	-S	Negative sensing for remote sense.
3	PV	Connection for output voltage programming. (Note.1)
4	GND	This pin connect to the negative terminal(-V).
5	DC-OK	High (4.5 ~ 5.5V) : When the $V_{out} \leq 80\% \pm 6\%$. Low (0 ~ 0.5V) : When $V_{out} \geq 80\% \pm 6\%$. The maximum sourcing current is 10mA and only for output. (Note.2)
6	T-ALARM	High (4.5 ~ 5.5V) : When the internal temperature (TSW1 or TSW2 open) exceeds the limit of temperature alarm. Low (0 ~ 0.5V) : When the internal temperature (TSW1 or TSW2 short) under the limit temperature. The maximum sourcing current is 10mA and only for output. (Note.2)
7	Remote ON-OFF	The unit can turn the output on and off by electrical signal or dry contact between Remote ON-OFF and +5V-AUX. (Note.2) Short (4.5 ~ 5.5V) : Power OFF ; Open (0 ~ 0.5V) : Power ON ; The maximum input voltage is 5.5V.
8,9,10	GND-AUX	Auxiliary voltage output GND. The signal return is isolated from the output terminals (+V & -V).
11	+5V-AUX	Auxiliary voltage output, 4.5~5.5V, referenced to GND-AUX. The maximum load current is 0.3A. This output has the built-in "Oring diodes" and is not controlled by the Remote ON-OFF control.
12	+12V-AUX	Auxiliary voltage output, 10.6~13.2V, referenced to GND-AUX. The maximum load current is 0.8A. This output has the built-in "Oring diodes" and is not controlled by the Remote ON-OFF control.


Note 1: Non-isolated signal, referenced to the output terminals (-V).

Note 2: Isolated signal, referenced to GND-AUX.

Function	LED	Description	* Signal	Power Supply Output
DC-OK	GREEN	When output voltage $\geq 80\% \pm 5\%$ of V_o rated.	0 ~ 0.5V	ON
DC-NG	RED	When output voltage $\leq 80\% \pm 5\%$ of V_o rated.	4.5 ~ 5.5V	ON
T-OK	GREEN	When the internal temperature (TSW1 & TSW2 short) is within safe limit	0 ~ 0.5V	ON
T-ALARM	RED	When the internal temperature (TSW1 or TSW2 open) exceeds the limit of temperature alarm	4.5 ~ 5.5V	OFF

*Signal between function pin and "GND-AUX".

Control Pin No. Assignment (CN502): HRS DF11-6DP-2DSA or equivalent





Mating Housing	HRS DF11-6DS or equivalent
Terminal	HRS DF11-**SC or equivalent

Pin No.	Function	Description
1,2	DA	Differential digital signal for parallel control.
3,4	DB	Differential digital signal for parallel control.
5,6	GND	These pins connect to the negative terminal (-V).


Control Pin No. Assignment (CN504):

Pin No.	Function	Description
1,2	Terminal resistance	CN504 is the selector of terminal resistor that is designed for DA/DB signals and parallel control function.

AC Input Terminal Pin No. Assignment

Pin No.	Assignment	Diagram	Maximum mounting torque
1	AC/N	 	18Kgf-cm
2	AC/L		
3	FG \perp		

DC Output Terminal Pin No. Assignment

Assignment	Diagram	Maximum mounting torque
+V, -V		10Kgf-cm

Dimension

- **L:** 295/11.6
- **W:** 127/5
- **H:** 41 (1U) mm/1.61 (1U) inch

Installation Manual

Please refer to: <http://www.meanwell.com/manual.html>

Documents / Resources

