

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

> [JUBEST](#) /

> [JUBEST Steel Pocket Door Frame Kit \(36"x80"\) Instruction Manual](#)

## JUBEST TSQAL03-6.6FT

# JUBEST Steel Pocket Door Frame Kit (36"x80") Instruction Manual

## 1. INTRODUCTION

---

This manual provides detailed instructions for the installation, operation, and maintenance of your JUBEST Steel Pocket Door Frame Kit. This kit is designed to create a hidden sliding door system, optimizing space and providing a clean aesthetic. Please read all instructions carefully before beginning installation to ensure proper setup and safe operation.

## 2. SAFETY INFORMATION

---

- Always wear appropriate personal protective equipment (PPE) such as safety glasses and gloves during installation.
- Ensure the work area is clear of obstructions and well-lit.
- Verify that all structural elements (e.g., wall studs, headers) are sound and capable of supporting the door and frame kit's weight.
- Use proper lifting techniques when handling heavy components like the door.
- Keep children and pets away from the installation area.
- If you are unsure about any step, consult a qualified professional.

## 3. PACKAGE CONTENTS

---

Verify that all components listed below are present and undamaged before beginning installation.




Image: All components of the JUBEST Pocket Door Frame Kit laid out, including steel track, mounting brackets, steel tube studs, door hangers, floor brackets, floor guides, and bumper.

- 1 x Steel Track
- 8 x Mounting Brackets
- 4 x Steel Tube Studs
- 2 x Door Hangers
- 2 x Floor Brackets
- 2 x Floor Guides
- 1 x Bumper
- Wrench & Instructions (this manual)

## 4. PRODUCT OVERVIEW

---

The JUBEST Steel Pocket Door Frame Kit features a robust design with galvanized steel components for enhanced durability and resistance to corrosion. The system includes well-designed hangers for smooth and jump-proof door operation.

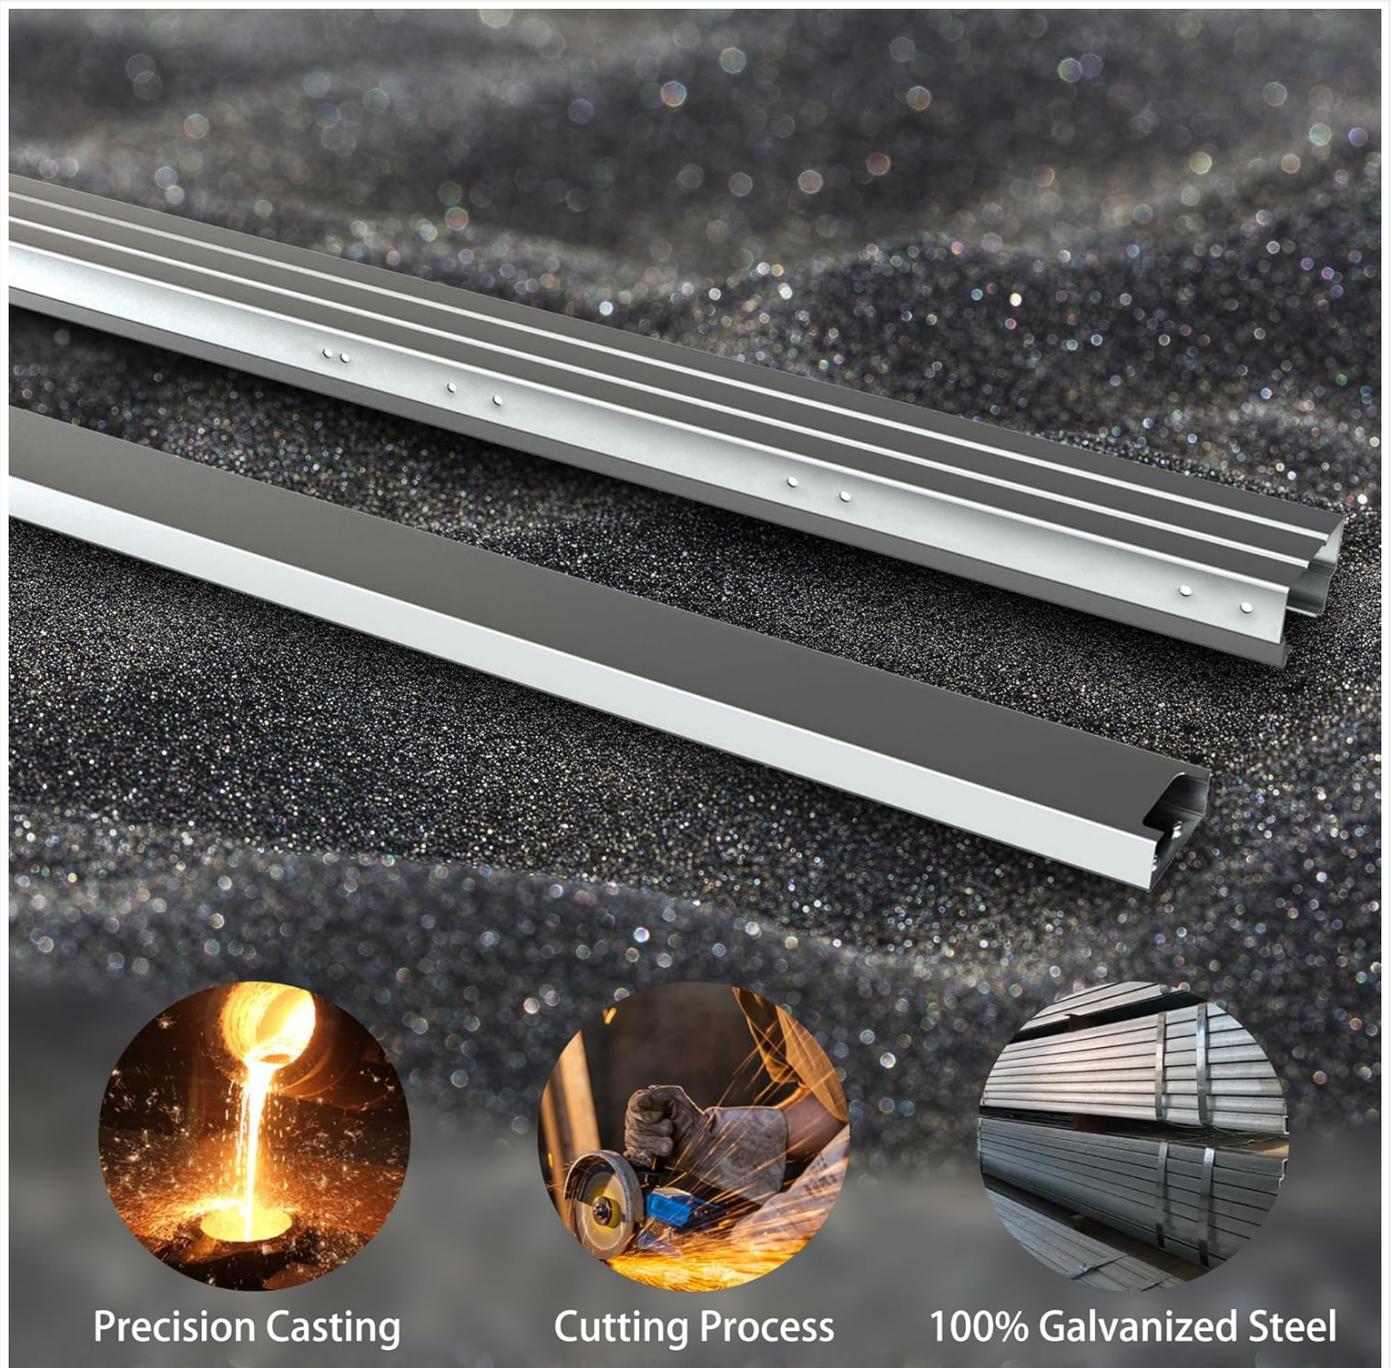

**Precision Casting**

**Cutting Process**

**100% Galvanized Steel**

Image: JUBEST Steel Pocket Door Frame Kit components, highlighting precision casting, cutting process, and 100% galvanized steel material.

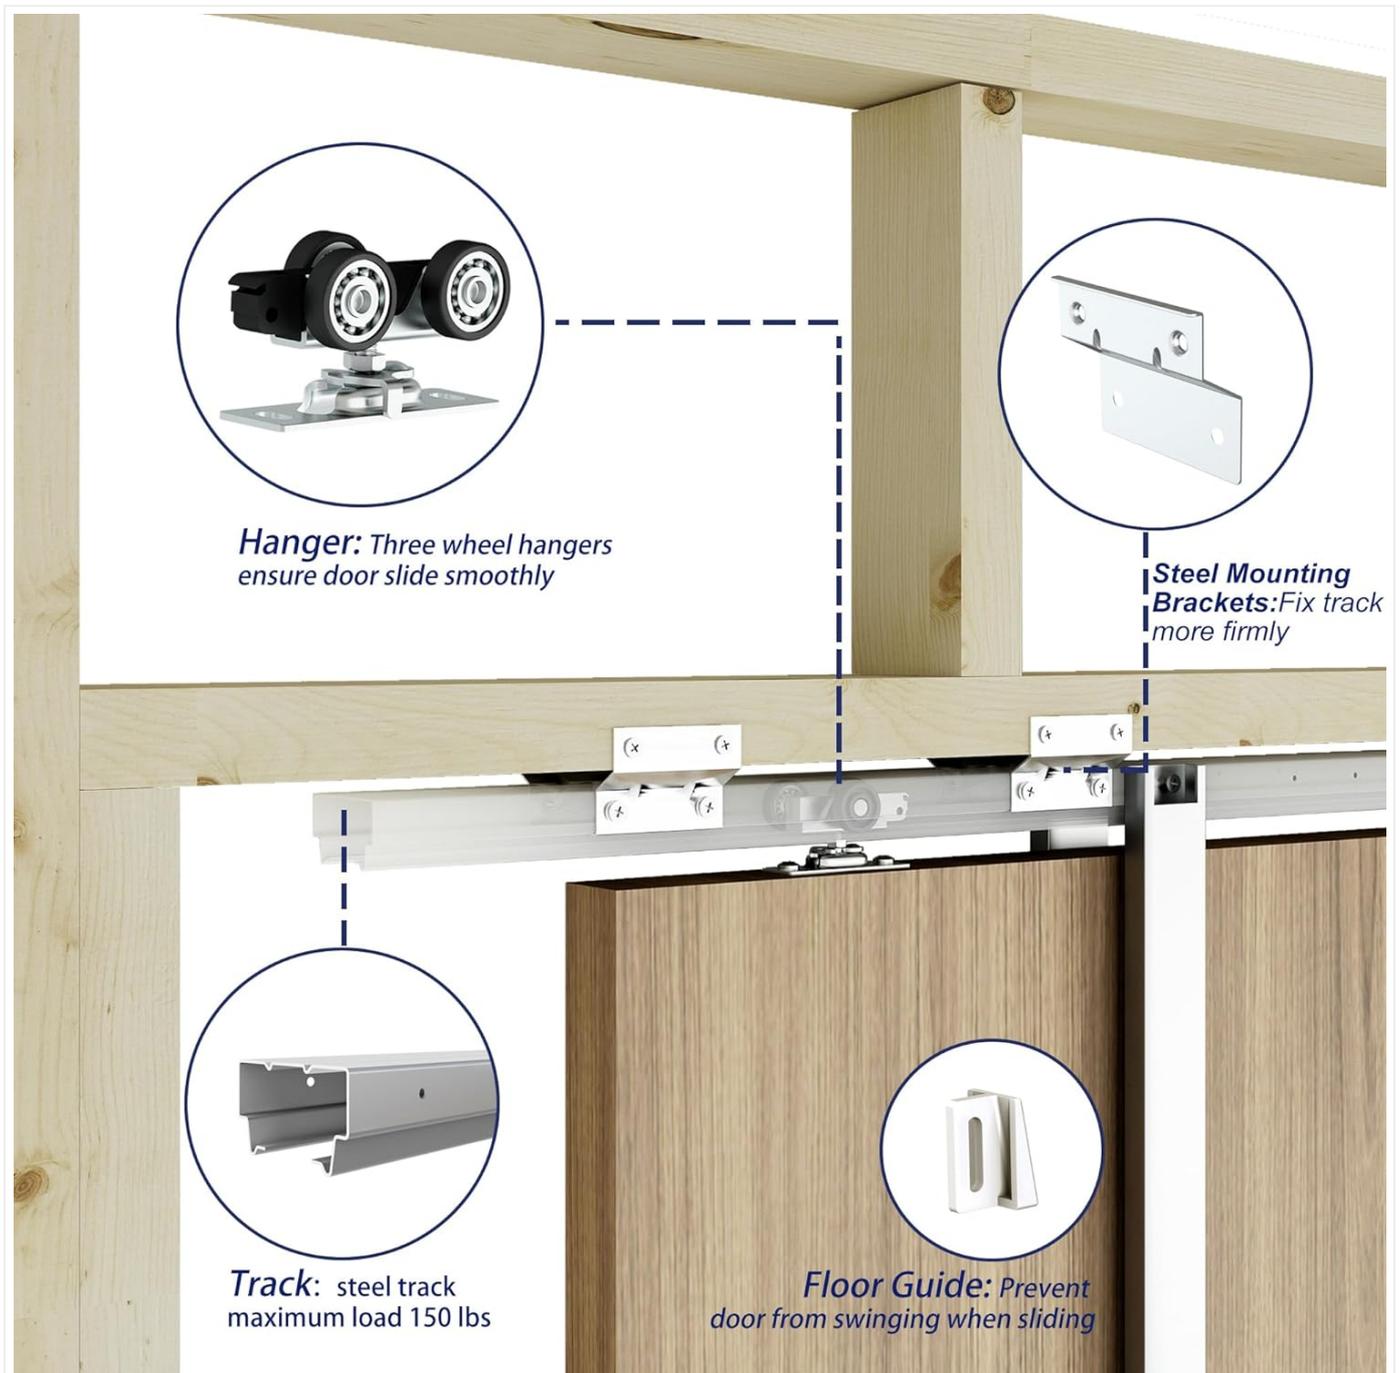


Image: Diagram showing the pocket door frame components: three-wheel hangers for smooth sliding, steel mounting brackets for firm track fixation, steel track with 150 lbs max load, and floor guide to prevent door swinging.

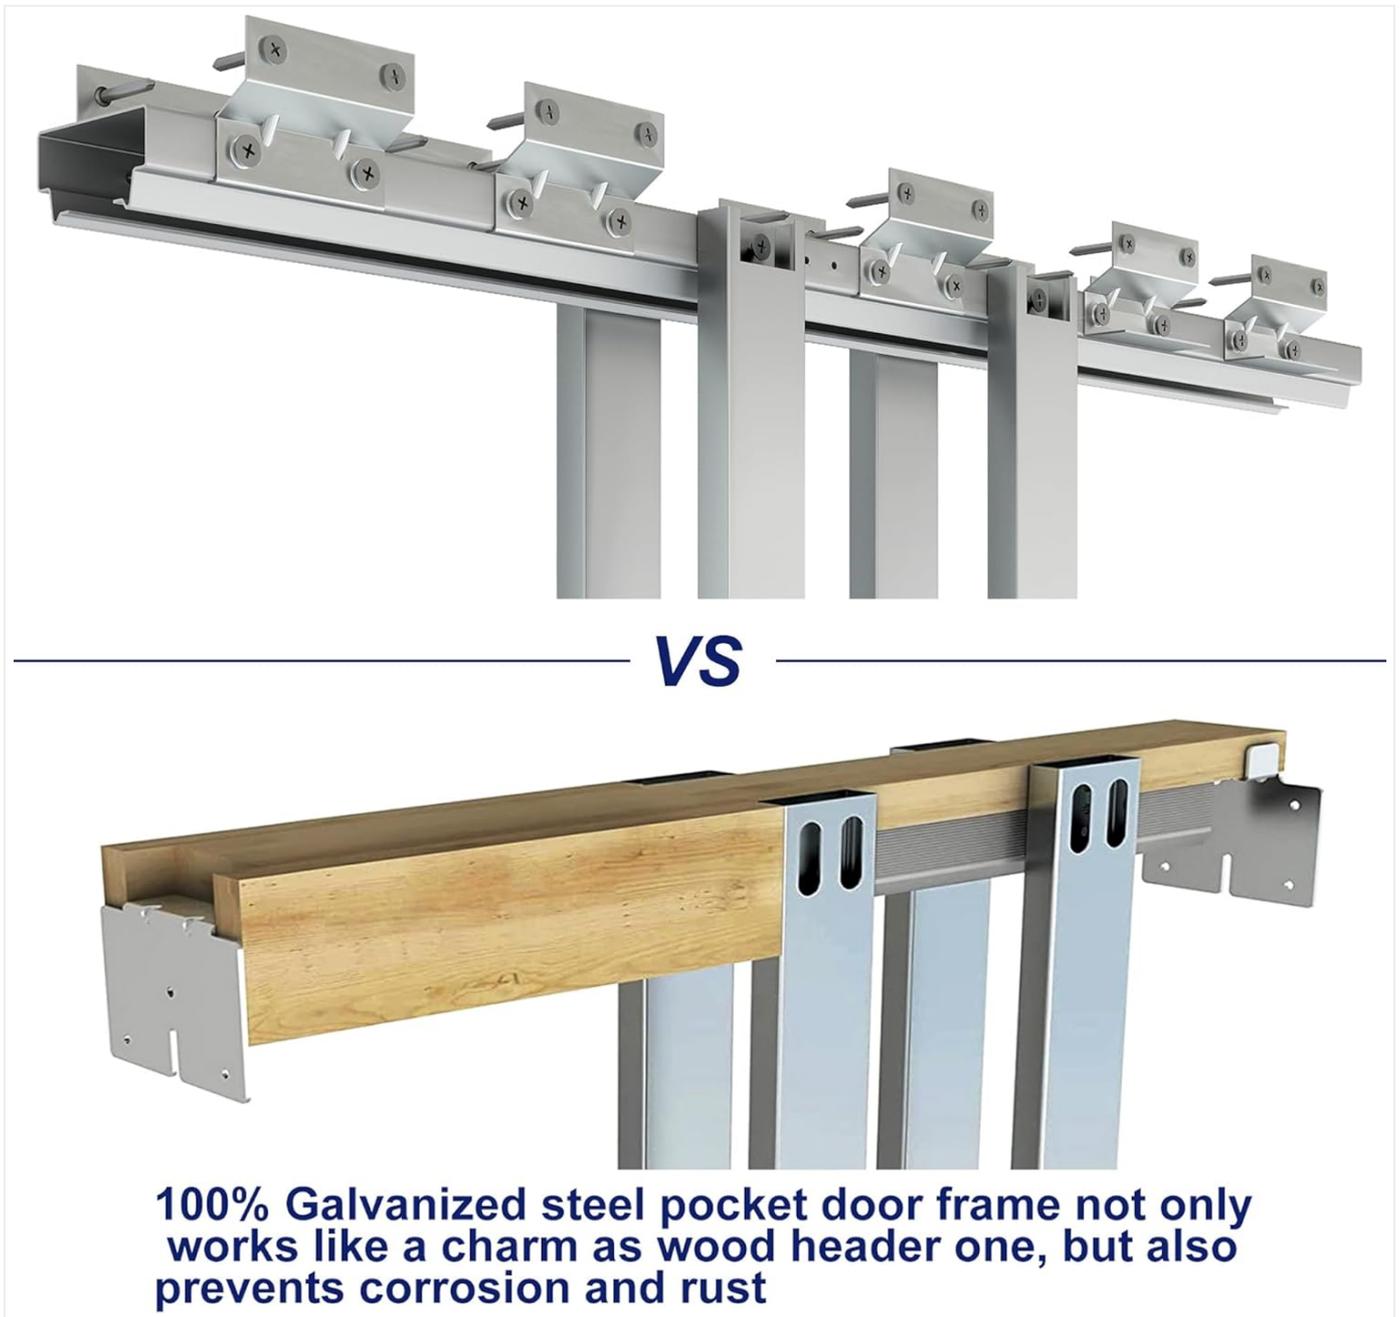


Image: Comparison image showing the JUBEST 100% galvanized steel pocket door frame (top) versus a traditional wood header frame (bottom), emphasizing the steel frame's corrosion and rust resistance.

## 5. INSTALLATION INSTRUCTIONS

Follow these steps carefully for proper installation of your JUBEST Pocket Door Frame Kit.

Your browser does not support the video tag.

Video: Official installation video for the JUBEST Steel Pocket Door Frame Kit, demonstrating the step-by-step process from rough opening construction to final door mounting and adjustment.

### Step 1: Construct Rough Opening

Prepare the wall framing for the pocket door. The rough opening height should be the door height plus 3 inches (76mm). The rough opening width should be 2 times the door width plus 1 inch (25mm).

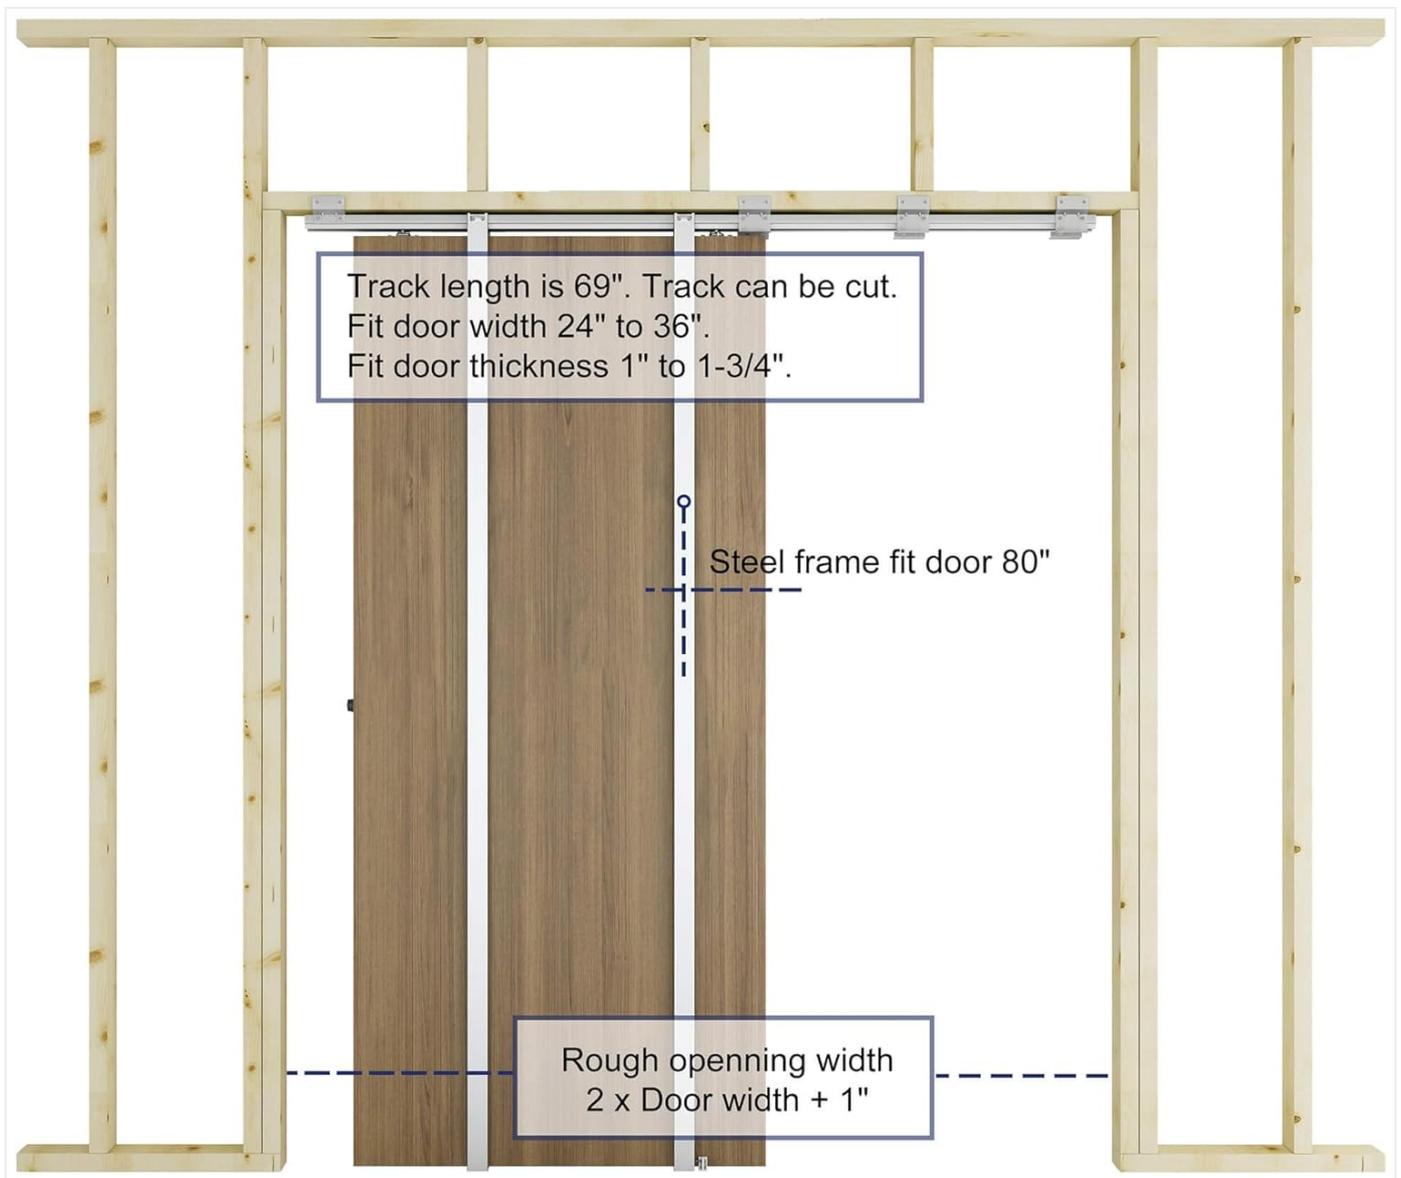


Image: Diagram illustrating the dimensions for the pocket door frame installation: track length 69 inches (can be cut), suitable for door width 24-36 inches, door height 80 inches, and door thickness 1-1.75 inches. Rough opening width is 2x door width + 1 inch.

## Step 2: Snap a Chalk Line

Snap a chalk line on the floor to mark the position for the floor brackets and guides. This ensures proper alignment of the door within the pocket.

## Step 3: Fix Mounting Plate

Attach the mounting plates to the steel track. Ensure they are securely fastened according to the provided hardware.

## Step 4: Fix Steel Track to Horizontal Wood Frame

Mount the steel track assembly to the horizontal wood header of your rough opening. Use the provided mounting brackets and ensure the track is perfectly level. The steel tube studs are then attached to the track and secured to the floor.

*Made of light duty galvanized steel,  
roll-formed and welded to increase rigidity*



Image: Close-up view of the light-duty galvanized steel track, showing its roll-formed and welded construction for increased rigidity.

### **Step 5: Fix Hanger Mounting Plate onto Top of Wood Door and Fasten the Bumper**

Install the hanger mounting plates onto the top edge of your wooden door. Position them carefully as indicated in the video. Also, fasten the bumper to the door edge at the specified location.

### **Step 6: Insert Hangers into Track Alternating Wheel and Mount Door**

Carefully insert the door hangers into the track, alternating the wheel direction as shown in the video. Once the hangers are in place, lift and mount the door onto the hangers. Adjust the door height using the spanner tool to ensure it hangs plumb and clears the floor.

### **Step 7: Fasten Guides on Finished Split Jambs**

After the door is mounted and adjusted, install the floor guides on the finished split jambs. These guides prevent the door from swinging and ensure smooth movement within the pocket. Ensure a 3/16 inch (5mm) gap on each side of the door for optimal operation.



Image: Rendered image of a fully installed JUBEST pocket door frame with a wooden door, demonstrating its integration into a room.

## 6. OPERATING INSTRUCTIONS

---

Your JUBEST Pocket Door Frame Kit is designed for smooth and quiet operation. To open or close the door, gently push or pull it along the track. The hangers are engineered to prevent the door from jumping off the track, ensuring reliable performance.

## 7. MAINTENANCE

---

Regular maintenance will ensure the longevity and smooth operation of your pocket door system.

- **Cleaning:** Periodically clean the track and rollers to remove dust and debris that may hinder smooth operation. Use a soft cloth and a mild cleaner.
- **Lubrication:** If the door's movement becomes stiff, apply a silicone-based lubricant to the rollers and inside the track. Avoid oil-based lubricants as they can attract dirt.

- **Inspection:** Annually inspect all fasteners and connections to ensure they remain tight. Re-tighten any loose screws.

## 8. TROUBLESHOOTING

---

If you encounter issues with your pocket door, refer to the following common problems and solutions:

- **Door is difficult to slide:** Check the track for debris and clean it thoroughly. Apply lubricant to the rollers and track. Ensure the door is properly aligned and not rubbing against the frame.
- **Door is not level:** Use the adjustment spanner on the door hangers to fine-tune the door's height and ensure it hangs plumb.
- **Door swings or wobbles:** Verify that the floor guides are securely fastened and properly positioned to maintain the correct gap on both sides of the door.
- **Noise during operation:** Clean and lubricate the track and rollers. Check for any loose components that might be causing rattling.

## 9. SPECIFICATIONS

---

<b>Brand</b>	JUBEST
<b>Model Number</b>	TSQAL03-6.6FT
<b>Material</b>	Alloy Steel
<b>Color</b>	Silver
<b>Item Weight</b>	23.5 Pounds
<b>Product Dimensions</b>	1.75 x 36 x 80 inches
<b>Max Track Length</b>	69 inches
<b>Suitable Door Width</b>	24"-36"
<b>Suitable Door Height</b>	80"
<b>Suitable Door Thickness</b>	1"-1.75"
<b>Maximum Loading Weight</b>	150 lbs
<b>Assembly Required</b>	Yes

## 10. WARRANTY AND SUPPORT

---

JUBEST products are manufactured to high-quality standards. For specific warranty details or technical support, please refer to the product packaging or contact JUBEST customer service directly. Keep your purchase receipt for warranty claims.

