



**XLC-60-KN Series  
60W Multiple Stage  
Constant Power LED  
Driver**



# MEAN WELL XLC-60-KN Series 60W Multiple Stage Constant Power LED Driver Owner's Manual

[Home](#) » [MEAN WELL](#) » MEAN WELL XLC-60-KN Series 60W Multiple Stage Constant Power LED Driver Owner's Manual 

## Contents

- [1 MEAN WELL XLC-60-KN Series 60W Multiple Stage Constant Power LED Driver](#)
- [2 Features](#)
- [3 Applications](#)
- [4 Description](#)
- [5 Model Encoding](#)
- [6 SPECIFICATION](#)
- [7 BLOCK DIAGRAM](#)
- [8 DIMMING OPERATION](#)
- [9 STATIC CHARACTERISTIC](#)
- [10 Installation Manual](#)
- [11 FAQ](#)
- [12 Documents / Resources](#)
  - [12.1 References](#)
- [13 Related Posts](#)



**MEAN WELL XLC-60-KN Series 60W Multiple Stage Constant Power LED Driver**



## Features

- Constant power mode output with multiple stage, selectable by ETS database
- Plastic housing with class II and PFC design
- Flicker-free, complying with CE ErP directive
- Standby power consumption <0.5W
- Meet emergency lighting (EL) application
- KNX/EIB protocol, support KNX data security
- Minimum dimming level 0.5%
- Functions: operation hours, power consumption feedback log/linear curve selection... etc
- 5 years warranty



## Applications

- Recessed Light
- Down Light
- Panel Light
- Commercial Lighting
- Decorative Lighting
- KNX digital Lighting

## GTIN CODE

- MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

## Description

- XLC-60-KN Series is a 60W with constant power output LED driver. It can operate from 100 ~ 305 VAC and output current ranging between 900mA to 1700mA selectable by ETS database and integration KNX interface to avoid using the complicated KNX-DALI gateway. Thanks to high efficiency up to 90%, it can operate for -25°C ~90°C case temperature under free air convection. XLC-60-KN is designed based on the latest safety regulations, so it provides more flexibility for LED Lighting applications.

## Model Encoding

**XLC - 60 - H - KN**  

Casing type: { Blank: without strain-relief (Built-in type)  
S: with strain-relief (Independent type)  
Function options (Built-in KNX interface)  
Rated output voltage (H-type)  
Rated wattage  
Series name

Type	Function	Note
KN	Built-in KNX interface, without strain-relief (Built-in type)	In stock
KNS	Built-in KNX interface, with strain-relief (Independent type)	In stock

## SPECIFICATION

MODEL		XLC-60-H-KN <span style="border: 1px solid black; padding: 0 5px;"> </span>
OUTPUT	OPEN CIRCUIT VOLTAGE <small>Note2</small>	60V
	DEFAULT CURRENT	900mA
	CURRENT ADJ. RANGE (BY ETS Database)	0.9~1.7A
	CONSTANT CURRENT REGION	9~54V
	RATED POWER <small>Note4</small>	60W
	CURRENT RIPPLE <small>Note5</small>	<4%
	CURRENT TOLERANCE	±5%
	DIMMING RANGE	0~100%
INPUT	SETUP,RISE TIME <small>Note6</small>	800ms,100ms/230VAC ,1000ms,100ms/115VAC
	VOLTAGE RANGE	100 ~ 305VAC    155 ~400VDC
	FREQUENCY RANGE	47 ~ 63Hz
	POWER FACTOR	PF ≥0.95/115VAC, PF ≥0.95/230VAC, PF ≥0.9/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)
	TOTAL HARMONIC DISTORTION	THD< 20%(@load ≥60%/230VAC; @load ≥75%/277VAC); THD<10%@load 100%/230VAC (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)
	EFFICIENCY(Typ.) <small>Note7</small>	90%
	AC CURRENT	0.75A/115VAC, 0.35A/230VAC, 0.3A/277VAC
	INRUSH CURRENT	COLD START 15A(twidth=310μs measured at 50% Ipeak) at 230VAC; Per NEMA 410
	MAX. NO. of PSUs on 16A CIRCUIT BREAKER	25 units (circuit breaker of type B) / 36 units (circuit breaker of type C) at 230VAC
	LEAKAGE CURRENT	<0.75mA/ 277VAC
PROTECTION	STANDBY POWER <small>Note8</small> CONSUMPTION	Standby power consumption<0.5W (Dimming off)
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed
	OVER TEMPERATURE	Stage 1: De-rating to 75% loading; Stage 2: De-rating to 50% loading. Recovers automatically after fault condition is removed.
FUNCTION	DIMMING	Please refer to 'DIMMING OPERATION' section
ENVIRONMENT	WORKING TEMP.	Tcase=-25~90℃ (Please refer to " OUTPUT LOAD vs TEMPERATURE" section)
	MAX. CASE TEMP.	Tcase=90℃
	WORKING HUMIDITY	20 ~ 90% RH non-condensing
	STORAGE TEMP., HUMIDITY	-40 ~ +80℃, 10 ~ 95% RH
	TEMP. COEFFICIENT	±0.03%/℃ (0 ~ 50℃)
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes


SAFETY&EMC	SAFETY STANDARDS	ENEC BS EN/EN61347-1, BS EN/EN61347-2-13(EL) appendix J suitable for emergency installations (DC input 176-280VDC); BS EN/EN62384, GB/T19510.1, GB/T19510.213, EAC TP TC 004 approved; Design refer to AS/NZS 61347-1, AS/NZS 61347-2-13		
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC		
	ISOLATION RESISTANCE	I/P-O/P:>100M Ohms / 500VDC / 25°C / 70% RH		
	EMC EMISSION	Parameter	Standard	Test Level/Note
		Conducted	BS EN/EN55015(CISPR15) ,GB/T 17743	-----
		Radiated	BS EN/EN55015(CISPR15) ,GB/T 17743	-----
		Harmonic Current	BS EN/EN61000-3-2, GB17625.1	Class C @load≥60%
		Voltage Flicker	BS EN/EN61000-3-3	-----
	EMC IMMUNITY	BS EN/EN61547		
		Parameter	Standard	Test Level/Note
		ESD	BS EN/EN61000-4-2	Level 3, 8KV air ; Level 2, 4KV contact
		Radiated	BS EN/EN61000-4-3	Level 2
		EFT/Burst	BS EN/EN61000-4-4	Level 2
		Surge	BS EN/EN61000-4-5	Level 3, 1KV/Line-Line
		Conducted	BS EN/EN61000-4-6	Level 2
		Magnetic Field	BS EN/EN61000-4-8	Level 2
		Voltage Dips and Interruptions	BS EN/EN61000-4-11	70% residual voltage for 10 period, 0% residual voltage for 0.5 periods
OTHERS	KNX	Certified protocol		
	FLICKER Note.9	PstLM ≤ 1, SVM ≤ 0.4		
	MTBF	4130.5K hrs min. Telcordia SR-332 (Bellcore) 317.7Khrs min. MIL-HDBK-217F (25°C)		
	DIMENSION	176*45*32mm , 136*45*32mm (L*W*H)		
	PACKING	0.28Kg; 40pcs/12.1Kg/0.48CUFT(for blank type); 0.31Kg; 40pcs/13.1Kg/0.61CUFT(for S-type)		

## NOTE

1. All parameters NOT specially mentioned are measured at 230VAC input, rated current, and 25 C of ambient temperature.
2. Output hiccups under no-load condition.
3. Please refer to “DRIVER METHODS OF LED MODULE”.
4. De-rating may be needed under low input voltages. Please refer to the “STATIC CHARACTERISTIC” sections for details.
5. The current ripple is measured at 50% ~ 100% of maximum voltage under rated power delivery.
6. The length of setup time is measured at first cold start. Turning ON/OFF the driver on or off may lead to an increase in the setup time.
7. Efficiency is measured at 1050mA/54V output set by ETS database.
8. Standby power consumption is measured at 230V AC.
9. Flicker is measured at full load with the light source provided by MEAN WELL.
10. The driver is considered as a component that will be operated in combination with the final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. (as available on [https://www.meanwell.com//Upload/PDF/EMI\\_statement\\_en.pdf](https://www.meanwell.com//Upload/PDF/EMI_statement_en.pdf))
11. For the XLC-S series: RCM is on a voluntary basis. Non-IC classification Independent LED control gear is not suitable for residential installations. For the XLC(except -S) series: RCM is on a voluntary basis and meets relevant IEC or AS/NZS standards, complying with AS/NZS 4417.1.
12. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).
13. This series meets the typical life expectancy of 50000 hours of operation when Tcase, particularly to point (or TMP, per DLC), is about 75 C or less.
14. For more information, please contact MEAN WELL sales.

\* Product Liability Disclaimer: For detailed information, please refer to <https://www.meanwell.com/serviceDisclaimer.asp>


## BLOCK DIAGRAM

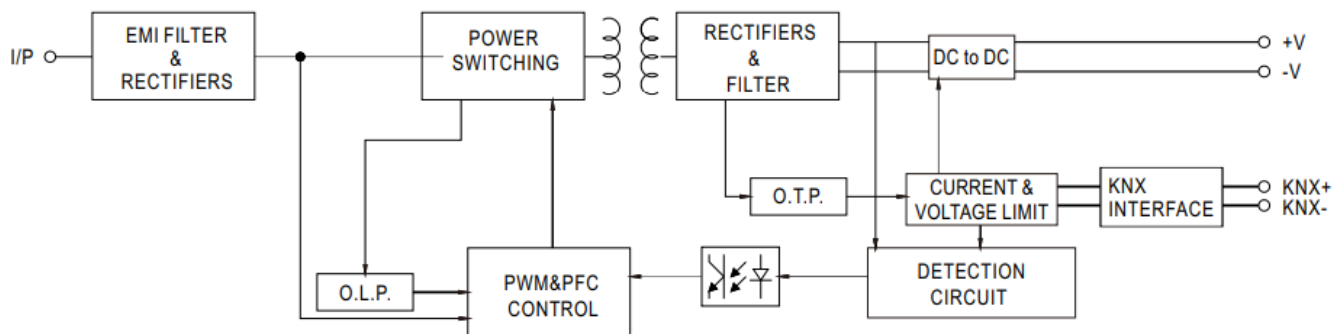

## DRIVING METHODS OF LED MODULES

### © XLC-60-H-KN

For 60W application

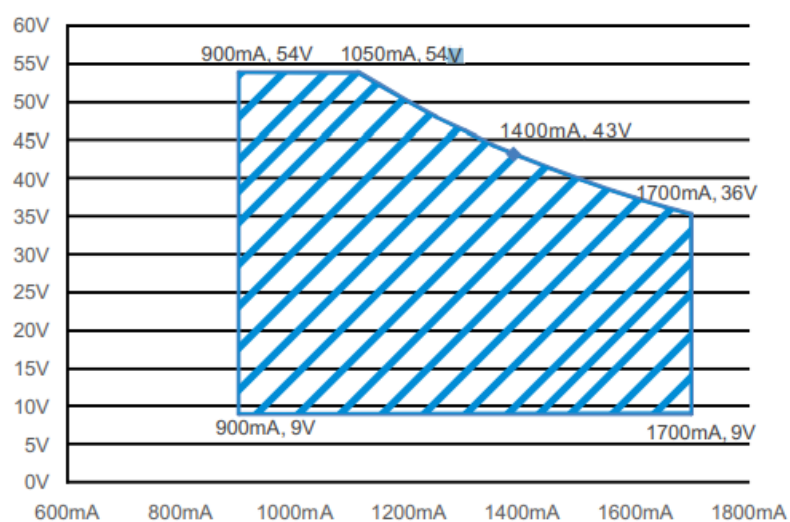

## CONSTANT POWER TABLE

XLC-60-KN is a multiple-stage constant power driver, selection of output current through Database.

Vo	Io	Vo	Io
9~54V	900mA(Default)	9~45V	1350mA
9~54V	950mA	9~43V	1400mA
9~54V	1000mA	9~41V	1450mA
9~54V	1050mA	9~40V	1500mA
9~54V	1100mA	9~39V	1550mA
9~52V	1150mA	9~38V	1600mA
9~50V	1200mA	9~37V	1650mA
9~48V	1250mA	9~36V	1700mA
9~46V	1300mA		

## DIMMING OPERATION


### KNX interface

- Apply KNX Bus cable between KNX+ and KNX-
- The application program(database) can be downloaded via Online Catalogs from ETS or via <http://www.meanwell.com/productCatalog.aspx>

Parametrization options	Description
Device Setting	<ul style="list-style-type: none"> <li>• Select current level</li> <li>• Select model</li> <li>• Behavior bus power up</li> </ul>


Parameter Setting	<ul style="list-style-type: none"> <li>• Basic Setting</li> <li>• Normal dimmer, staircase light</li> <li>• Switch function</li> <li>•relative dimming function</li> <li>• Absolution dimming function</li> <li>• Feedback Setting</li> <li>• Dimming value report</li> <li>•on/off state report</li> <li>• Lamp failure report</li> <li>• Lock function</li> </ul>
Scenes	<ul style="list-style-type: none"> <li>• Learn scene</li> <li>• scene1~scene32</li> </ul>
Automatic function	<ul style="list-style-type: none"> <li>• Automatic function1~4</li> </ul>
operating hours	<ul style="list-style-type: none"> <li>• Counting of operating hours</li> <li>• Constant light output(CLO)</li> <li>• Lifetime pre-warning</li> </ul>
Power consumption	<ul style="list-style-type: none"> <li>• Voltage, current, and power feedback</li> <li>• Energy consumption feedback</li> </ul>
Temperature Measurement	<ul style="list-style-type: none"> <li>• customize the alarm temperature</li> <li>• Send temperature report cyclically</li> </ul>
Auto-dimming over time	<ul style="list-style-type: none"> <li>• Optional gradient dimming</li> </ul>
Correction characteristic	<ul style="list-style-type: none"> <li>• Correction by lux measured value(lux)</li> </ul>
Push Dim Port	<ul style="list-style-type: none"> <li>• Push dim</li> <li>• AC monitor</li> </ul>

## CONSTANT LIGHT OUTPUT

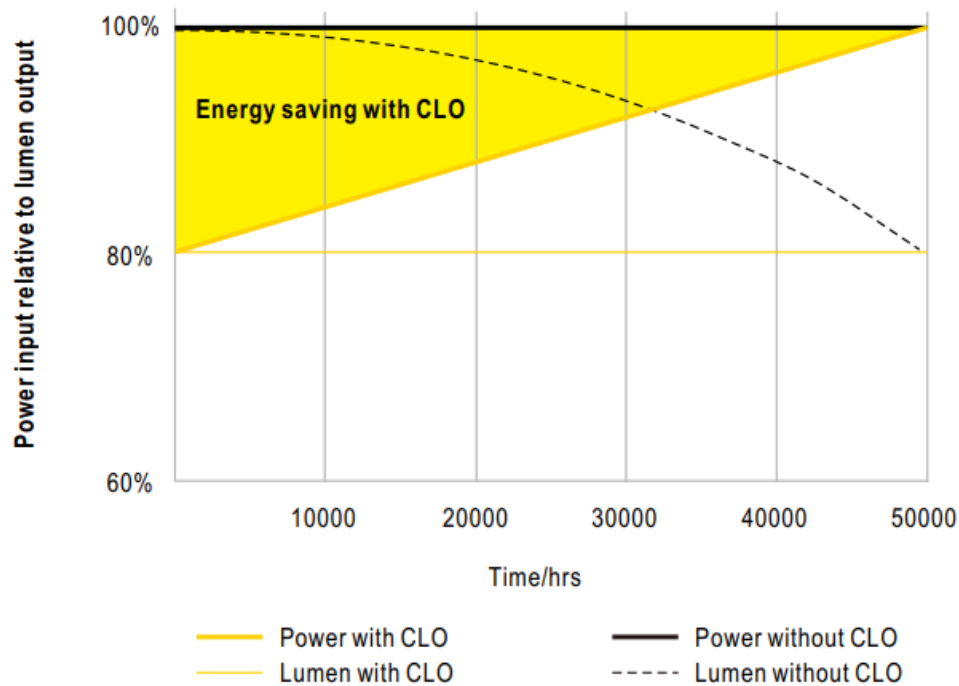

### PUSH dimming or AC/DC input monitor(Primary side)


- PUSH dimming

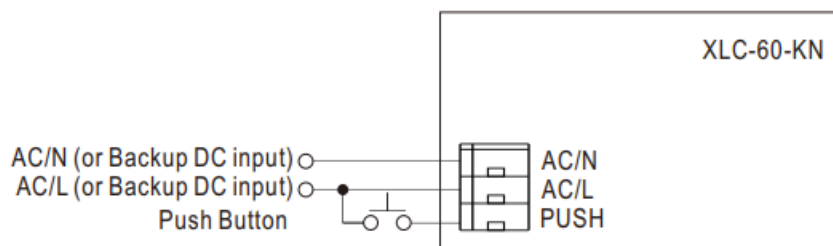

- KNX bus needs to be connected when using PUSH Dimming
- For the detailed function of PUSH dimming, please refer to the database.
- The maximum length of the cable between the push button and driver is 20 meters.
- The mechanical push button can be connected only between the PUSH terminal, as displayed in the diagram, and AC/L (in brown or black); It will not function properly if it is connected to AC/N.
- In case the PUSH dimming is set locally, up to 10 drivers can perform the PUSH dimming at the same time when utilizing one common push button.
- In case the PUSH dimming is set independently via ETS, the number of drivers is done through group address and determined by the ETS project designer.



### AC/DC input monitor



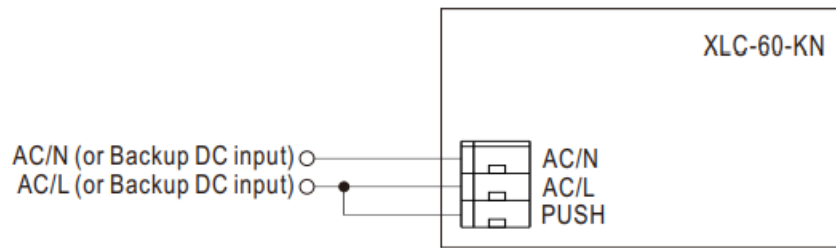


- KNX bus needs to be connected when using the AC/DC input monitor
- For the detailed function of the AC/DC input monitor(emergency lighting), please refer to the database and instruction manual.


## OUTPUT LOAD vs TEMPERATURE

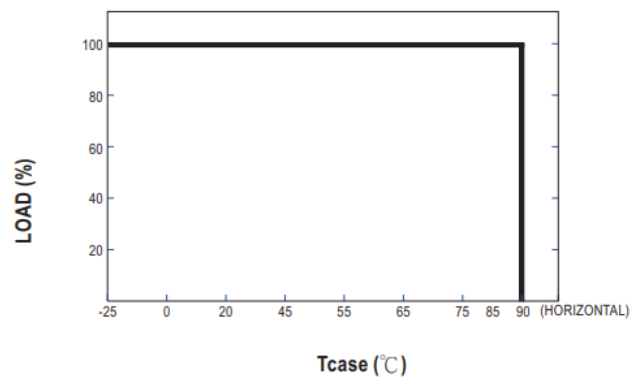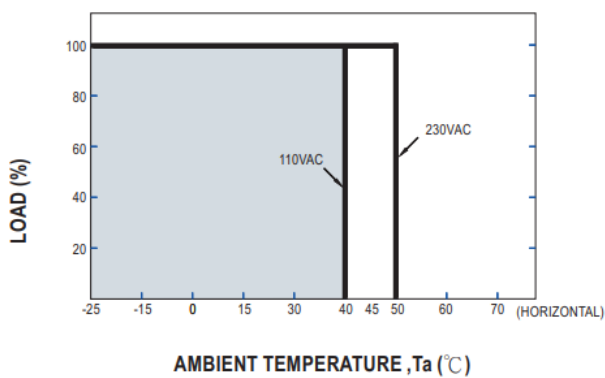

## STATIC CHARACTERISTIC


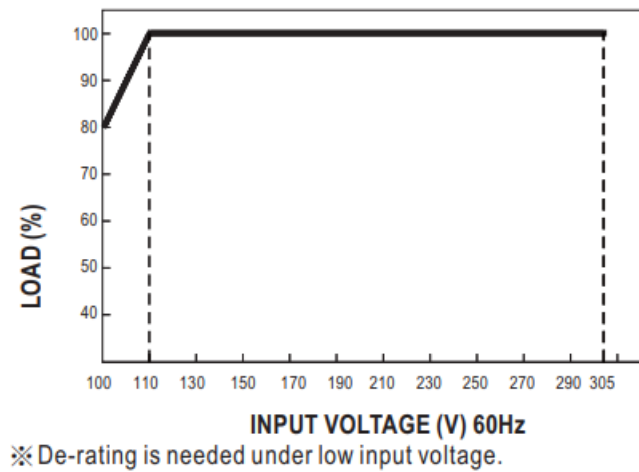


## LIFE TIME

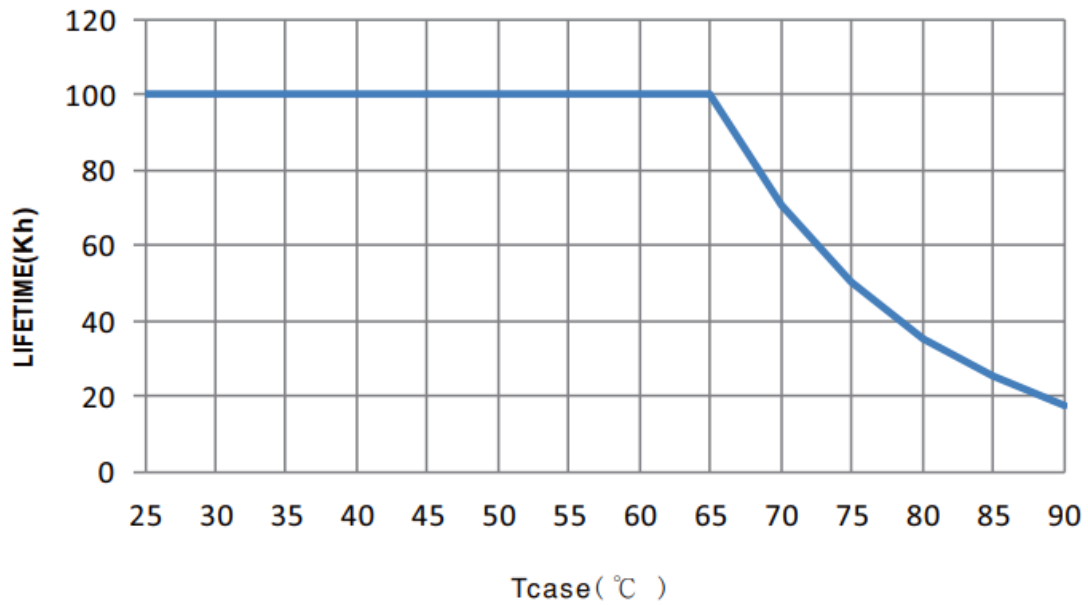



## TOTAL HARMONIC DISTORTION (THD)

※ XLC-60-H-KN Model, Tcase at 75°C

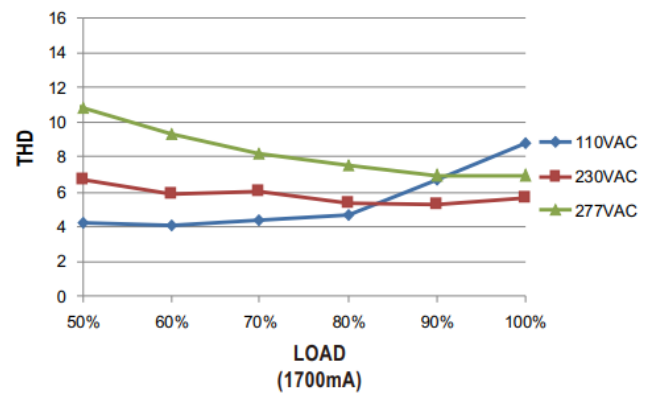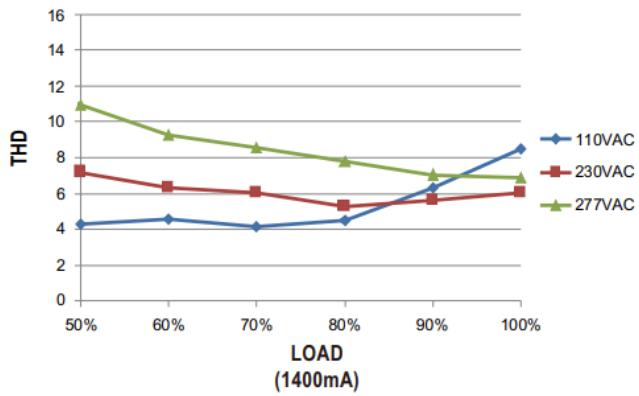


## POWER FACTOR (PF) CHARACTERISTIC

XLC-60-H-KN Model, Tcase at 75°C

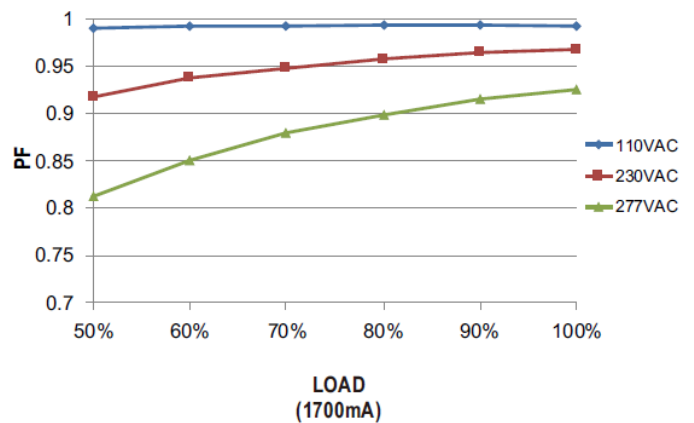
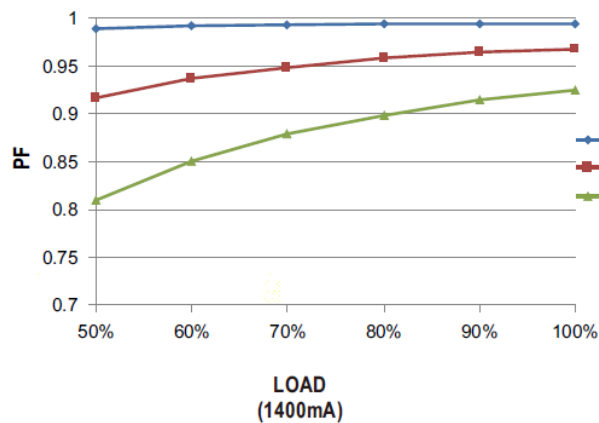



## EFFICIENCY vs LOAD

XLC-60-KN series possess superior working efficiency that up to 90% can be reached in field applications.

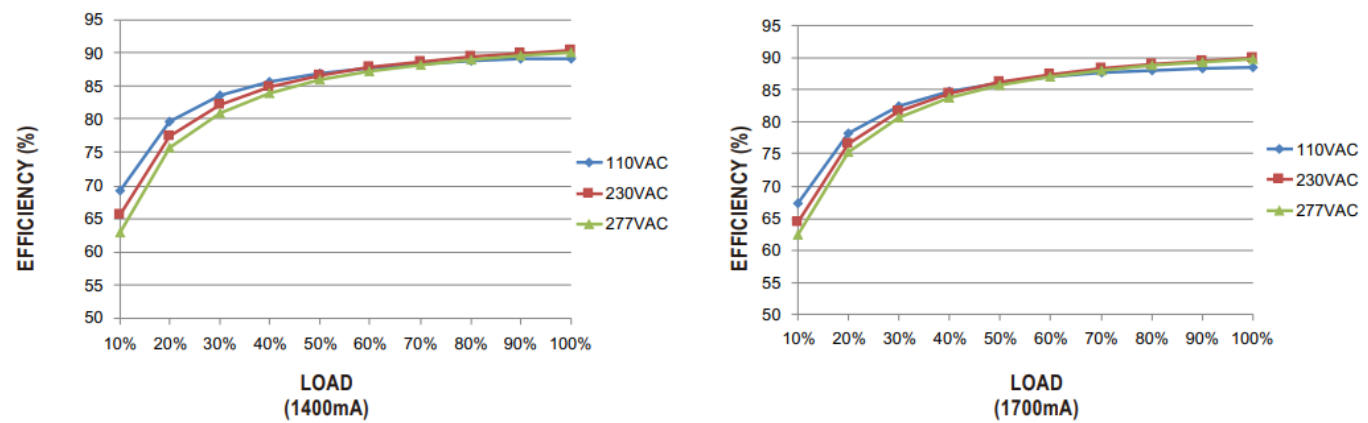

MECHANICAL SPECIFICATION

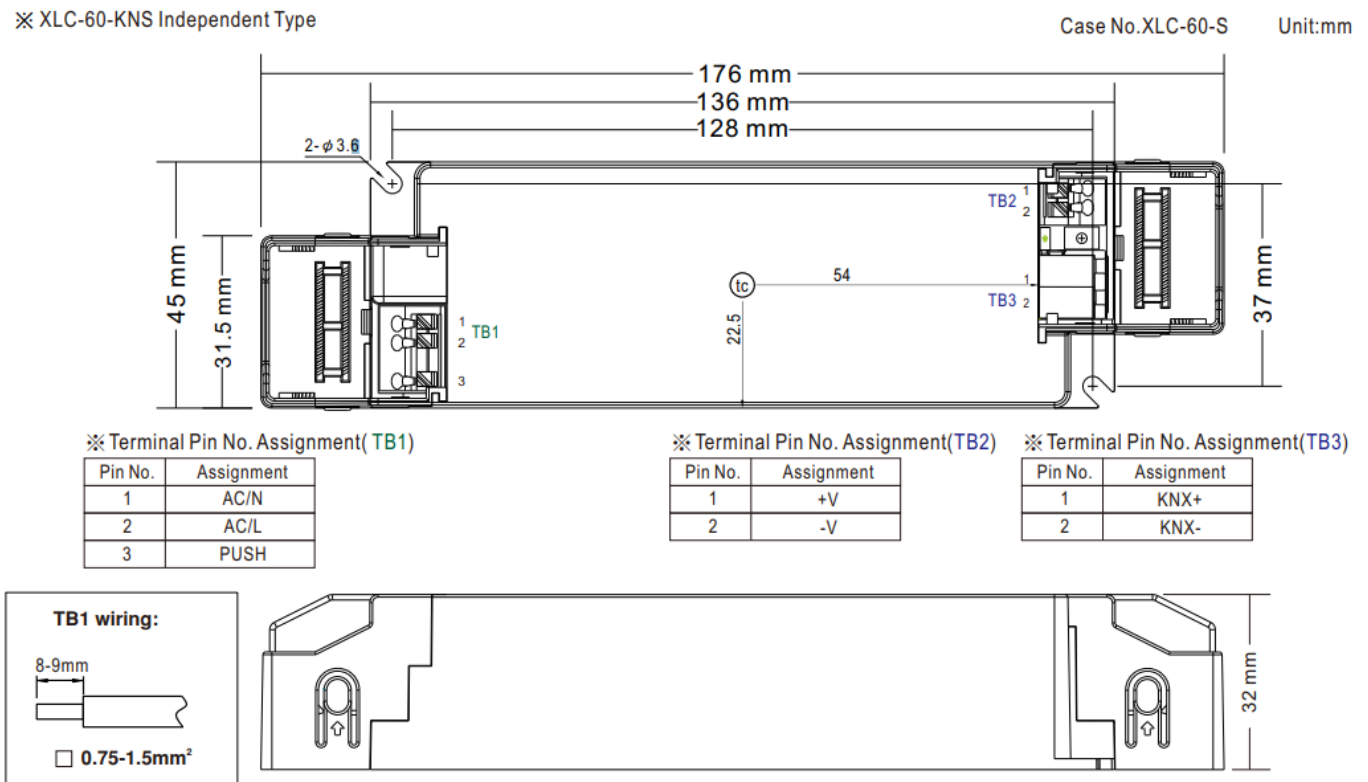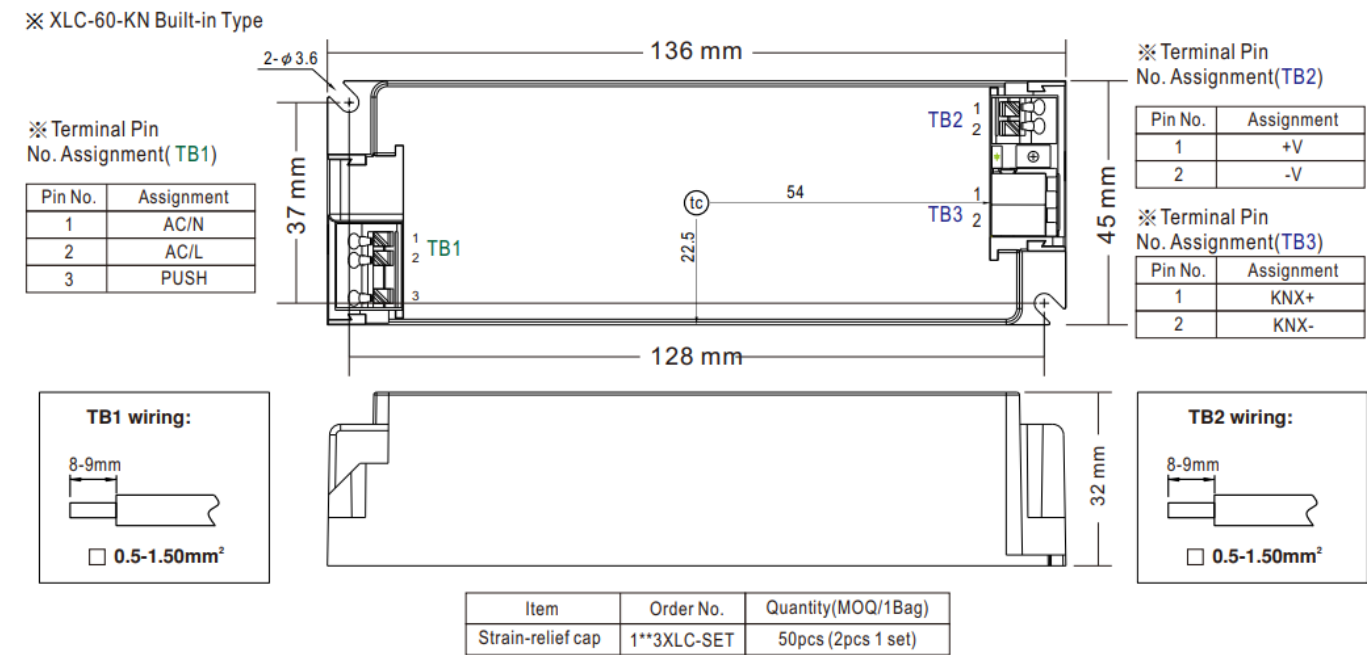



## Installation Manual

- Please refer to: <http://www.meanwell.com/manual.html>



## FAQ

- **Q:** What is the maximum power factor of the LED driver?
- **A:** The LED driver has a power factor of [insert power factor value here].
- **Q:** How many LED drivers can be connected to a 16A circuit breaker?
- **A:** The maximum number of LED drivers that can be connected to a 16A circuit breaker is [insert number here].

## Documents / Resources

	<p><a href="#">MEAN WELL XLC-60-KN Series 60W Multiple Stage Constant Power LED Driver</a> [pdf] Owner's Manual</p> <p>XLC-60-KN, XLC-60-H-KN, XLC-60-KN Series 60W Multiple Stage Constant Power LED Driver, XLC-60-KN Series, 60W Multiple Stage Constant Power LED Driver</p>
--	--

## References

- [User Manual](#)

[Manuals+.](#) [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.