



**XLN-40-12 40W
Multiple Stage
Constant Power
Constant Voltage
LED Driver**



MEAN WELL XLN-40-12 40W Multiple Stage Constant Power Constant Voltage LED Driver Owner's Manual

[Home](#) » [MEAN WELL](#) » MEAN WELL XLN-40-12 40W Multiple Stage Constant Power Constant Voltage LED Driver Owner's Manual 

Contents

- 1 MEAN WELL XLN-40-12 40W Multiple Stage Constant Power Constant Voltage LED Driver
- 2 Product Usage Instructions
- 3 FAQ
- 4 Features
- 5 Applications
- 6 Description
- 7 Specification
- 8 BLOCK DIAGRAM
- 9 DRIVING METHODS OF LED MODULE
- 10 DIMMING OPERATION
- 11 STATIC CHARACTERISTIC
- 12 MECHANICAL SPECIFICATION
- 13 Documents / Resources
 - 13.1 References



MEAN WELL XLN-40-12 40W Multiple Stage Constant Power Constant Voltage LED Driver



Specifications:

- Product Name: 40W Multiple-Stage Constant Power/Constant Voltage LED Driver
- Model: XLN-40 series
- Type: Independent type
- Certification: CLASS P LED DRIVER, 4HB3 E334687, Type HL
- Input: DC 176-280VDC
- Output: Constant power mode with multiple stage selectable by NFC setting (H-type), Constant voltage mode output (12V/24V)
- Housing: Plastic housing with Class II and PFC design
- Safety Compliance: UL 8750 Class 2 / Class P power unit
- Additional Features: Flicker free, CE ErP directive compliant, Standby power consumption

Product Usage Instructions

Installation:

Ensure the input power matches the specified range (176-280VDC). Connect the LED driver according to the provided wiring diagram.

Setting Output Mode:

- Constant Power Mode: Use NFC setting to select the desired multiple-stage output.
- Constant Voltage Mode: Select 12V or 24V output based on your LED requirements.

Safety Precautions:


Follow all safety guidelines mentioned in the user manual to prevent electric shock or damage to the product.

FAQ

- **Q: Can this LED driver be used for outdoor applications?**
 - A: The product is designed for indoor use only. For outdoor applications, ensure proper weatherproofing.
- **Q: How can I troubleshoot flickering issues with the LED driver?**
 - A: Check the input power stability and connections. If flickering persists, contact customer support for

further assistance.

Symbol

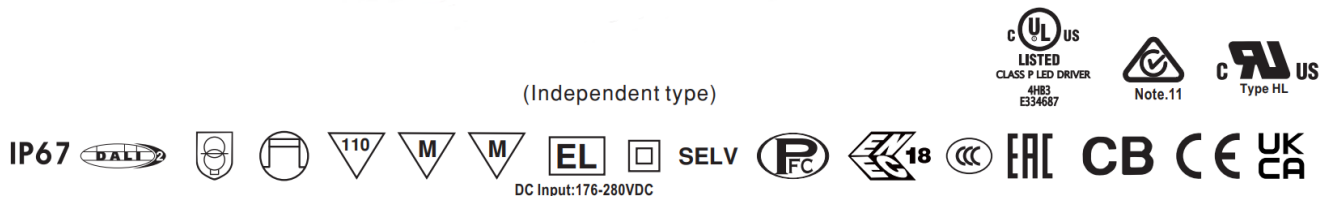

Features

- Constant power mode output with multiple stage selectable by NFC setting (H-type)
- Constant voltage mode output(12V/24V)
- Plastic housing with class II and PFC design
- Meet UL 8750 Class 2 / Class P power unit
- Flicker free, complying with CE ErP directive
- Standby power consumption <0.5W
- Meet emergency lighting (EL) function application
- Fully encapsulated with IP67
- Minimum dimming level 0.1% (DALI-2 DT6)
- Dimming functions: 3 in 1 dimming (Dim-to-off) DALI-2 + Push dimming
- 5 years warranty

Applications

- Recessed Light
- Down Light
- Panel Light
- Commercial Lighting
- Decorative Lighting
- LED strip lighting
- DALI digital Lighting

GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

Description

XLN-40 Series is a 40W with constant power and constant voltage output LED driver. It can operate from 100~305VAC and output current ranging between 600 mA to 1400 mA selectable by NFC setting. Thanks to high efficiency up to 88%, it is able to operate for -25 C ~90 C case temperature under free air convection. XLN-40 is designed based on the latest safety regulations with 3 in 1 and DALI-2 dimming. XLN-40 can also be adjusted for brightness with a push button as a simple way dimming, so it provides more flexibility for LED Lighting applications.

Model Encoding

XLN - 40 - H -

Function options (Blank/B/DA2)
Rated output voltage (12V/24V or H-type)
Rated wattage
Series name

Type	Function	Note
Blank	H type output current selectable by NFC setting with constant power mode	In stock
	12, 24V Constant voltage output	
B	H type output current selectable by NFC setting and built in 3 in 1 dimming	
DA2	H type output current selectable by NFC setting and built in DALI-2 dimming	

Note:

- 12V/24V output is fixed without NFC function and Dimming.
- For more current setting, please contact MW sales representative.

Specification

40W Constant Voltage LED Driver

MODEL		XLN-40-12	XLN-40-24
OUTPUT	RATED VOLTAGE	12V	24V
	RATED CURRENT	3.4A	1.7A
	RATED POWER <small>Note.2</small>	40.8W	40.8W
	RIPPLE & NOISE (max.) <small>Note.3</small>	120mVp-p	240mVp-p
	VOLTAGE TOLERANCE <small>Note.4</small>	±4.0%	
	LINE REGULATION	±0.5%	
	LOAD REGULATION	±2%	
	SETUP, RISE TIME <small>Note.5</small>	500ms, 100ms/230VAC, 1000ms, 100ms/115VAC	
INPUT	VOLTAGE RANGE	100 ~ 305VAC 141 ~ 400VDC	
	FREQUENCY RANGE	47 ~ 63Hz	
	POWER FACTOR	PF ≥ 0.97/115VAC, PF ≥ 0.95/230VAC, PF ≥ 0.92/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)	
	TOTAL HARMONIC DISTORTION	THD<10%(@load ≥ 50%/230VAC; @load ≥ 75%/277VAC), THD<15%(@load ≥ 50%/115VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)	
	EFFICIENCY (Typ.)	86%	88%
	AC CURRENT	0.5A / 115VAC 0.25A / 230VAC 0.2A/277VAC	
	INRUSH CURRENT(Typ.)	COLD START 10A(twidth=100μs measured at 50% Ipeak) at 230VAC; Per NEMA 410	
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	51 units (circuit breaker of type B) / 51 units (circuit breaker of type C) at 230VAC	
OVER LOAD	LEAKAGE CURRENT	<0.75mA / 277VAC	
		105 ~ 220% rated output power Protection type:Hiccup mode , recovers automatically after fault condition is removed	

PROTECTION	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed		
	OVER VOLTAGE	13 ~ 16V	26 ~ 32V	
		Shut down and latch off o/p voltage, re-power on to recover		
	OVER TEMPERATURE	Shut down output voltage, recovers automatically after fault condition is removed		
ENVIRONMENT	WORKING TEMP.	Tcase=-25 ~ 90℃ (Please refer to " OUTPUT LOAD vs TEMPERATURE" section)		
	MAX. CASE TEMP.	Tcase=90℃		
	WORKING HUMIDITY	20 ~ 90% RH non-condensing		
	STORAGE TEMP., HUMIDITY	-40 ~ +80℃, 10 ~ 95% RH		
	TEMP. COEFFICIENT	±0.03%/℃ (0 ~ 50℃)		
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes		
	SAFETY & EMC	SAFETY STANDARDS	ENEC BS EN/EN61347-1, BS EN/EN61347-2-13(EL) appendix J suitable for emergency installations(DC input 176-280VDC); BS EN/EN62384, GB19510.14, GB19510.1, EAC TP TC 004,UL8750(Type HL and Class P); CSA C22.2 No. 250.13-12 approved; Design refer to AS/NZS 61347-1, AS/NZS 61347-2-13;	
WITHSTAND VOLTAGE		I/P-O/P:3.75KVAC		
ISOLATION RESISTANCE		I/P-O/P:>100M Ohms / 500VDC / 25℃ / 70% RH		
EMC EMISSION		Parameter	Standard	Test Level/Note
		Conducted	BS EN/EN55015(CISPR15) ,GB/T 17743	-----
		Radiated	BS EN/EN55015(CISPR15) ,GB/T 17743	-----
		Harmonic Current	BS EN/EN61000-3-2 , GB17625.1	Class C @load≥50%
		Voltage Flicker	BS EN/EN61000-3-3	-----
EMC IMMUNITY		BS EN/EN61547		
		Parameter	Standard	Test Level/Note
		ESD	BS EN/EN61000-4-2	Level 3, 8KV air ; Level 2, 4KV contact
		Radiated	BS EN/EN61000-4-3	Level 2
		EFT/Burst	BS EN/EN61000-4-4	Level 2
		Surge	BS EN/EN61000-4-5	Level 3, 1KV/Line-Line
		Conducted	BS EN/EN61000-4-6	Level 2
		Magnetic Field	BS EN/EN61000-4-8	Level 2
		Voltage Dips and Interruptions	BS EN/EN61000-4-11	70% residual voltage for 10 period, 0% residual voltage for 0.5 periods
	OTHERS	FLICKER	Note.6	PstLM ≤ 1, SVM ≤ 0.4
MTBF		3935.2 K hrs min. Telcordia SR-332 (Bellcore) ; 342.9 Khrs min. MIL-HDBK-217F (25℃)		
DIMENSION		114*44*32mm (L*W*H)		
PACKING		308g; 40pcs/13.32Kg/0.95CUFT		
NOTE	<div>1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25℃ of ambient temperature.</div> <div>2. De-rating may be need under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.</div> <div>3. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor.</div> <div>4. Tolerance: includes set up tolerance, line regulation and load regulation.</div> <div>5. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.</div> <div>6. Flicker is measured at full load with the light source provided by MEAN WELL.</div> <div>7. To fulfill requirement of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently connected to the mains.</div> <div>8. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf)</div> <div>9. The ambient temperature de-rating of 3.5℃/1000m with fanless models and 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft).</div> <div>10. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (Tc) point (or TMP, per DLC), is about 75℃ or less.</div> <div>11. RCM is on a voluntary basis. Non IC classification Independent LED control gear is not suitable for residential installations.</div> <div>12. Products sourced from the Americas regions may not have the CCC/PSE/BIS/KC logo. Please contact your MEAN WELL sales for more information.</div> <div>13. For more information, please contact with MEAN WELL sales.</div> <div>※Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx</div>			

- <https://www.meanwell.com/serviceDisclaimer.aspx>

40W Multiple-Stage Constant Power LED Driver

MODEL		XLN-40-H- <input type="checkbox"/>	
OUTPUT	OPEN CIRCUIT VOLTAGE	Note.2	60V
	DEFAULT CURRENT		1050mA
	CURRENT ADJ. RANGE (BY NFC)		0.6~1.4A
	CONSTANT CURRENT REGION	Note.3	9~54V
	RATED POWER	Note.4	40W
	CURRENT RIPPLE		<4%(@full load)
	CURRENT TOLERANCE		±5%
	DIMMING RANGE		0~100%
	SETUP, RISE TIME	Note.5,6	500ms, 100ms/230VAC, 1000ms, 100ms/115VAC
INPUT	VOLTAGE RANGE		100 ~ 305VAC 141 ~ 400VDC
	FREQUENCY RANGE		47 ~ 63Hz
	POWER FACTOR		PF ≥ 0.97/115VAC, PF ≥ 0.95/230VAC, PF ≥ 0.92/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)
	TOTAL HARMONIC DISTORTION		THD<10%(@load ≥ 50%/230VAC; @load ≥ 75%/277VAC), THD<15%(@load ≥ 50%/115VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)
	EFFICIENCY (Typ.)	Note.7	88%
	AC CURRENT		0.5A / 115VAC 0.25A / 230VAC 0.2A/277VAC
	INRUSH CURRENT(Typ.)		COLD START 10A(twidth=100μs measured at 50% Ipeak) at 230VAC; Per NEMA 410
	MAX. No. of PSUs on 16A CIRCUIT BREAKER		51 units (circuit breaker of type B) / 51 units (circuit breaker of type C) at 230VAC
	LEAKAGE CURRENT		<0.75mA / 277VAC
	STANDBY POWER CONSUMPTION	Note.8	Standby power consumption<0.5W(Dimming off)
PROTECTION	SHORT CIRCUIT		Hiccup mode, recovers automatically after fault condition is removed
	OVER TEMPERATURE		Blank & B type: De-rating to lowest output level. Recovers automatically after fault condition is removed. DA2 type: Stage 1: De-rating to 75% loading; Stage 2: De-rating to 50% loading. Recovers automatically after fault condition is removed.
ENVIRONMENT	WORKING TEMP.		Tcase=-25 ~ 90℃ (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)
	MAX. CASE TEMP.		Tcase=90℃
	WORKING HUMIDITY		20 ~ 90% RH non-condensing
	STORAGE TEMP., HUMIDITY		-40 ~ +80℃, 10 ~ 95% RH
	TEMP. COEFFICIENT		±0.03%/℃ (0 ~ 50℃)
	VIBRATION		10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes
SAFETY & EMC	SAFETY STANDARDS		ENEC BS EN/EN61347-1, BS EN/EN61347-2-13(EL) appendix J suitable for emergency installations(DC input 176-280VDC); BS EN/EN62384, GB19510.14, GB19510.1, EAC TP TC 004,UL8750(Type HL and Class P); CSA C22.2 No. 250.13-12 approved; Design refer to AS/NZS 61347-1, AS/NZS 61347-2-13;
	DALI STANDARDS		Comply with IEC62386-101,102,207
	WITHSTAND VOLTAGE		I/P-O/P:3.75KVAC
	ISOLATION RESISTANCE		I/P-O/P:>100M Ohms / 500VDC / 25℃ / 70% RH
	EMC EMISSION	Parameter	Standard
		Conducted	BS EN/EN55015(CISPR15) ,GB/T 17743
		Radiated	BS EN/EN55015(CISPR15) ,GB/T 17743
		Harmonic Current	BS EN/EN61000-3-2 , GB17625.1
	EMC IMMUNITY	Voltage Flicker	BS EN/EN61000-3-3
		BS EN/EN61547	
		Parameter	Standard
		ESD	BS EN/EN61000-4-2
		Radiated	BS EN/EN61000-4-3
		EFT/Burst	BS EN/EN61000-4-4
		Surge	BS EN/EN61000-4-5
		Conducted	BS EN/EN61000-4-6
		Magnetic Field	BS EN/EN61000-4-8
		Voltage Dips and Interruptions	BS EN/EN61000-4-11
OTHERS	FLICKER	Note.9	PstLM ≤ 1, SVM ≤ 0.4
	MTBF		3935.2 K hrs min. Telcordia SR-332 (Bellcore); 342.9 Khrs min. MIL-HDBK-217F (25℃)
	DIMENSION		114*44*32mm (L*W*H)
	PACKING		311g; 40pcs/13.44Kg/0.95CUFT

NOTE

1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25 C of ambient temperature.
2. Output hiccups under no-load condition.
3. Please refer to "DRIVER METHODS OF LED MODULE".
4. De-rating may be needed under low input voltages. Please refer to the "STATIC CHARACTERISTIC" sections for details.
5. The length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to an increase of

the set up time.


6. Based on IEC 62386-101/102 DALI power on timing and interruption regulations, the setup time needs to test with a DALI controller which can support for DALI power on function, otherwise, the startup time will be higher than 0.5 seconds.
7. Efficiency is measured at 800mA/50V by NFC.
8. Standby power consumption is measured at 230VAC.
9. Flicker is measured at full load with the light source provided by MEAN WELL.
10. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify the EMC Directive on the complete installation again. (as available on https://www.meanwell.com//Upload/PDF/EMI_statement_en.pdf)
11. RCM is on a voluntary basis. Non-IC classification Independent LED control gear is not suitable for residential installations.
12. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (tc) point (or TMP, per DLC), is about 75°C or less.
13. The ambient temperature de-rating of 3.5°C/1000m with fanless models and 5°C/1000m with fan models for operating altitudes higher than 2000m(6500ft).
14. To fulfill the requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without being permanently connected to the mains.
15. Products sourced from the Americas regions may not have the CCC/PSE/BIS/KC logo. Please contact your MEAN WELL sales for more information.
16. For more information, please contact MEAN WELL sales.

*Product Liability Disclaimer: For detailed information, please refer to

<https://www.meanwell.com/serviceDisclaimer.aspx>

40W Multiple-Stage Constant Power/Constant Voltage LED Driver

BLOCK DIAGRAM

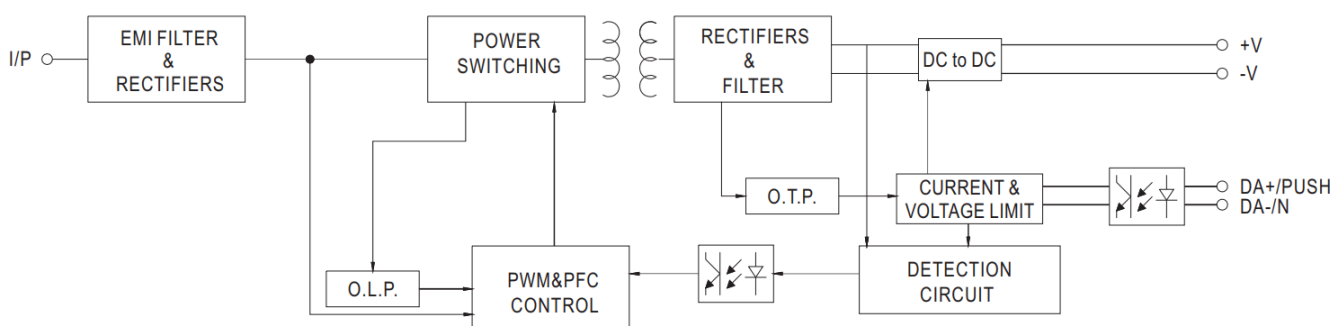


DRIVING METHODS OF LED MODULE

※ I-V Operating Area

◎ XLN-40-H

For 40W application

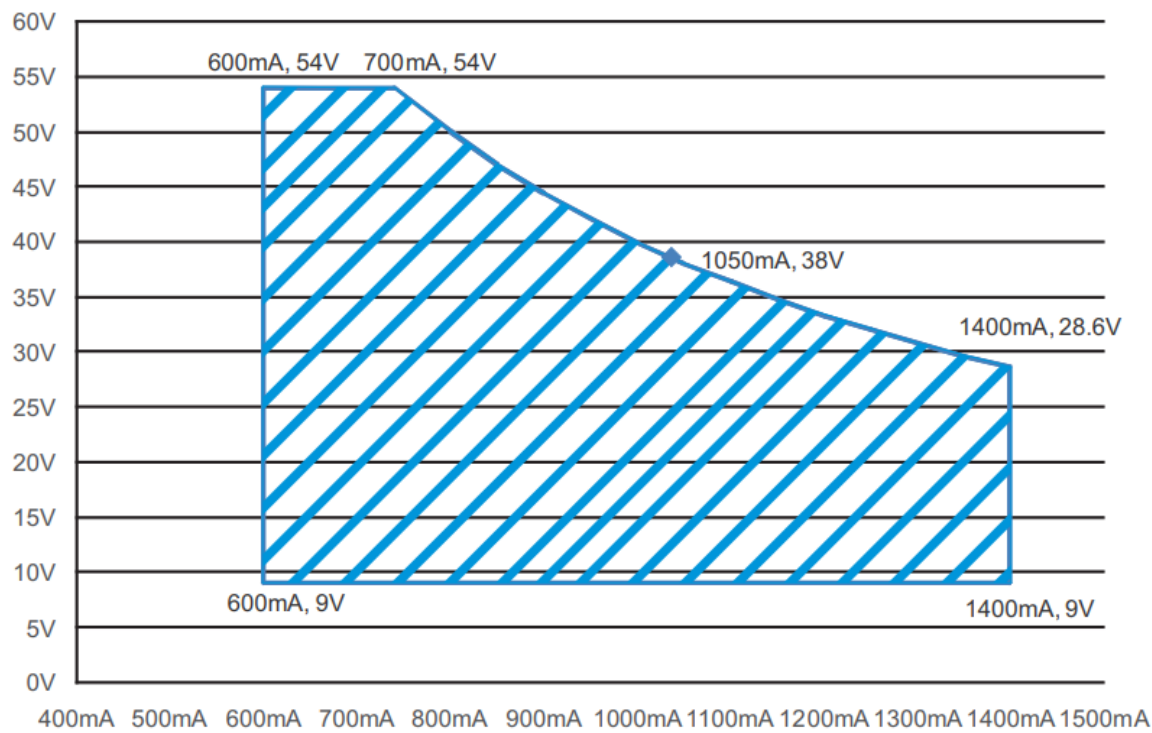

CONSTANT POWER TABLE

XLN-40-H is a multiple-stage constant power driver, selection of output current through NFC setting is exhibited below.

V_o	I_o
9~54V	600mA
9~54V	700mA
9~50V	800mA
9~45V	900mA
9~38V	1050mA(default)
9~33V	1200mA
9~31V	1300mA
9~29V	1400mA

Note: 1. The operating voltage range shown on this table is recommended to use.

40W Multiple-Stage Constant Power/Constant Voltage LED Driver

NFC Function Description

1. The output current of the NFC Mode LED driver can be adjusted using NFC via the mobile APP.

Operation Instruction:

- Compatible phone


Install an NFC-compatible smart mobile device or phone with Android™ 4.1 or IOS 12 updates.

- Steps for setting output current via NFC

1. Download Meanwell APP on mobile device or mobile phone, and enable NFC function.
2. Check the NFC antenna position of the mobile phone please.
3. Enter Meanwell APP -> Top left menu -Installation Manual/APP->PowerNFC, approach the LED driver NFC sensing position and perform sensing.
4. APP displays the functional parameters, and the relevant parameters are modified as required.
5. Tap the APP write button and quickly move the phone antenna close to the NFC sensing position of the LED driver.
6. The write completes when the mobile phone displays "Success".

APP Function Description

APP Interface:

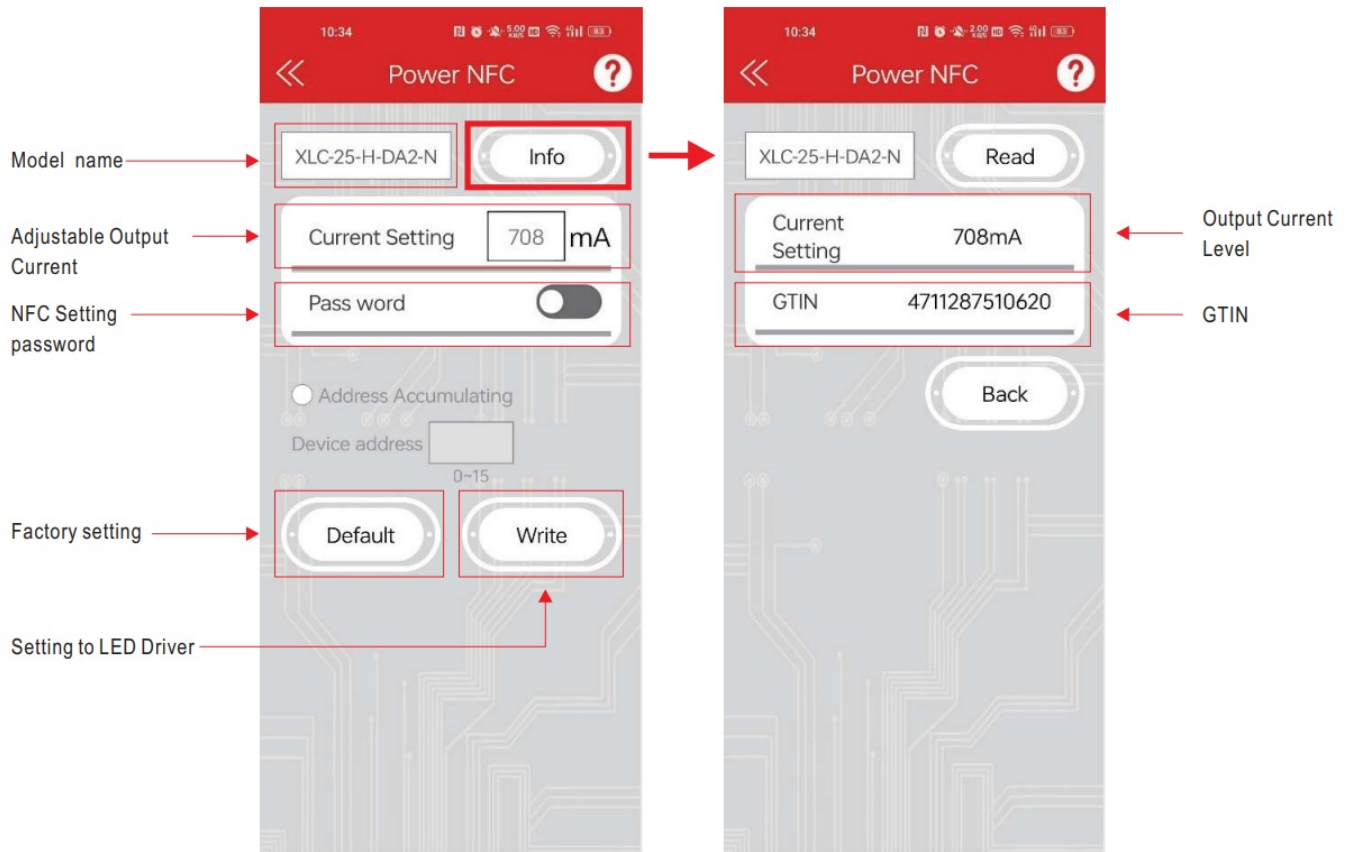

- To be used through APP available on Apple Store and Google Play Store for iOS and Android. Search: MEAN WELL on



Note:

1. Current accuracy: the numerical error between the set current and the actual current is within 2%.
2. Please turn off the input power supply to the LED driver when using NFC function.



DIMMING OPERATION

B type

- 3 in 1 dimming function
- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
0 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100m A (typ.)



Applying additive 0 ~ 10VDC

◎ Applying additive 0 ~ 10VDC

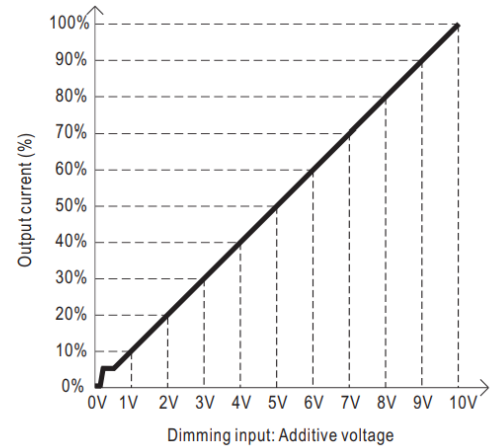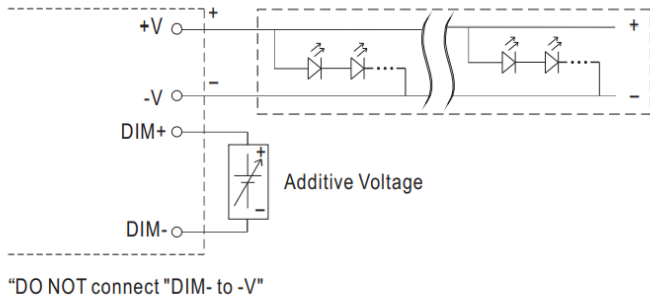



Applying additive 10V PWM signal (frequency range 300Hz~3KHz):

◎ Applying additive 10V PWM signal (frequency range 300Hz~3KHz):

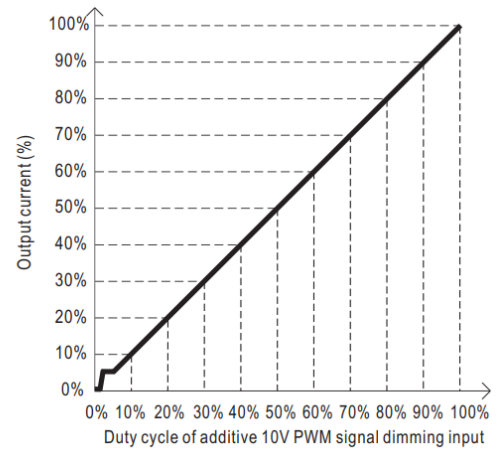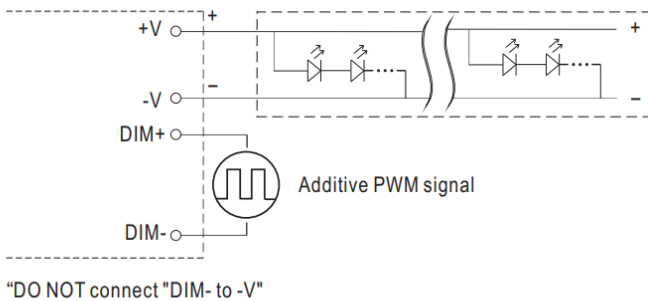

Applying additive resistance: 0~100k Ω

◎ Applying additive resistance: 0~100k Ω

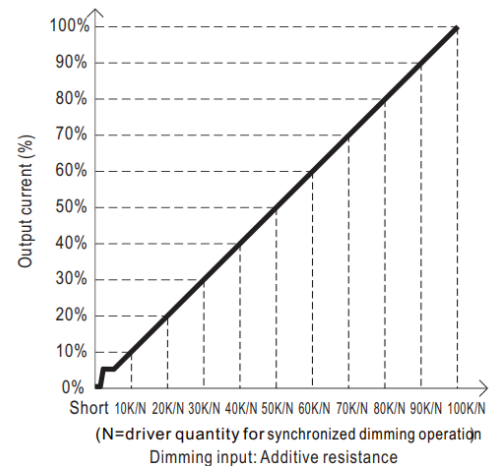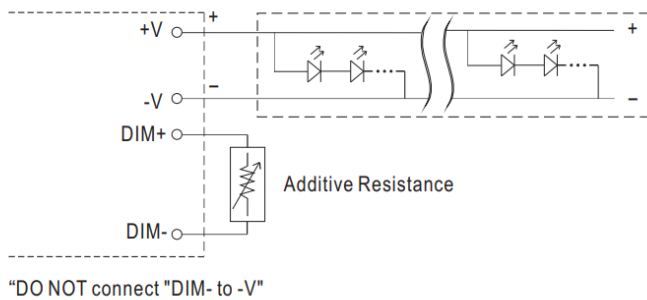


Note:

1. Min. dimming level is about 8% and the output current is not defined when $0\% < I_{out} < 8\%$.
2. The output current could drop down to 0% when the dimming input is about 0kΩ or 0Vdc, or 10V PWM signal with 0% duty cycle.

DA2 type (DALI-2 digital dimming function)

Input wiring diagram

✂ Input wiring diagram


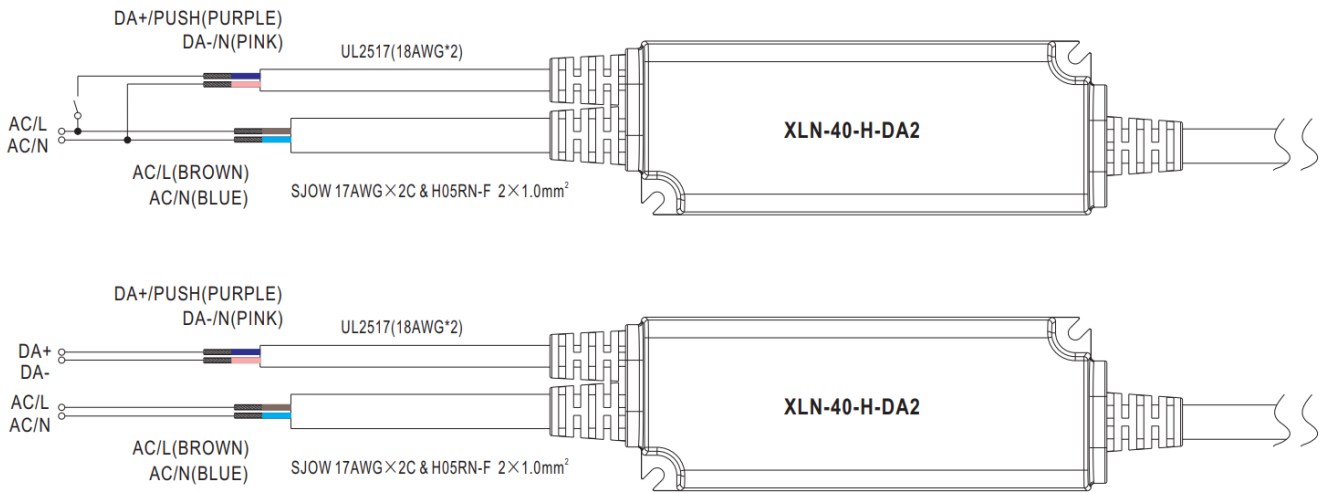


PUSH dimming (primary side)


- The factory default dimming level is at 100%.
- If the push action lasts less than 0.05 sec., it will not lead to a change for the status of the driver.
- Up to 10 drivers can perform the PUSH dimming at the same time when utilizing one common push button.
- The maximum length of the cable from the push button to the last driver is 20 meters.

Action	Action duration	Function
Short Push	0.1~1s	Turn ON-OFF the driver
Double Click	Click twice in 1.5s	Set up the dimming level to 100%
Long Push	1.5~10s	Every Long Push changes the dimming direction, dimming up or down

OUTPUT LOAD vs TEMPERATURE

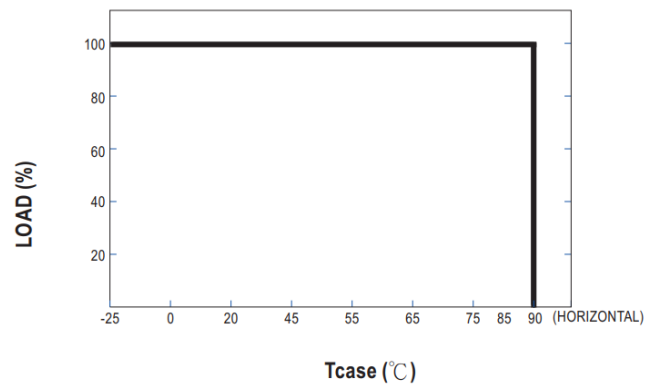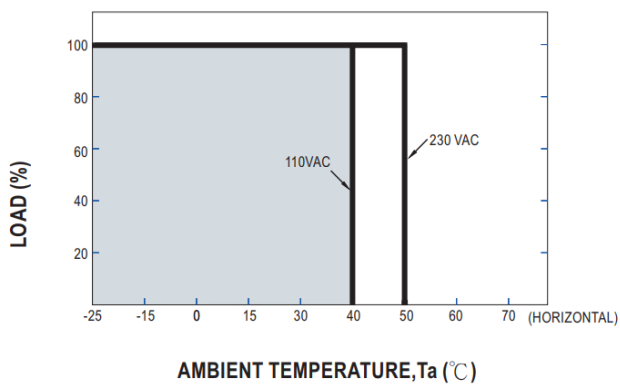


STATIC CHARACTERISTIC

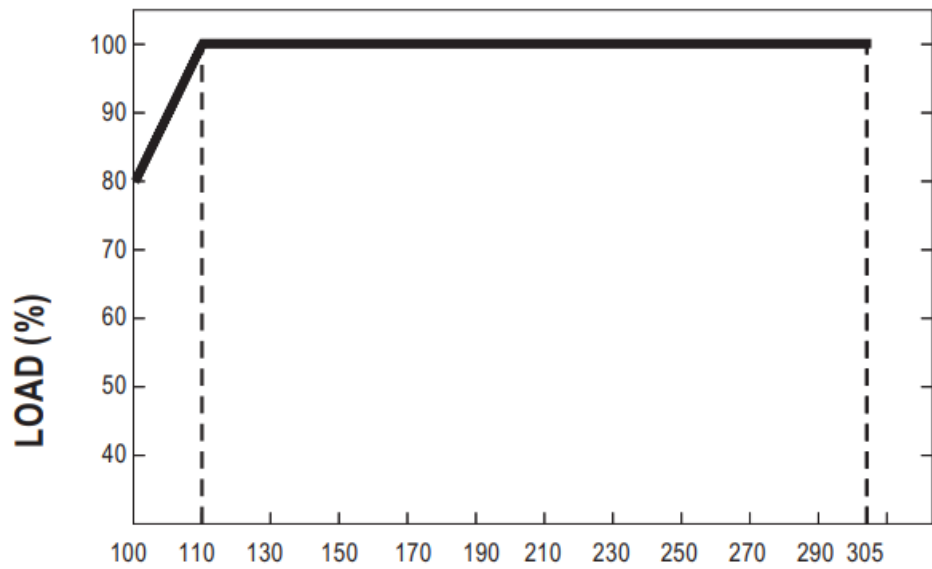

INPUT VOLTAGE (V) 60Hz



※ De-rating is needed under low input voltage.

LIFE TIME

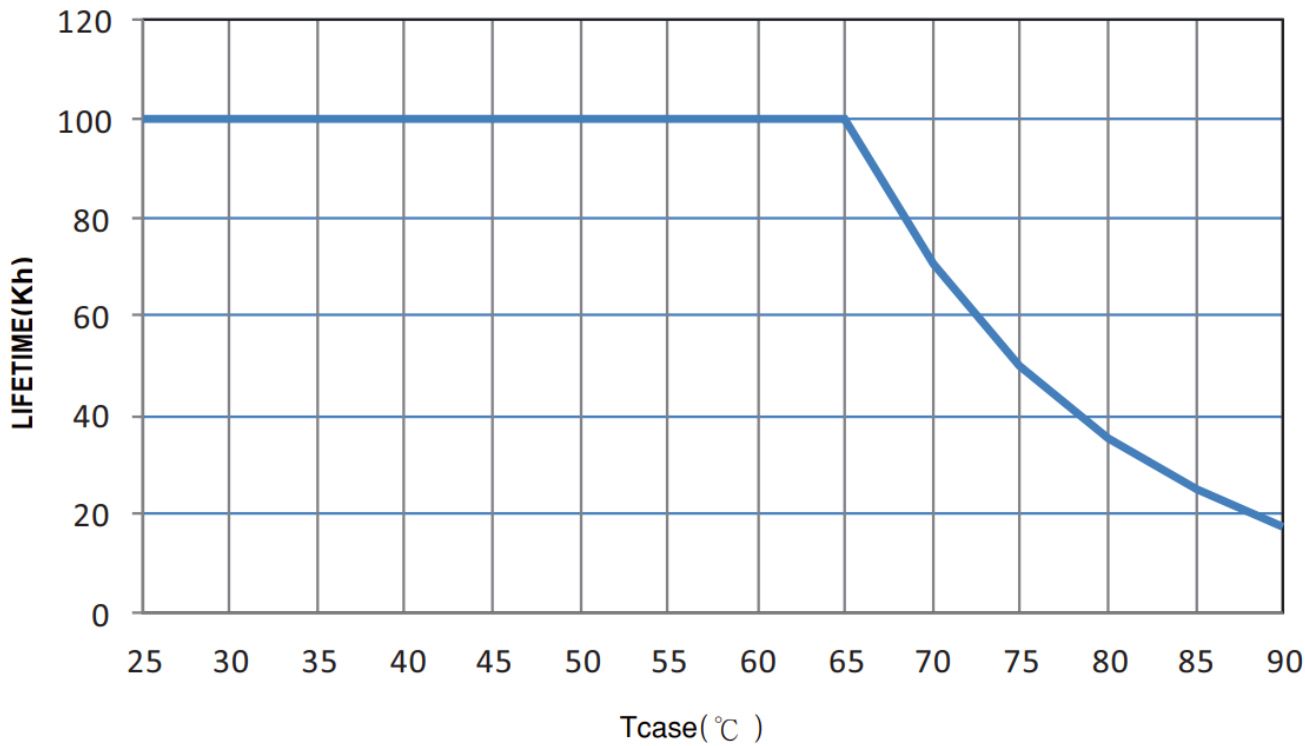

TOTAL HARMONIC DISTORTION (THD



- XLN-40-H Model, Tcase at 75°C

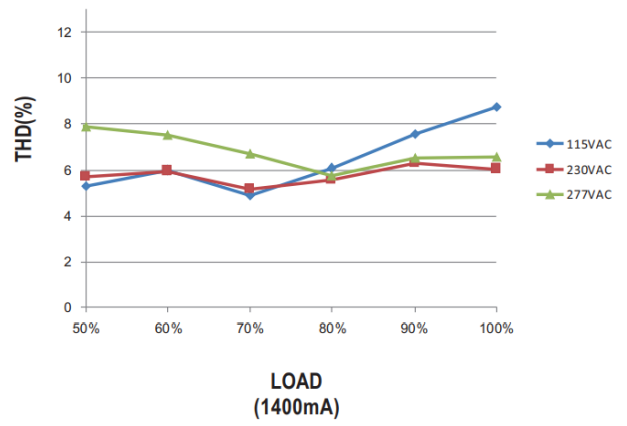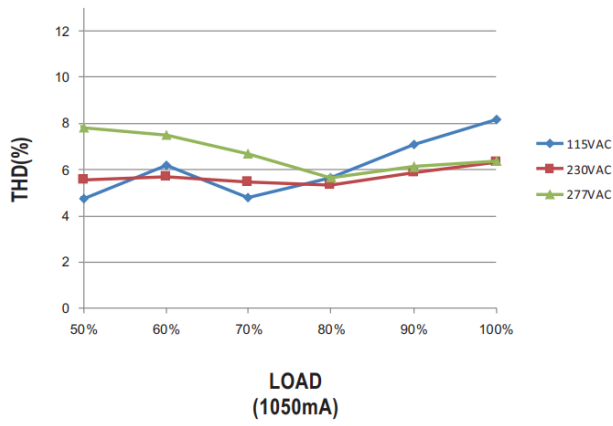

POWER FACTOR (PF) CHARACTERISTIC



- XLN-40-H Model, Tcase at 75°C

※ XLN-40-H Model, Tcase at 75°C

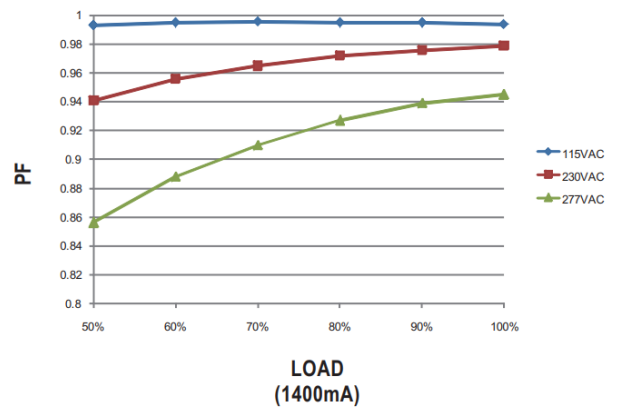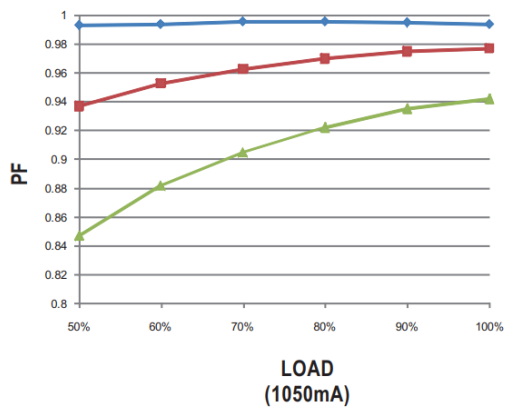

EFFICIENCY vs LOAD


- XLN-40 series possess superior working efficiency that up to 88% can be reached in field applications.
- XLN-40-H Model, Tcase at 75°C

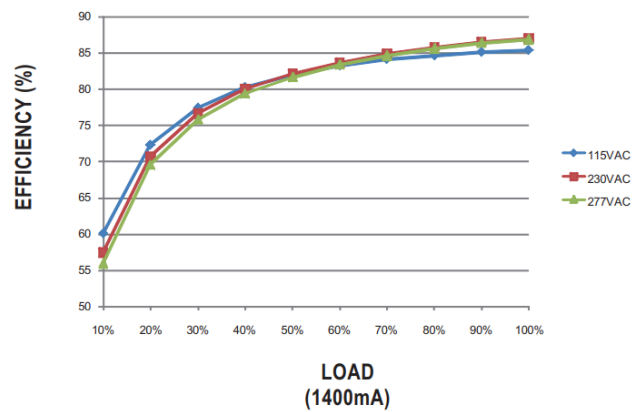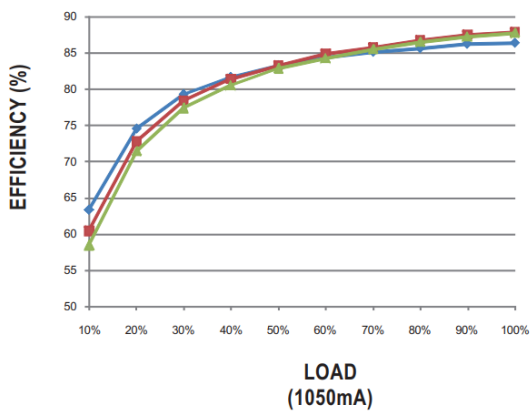


MECHANICAL SPECIFICATION

* Blank type


※ Blank type

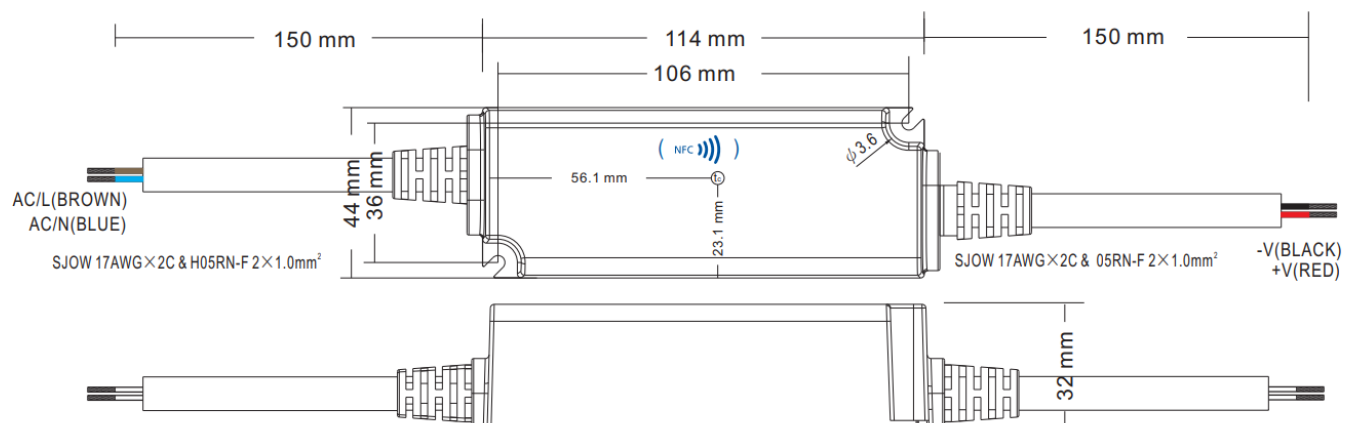

※ B type

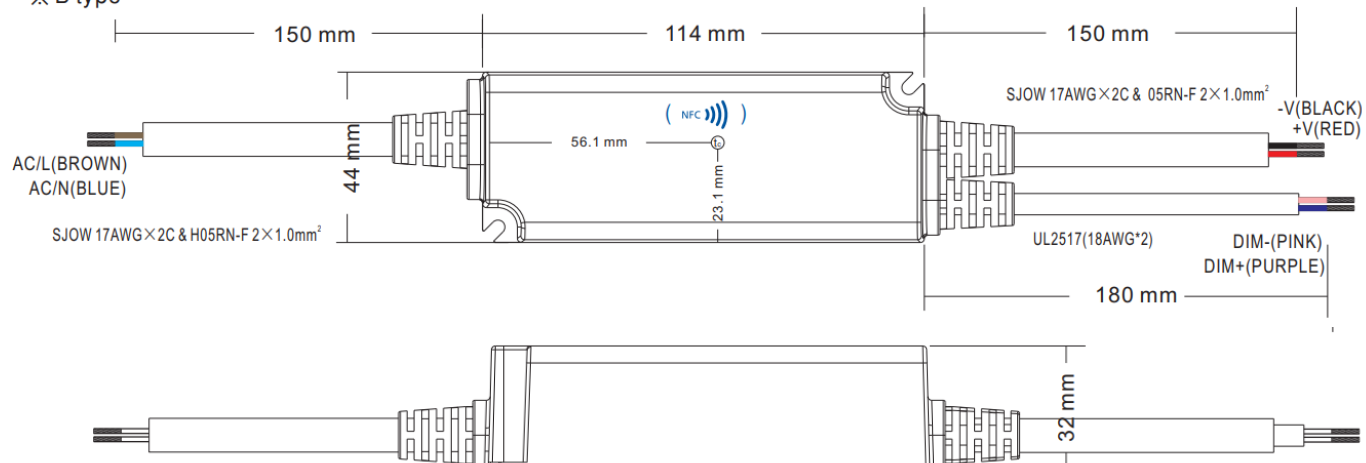

※ DA2 type

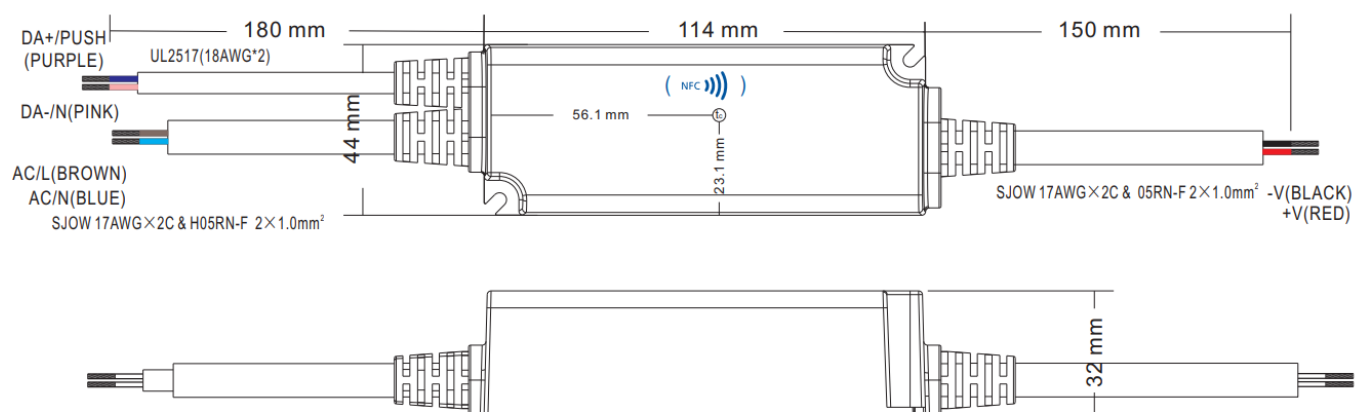


Installation Manual

- Please refer to: <http://www.meanwell.com/manual.html>

User's Manual



	<p>MEAN WELL XLN-40-12 40W Multiple Stage Constant Power Constant Voltage LED Driver r [pdf] Owner's Manual</p> <p>XLN-40-12, XLN-40.cdr, XLN-40-12 40W Multiple Stage Constant Power Constant Voltage LED Driver, XLN-40-12, 40W Multiple Stage Constant Power Constant Voltage LED Driver, Constant Power Constant Voltage LED Driver, Constant Voltage LED Driver, Voltage LED Driver, Driver</p>
---	--

References

- [User Manual](#)

[Manuals+](#). [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.