

mesqool CR1008iR Digital LED Alarm Clock Instruction Manual


[Home](#) » [Mesqool](#) » mesqool CR1008iR Digital LED Alarm Clock Instruction Manual 

Contents

- [1 mesqool CR1008iR Digital LED Alarm Clock](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 LOCATION OF CONTROLS](#)
- [5 PACKAGE LIST](#)
- [6 POWERING ON](#)
- [7 TIME SETTING](#)
- [8 Adjust Display Brightness](#)
- [9 Switch DST Time](#)
- [10 Switch 12H/24H Time Format](#)
- [11 NIGHT LIGHT](#)
- [12 RGB DISPLAY MODES](#)
- [13 ALARM SETTING](#)
- [14 OUTPUT CHARGING](#)
- [15 BED SHAKER](#)
- [16 WARRANTY](#)
- [17 Documents / Resources](#)
 - [17.1 References](#)



mesqool CR1008iR Digital LED Alarm Clock

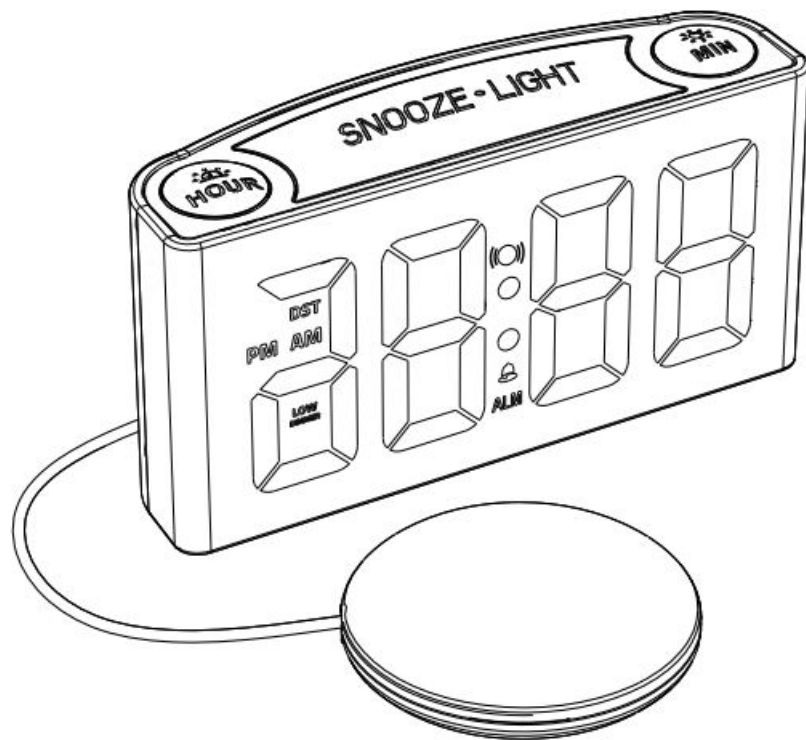

Product Information

Specifications

- Product Name: CR1008iR Digital LED Alarm Clock
- Manufacturer: Mesqool
- Country of Origin: China
- Version: 1.0

Product Usage Instructions

Chapter 1: Location of Controls

The alarm clock has various controls and indicators. Here is a list of the controls and their corresponding numbers:

1. DST Indicator
2. PM Indicator
3. AM Indicator
4. LOW DIMMER Indicator
5. Alarm Indicator
6. Buzz Indicator
7. VIB Indicator
8. Battery Compartment Cover
9. DST ON/OFF Slider
10. Buzz/VIB Slider
11. Set Time Button
12. Alarm Volume Slider

13. Alarm ON/OFF Slider
14. Set Alarm Button
15. Multi Color Button
16. Bed Shaker Port
17. Type-C Output Charging Port
18. USB Output Charging Port
19. DC IN
20. Speaker
21. Hour Button/Light Dimmer Button
22. Minute Button/Display Dimmer Button
23. SNOOZE/LIGHT Button

Chapter 2: Package List

- 1 x Multicolor Digital Alarm Clock
- 1 x Power Cord (Length: 1.5M/5ft)
- 1 x Bed Shaker (Cord Length: 1.8M/6ft)
- 1 x USB Power Adapter (DC 5V/1A)
- 1 X User Manual

Chapter 3: Powering On

1. Connect the power cord to the DC IN jack.
2. Plug the power cord into a 100~240V AC wall power outlet.
3. Install 2pcs 1.5V AAA size batteries in the battery compartment (optional).

Chapter 4: Time Setting

1. Short press the Set Time Button once, the display will start flashing.
2. Press the Hour Button to set the hour and the Minute Button to set the minute.
3. Press the Set Time Button again to save the time, or wait for another 5 seconds for automatic confirmation.

Chapter 5: Night Light

1. To turn on the Night Light, press the Night Light button.
2. To switch Night Light color, press the Switch button until you reach the desired color.
3. To adjust Night Light brightness, press the Adjust button.
4. To turn off the Night Light, long press the Night Light button for 2 seconds or press it repeatedly until it turns off.

Chapter 6: RGB Display Modes

Press the Multi Color button to switch between RGB display modes. The digits will cycle through 10 available colors.

Chapter 7: Alarm Setting

1. Make sure the Alarm ON/OFF Slider is towards the left (ON).
2. Press the Set Alarm Button, the alarm indicator will light up and the display will start flickering.
3. Press the Hour Button to set the hour and the Minute Button to set the minute.
4. Press the Set Alarm Button again to save the time, or wait for another 5 seconds for automatic confirmation.
5. Use the Alarm Volume Slider to adjust the alarm volume (LOW, HIGH, MED).

FAQ

Q: How do I temporarily turn off the alarm when it goes off?

A: Press the Snooze/Light button to temporarily turn off the alarm for 9 minutes.

Contact our experts

support-us@mesqool.com


Digital LED Alarm Clock

CREATE YOUR PERFECT SLEEP ENVIRONMENT

<http://www.mesqool.com>

Made in China


LOCATION OF CONTROLS

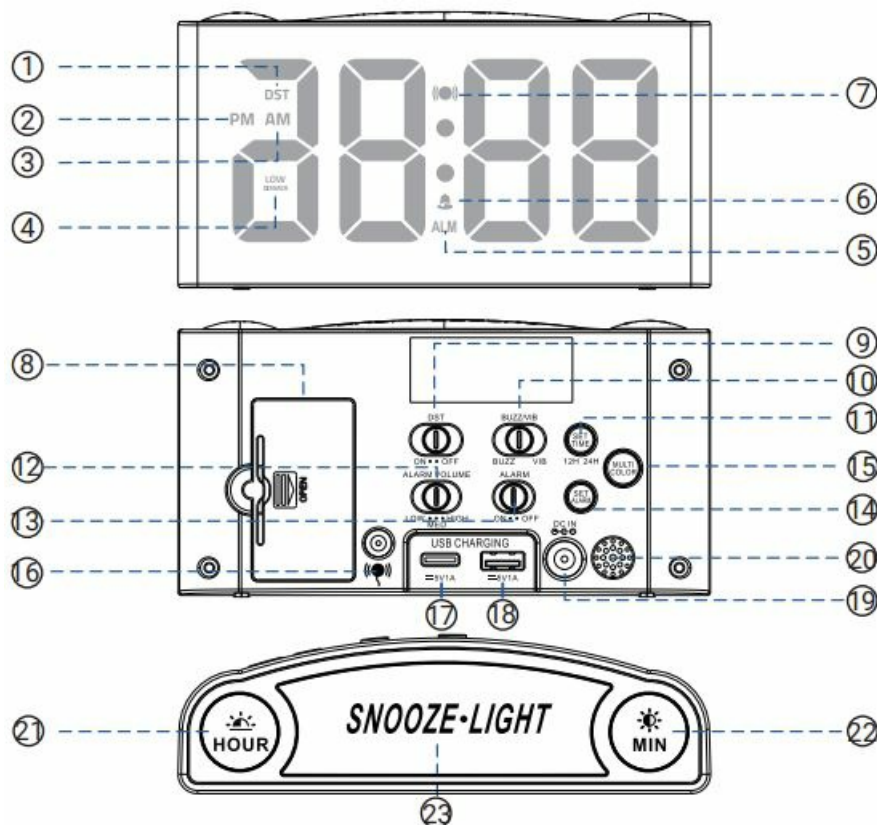

1. DST Indicator
2. PM Indicator
3. AM Indicator

4. LOW DIMMER Indicator
5. Alarm Indicator
6. Buzz Indicator
7. VIB Indicator
8. Battery Compartment Cover
9. DST ON/OFF Slider
10. Buzz/VIB Slider
11. Set Time Button
12. Alarm Volume Slider
13. Alarm ON/OFF Slider
14. Set Alarm Button
15. Multi Color Button
16. Bed Shaker Port
17. Type-C Output Charging Port
18. USB Output Charging Port
19. DC IN
20. Speaker
21. Hour Button/Light Dimmer Button
22. Minute Button/Display Dimmer Button
23. SNOOZE/LIGHT Button

PACKAGE LIST




1 x Multicolor Digital Alarm Clock




1 x Power Cord (Length: 1.5M/5ft)



**1 x Bed Shaker
(Cord Length: 1.8M/6ft)**




**1x USB Power
Adapter(DC 5V/1A)**



1 X User Manual


POWERING ON

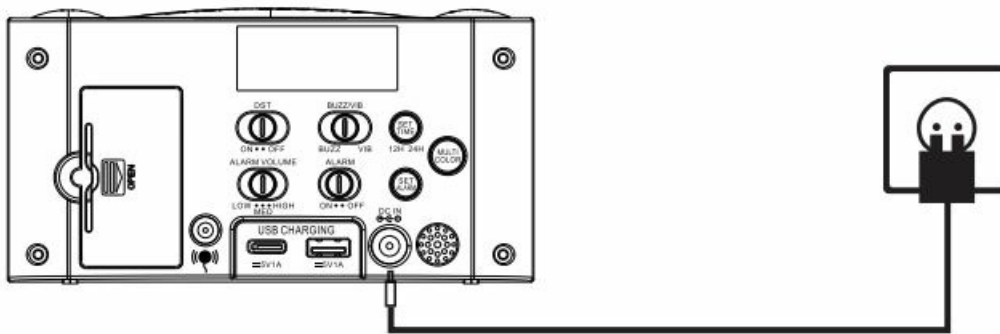



1. Connect the power cord to DC IN jack , then plug into a 100~240V AC wall power outlet.
2. Install 2pcs 1.5V “AAA” size batteries to the proper terminals in the battery compartment to memorize the time setting and the alarm will ring in case of power outage.


NOTE: Batteries (not included) don't support time display or the night light function.


TIME SETTING

1. Short press  button once, display starts flashing.



2. Press  button to set the hour, press  button to set the minute.

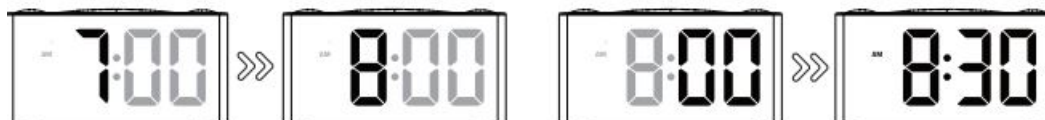

3. Press  button to save time, or wait for another 5 seconds to confirm automatically.




Adjust Display Brightness

- Press  button to adjust the brightness of the digits to your preference.




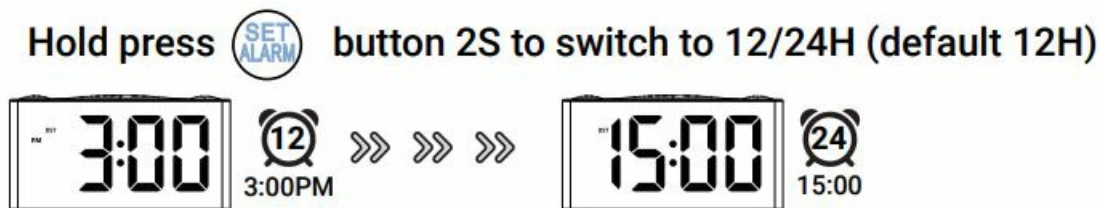
Switch DST Time

Slide switch button to turn on/off DST function.

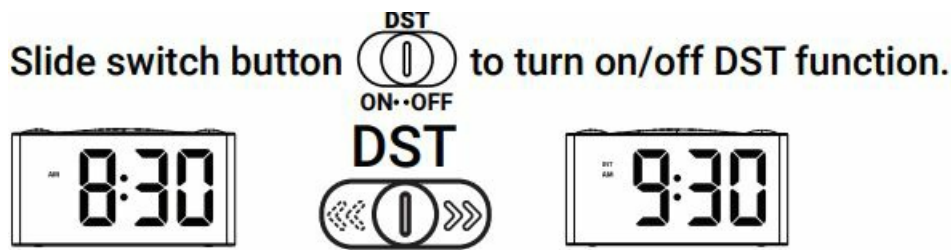


Switch 12H/24H Time Format

Hold press  button 2S to switch to 12/24H (default 12H)



NIGHT LIGHT

1. Turn on NIGHT LIGHT

Press  button then the night light will turn on.

2. Switch NIGHT LIGHT Color

When the night light turns on, you can press  button to switch to the color as you desire.


The night light colors are as below:




3. Adjust Night Light Brightness

Press  button to adjust the brightness of the night light to your preference

4. Turn off NIGHT LIGHT

Long press  button for 2 seconds or press it repeatedly until the night light turns off.

RGB DISPLAY MODES

Press  button to switch RGB display modes. The digits will cycle through 10 available colors in the following order: Random Color→RGB Left to Right Flowing→RGB Top Downward Flowing→White→Red→Green→Blue→Ice Blue→Pink→RGB Changing





Notice When the digits are White, Red, Green, Blue, Ice Blue or Pink, you can set the display to LOW DIMMER modes with less light when sleeping.


ALARM SETTING




1. Make sure the slide switch button **ON•OFF** towards the left “ON”.

2. Press  button, the alarm indicator  will light up, the display starts flickering.

3. Press  button to set the hour, press  button to set the minute.


4. Press  button to save time, or wait for another 5 seconds to confirm automatically.



5. Slide switch button **LOW • • • HIGH** **MED** to adjust alarm volume.

Turn off Alarm

When alarm goes off:

1. Press  button to temporarily turn off alarm for 9 minutes.

Alarm will ring every next 9 minutes.

2. Press ,  or  button to turn off alarm for 24 hours.


The alarm indicator is still on, which means alarm is still activated and will ring after 24 hours




3. To cancel alarm, slide switch button **ON•OFF** to OFF, alarm indicator  will disappear from the display.

OUTPUT CHARGING

- Connect your phone or tablet charging cable with the Type-A or the Type-C output charging port on the back of the alarm clock.
- The alarm clock can charge both your phone and tablet at the same time.
- The maximum charge current is 1Ampere.

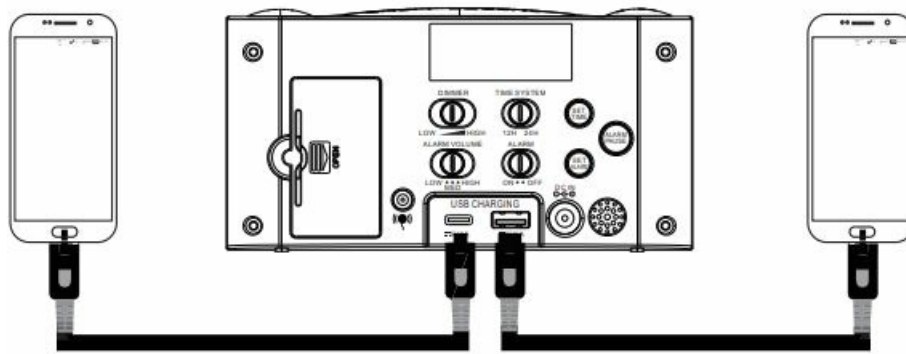

BED SHAKER

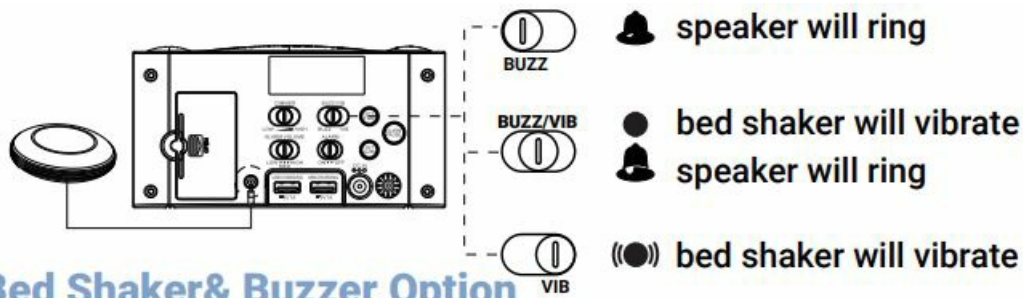

Bed Shaker & Buzzer Option

A. Wake up only by bed shaker

Plug in bed shaker---set alarm on ---slide button to VIB indicator ((●)) will light up.

B. Wake up only by buzzer sound

Set alarm on ---slide button to BUZZ indicators will light up.

C. Wake up by both Bed shaker and Buzzer sound

Plug in bed shaker---set alarm on slide button to the Medium BUZZ/VIB ((●)) indicators will light up

If you do not plug the bed shaker into the clock, no matter you slide the switch button to VIB or BUZZ/VIB, the clock will have the buzz sound when alarm goes off.

WARRANTY

• 45-Day Full Refund

If you are unsatisfied with the product or you have any questions about the product, please contact us for a full refund or technical support.


• 18-Month Warranty

If any quality problems occur within 18 months, please contact us for a replacement or partial refund.

• Life-Time Free User Support:

We offer free lifetime user support. Please don't hesitate to contact us if you have any questions or concerns.

Documents / Resources

| | |
|---|---|
|  | <p>mesqool CR1008iR Digital LED Alarm Clock [pdf] Instruction Manual CR1008iR Digital LED Alarm Clock, CR1008iR, Digital LED Alarm Clock, LED Alarm Clock, Alarm Clock, Clock</p> |
|---|---|

References

- [C Http://mesqool.com](http://mesqool.com)
- [User Manual](#)