



MGC MIX-4041 Dual Input Mini Module Instruction Manual

[Home](#) » [MGC](#) » MGC MIX-4041 Dual Input Mini Module Instruction Manual 

Contents

- [1 MGC MIX-4041 Dual Input Mini Module](#)
- [2 ABOUT THIS MANUAL](#)
- [3 MODULE DESCRIPTION](#)
- [4 SPECIFICATIONS](#)
- [5 MOUNTING](#)
- [6 WIRING](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)



MGC MIX-4041 Dual Input Mini Module



ABOUT THIS MANUAL


This manual is included as a quick reference for installation. For further information on the use of this device with a FACP, please refer to the panel's manual.

Note: This manual should be left with the owner/operator of this equipment.

MODULE DESCRIPTION

The MIX-4041 Dual Input module is designed to operate with a listed compatible intelligent fire system control panel. The module can support one Class A or 2 Class B inputs. When configured for Class A operation, the module provides an internal EOL resistor. When configured for Class B operation, the module can monitor two independent input circuits while using only one module address. The address of each module is set using the MIX-4090 programmer tool and up to 240 units may be installed on a single loop. The module has a panel controlled red LED indicator. The LED will flash during normal operation and will become steadily on when the device is in alarm condition.

FIGURE 1 MODULE FRONT

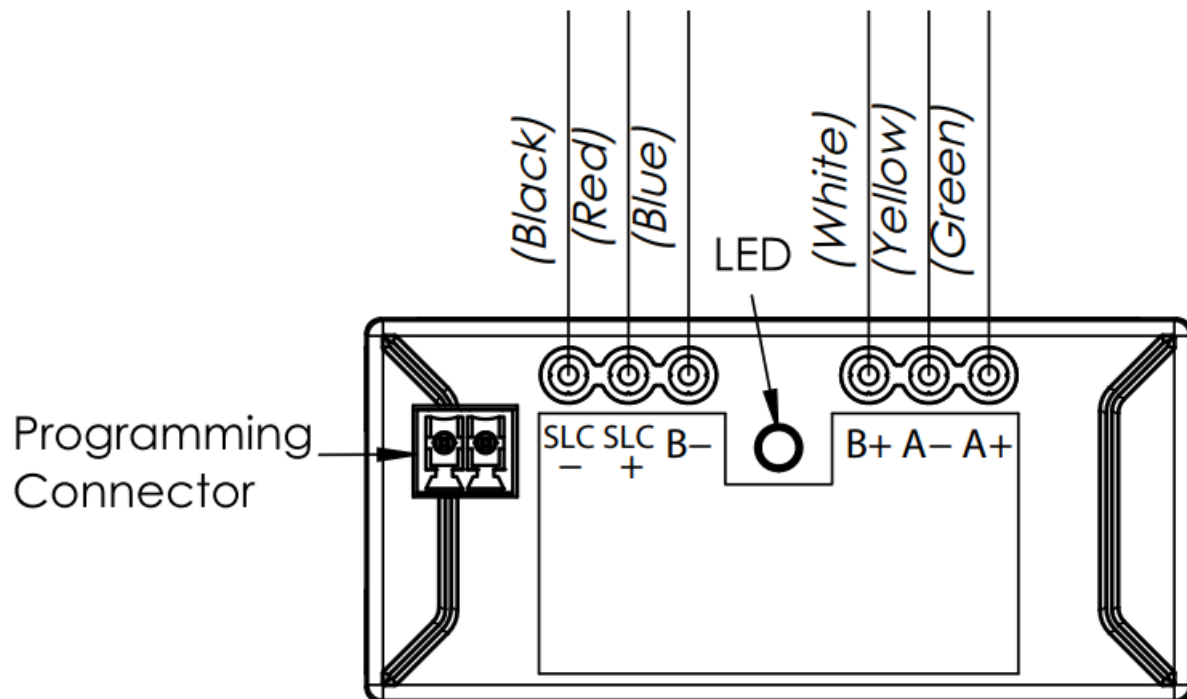

SPECIFICATIONS

- Normal Operating Voltage: 15 to 30VDC
- Alarm Current: 3.3mA
- Standby Current: 2mA with two 22k EOL
- EOL Resistance: 22k Ohms
- Maximum Input Wiring Resistance: 150 Ohms total
- Temperature Range: 32F to 120F (0C to 49C)
- Humidity: 10% to 93% Non-condensing
- Dimensions: 1 1/4"H x 2 3/4" W x 1/2" D
- Connections: 6" pigtail wires
- Accessories: MIX-4090 Programmer
- MP-302 EOL on mounting plate

MOUNTING

Notice: You must disconnect power from the system before installing the module. If this unit is being installed in a system that is currently operational, it is necessary to inform the operator and the local authority that the system will be temporarily out of service. The MIX-4041 input mini module must be installed inside an electrical box or approved enclosure. It cannot be installed free-standing.

WIRING

Note: This device should be installed as per applicable requirements of the authorities having jurisdiction. This device shall be connected to power limited circuits only.

1. Install the module wiring as indicated by the job drawings and appropriate wiring diagrams (see Figure 2 for an example of wiring for a Class A connected device and Figure 3 for an example of Class B)
2. Use the programmer tool to set the address on the module as indicated on the job drawings.

FIGURE 2 SAMPLE CLASS A WIRING:



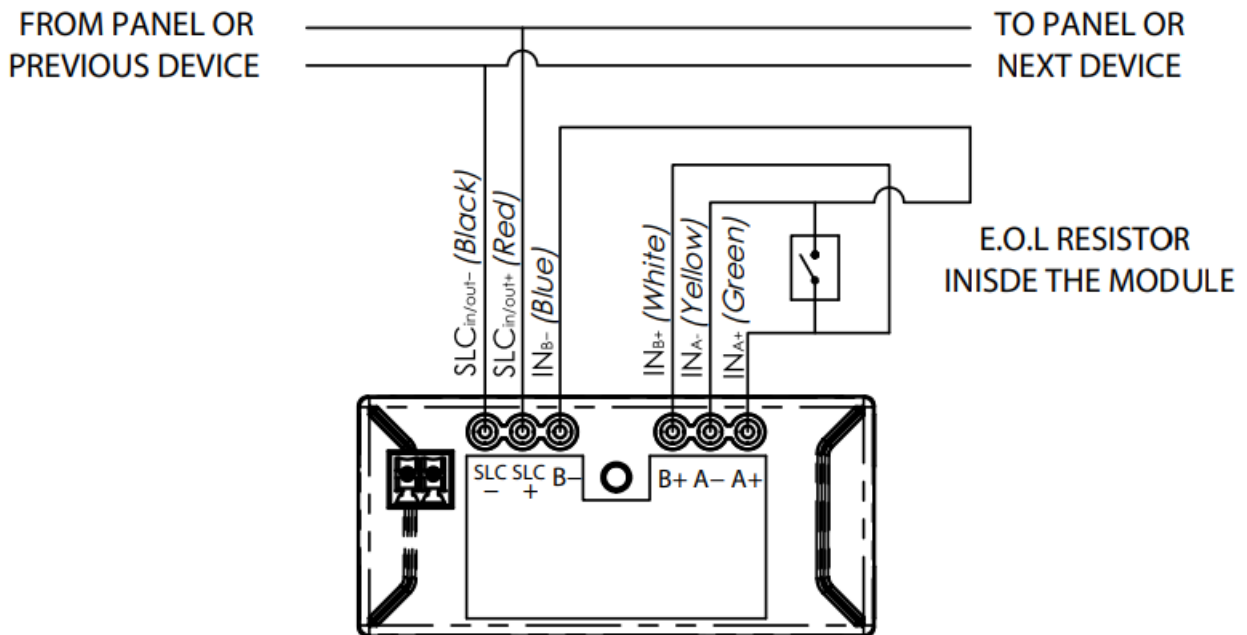


FIGURE 3 SAMPLE CLASS B WIRING:

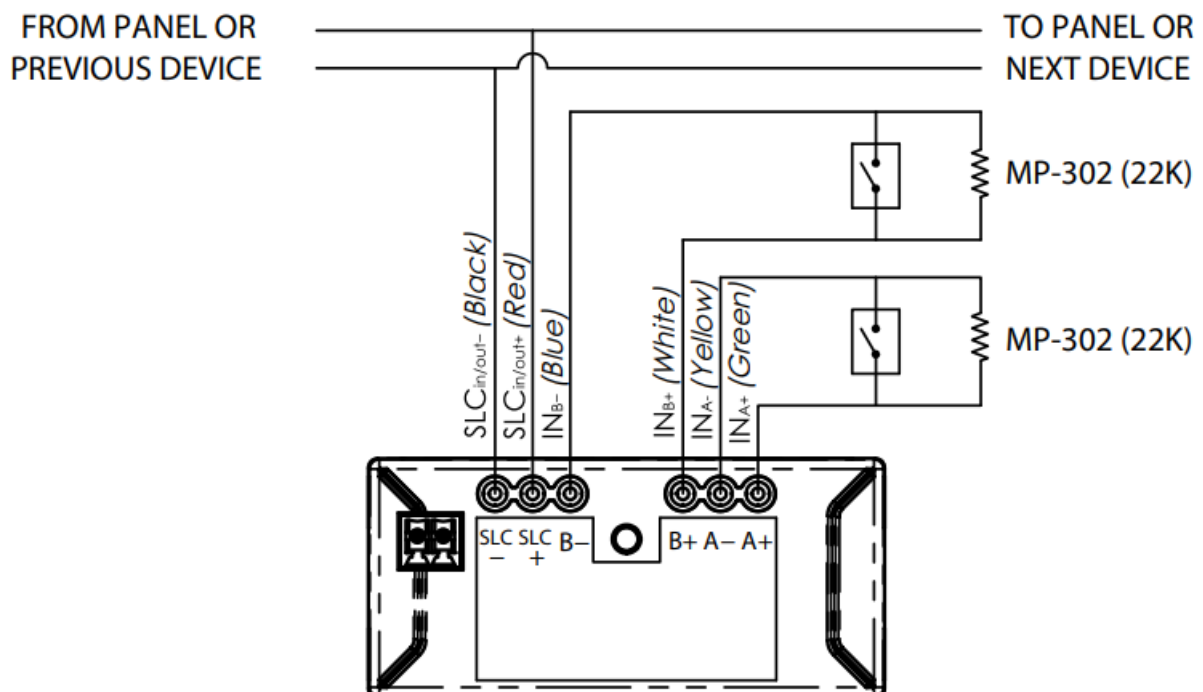

	<p>MGC MIX-4041 Dual Input Mini Module [pdf] Instruction Manual</p> <p>MIX-4041, Dual Input Mini Module, MIX-4041 Dual Input Mini Module, Mini Module, Module</p>
---	--

References

-  [Fire Alarm Resources | Download fire alarm documents](#)
-  [Mircom - Smart Buildings. Smarter Solutions.](#)