


MiBOXER FUT037Z+ 3 in 1 ZigBee LED Controller



# MiBOXER FUT037Z+ 3 in 1 ZigBee LED Controller Instruction Manual

[Home](#) » [MiBOXER](#) » MiBOXER FUT037Z+ 3 in 1 ZigBee LED Controller Instruction Manual 

## Contents

- [1 MiBOXER FUT037Z+ 3 in 1 ZigBee LED Controller](#)
- [2 Product Usage Instructions](#)
- [3 Product features](#)
- [4 Set up output mode](#)
- [5 2.4G RF Remote control instruction](#)
- [6 Smartphone APP control instruction](#)
- [7 Philips Hue control instruction](#)
- [8 Alexa voice control instruction](#)
- [9 Google Home voice control instruction](#)
- [10 DMX512 LED Transmier Control](#)
- [11 FAQ](#)
- [12 Documents / Resources](#)
  - [12.1 References](#)



**MiBOXER FUT037Z+ 3 in 1 ZigBee LED Controller**



## Specifications

- Made by new Zigbee 3.0 wireless transmitting technology Low power consumption
- Strong ability to build network automatically and anti-interference
- Supports MiBoxer Zigbee gateway for wireless dimming color, remote control, timing control, group control, music rhythm function
- Supports 2.4G RF remote control
- 16 million colors to choose from
- Color temperature adjustable
- Dim brightness / Saturation
- Follows Zigbee 3.0 standard protocol
- Supports Zigbee 3.0 remote control (Zigbee 3.0 gateway is needed)
- Supports 2.4G Remote control
- Auto-transmitting & Synchronization
- Support Smartphone app control (Zigbee 3.0 gateway is needed)
- Support third-party voice control (Zigbee 3.0 gateway is needed)
- DMX512 controllable (Only for RGB+CCT output mode, DMX512 LED transmitter is needed)

## Product Usage Instructions

## Set up Output Mode

To set up the correct output mode based on the feature of lights, follow these steps

Sensing method: Press the SET button continuously to switch output mode (attention: it will log out without operation within 3 seconds).

## Output Mode Sheet:

Indicator Color	Output
Red Light	RGB
Green Light	RGBW
Blue Light	RGB+CCT

## Compatible with these 2.4G RF remote controls (Purchased separately):

- FUT100
- FUT089S FUT089
- FUT088

## 2.4G RF Remote Control Instructions

### 1. Linking Code Instructions

1. Power off for 10 seconds and power on again or short press SET one time.
2. Short press the Link/Unlink button three times within 3 seconds.
3. Lights blink three times slowly to indicate successful linking.

### 2. Unlinking Code Instructions:











1. Power off for 10 seconds and power on again or short press SET one time.
2. Short press the Link/Unlink button five times within 3 seconds.
3. Lights blink ten times quickly to indicate successful unlinking.

### 3. Auto Transmitting & Synchronization (only for remote control):

- Remote signal auto-transmitting: One light can transmit the signals from the remote control to another light within 30m.
- Dynamic modes auto-synchronization: Multiple lights can synchronize if they are in the same dynamic mode and linked with the same remote (distance between each light is within 30m).

## Product features

Made by new Zigbee 3.0 wireless transmitting technology with low power consumption, strong ability to build network automatically and anti-interference. with MiBoxer Zigbee gateway to get wireless dimming color, remote control, timing control, group control, music rhythm function. Support 2.4G RF remote control.

-  16 Millions of colors to choose
-  Color temperature adjustable
-  Dim brightness / Saturation
-  Follow Zigbee 3.0 standard protocol
-  Support Zigbee 3.0 remote control (Zigbee 3.0 gateway is needed)
-  Support 2.4G Remote control
-  Auto-transmitting & Synchronization
-  Support Smartphone app control (Zigbee 3.0 gateway is needed)
-  Support third party voice control (Zigbee 3.0 gateway is needed)
-  DMX512 controllable  
(Only for RGB+CCT output mode DMX512 LED transmitter is needed)

#### Various control solution



#### Set up output mode

##### Set up correct output mode based on the feature of lights

**Setting method:** Press "SET" button continuously to switch output mode (**attention:** it will log out without operation within 3 seconds)

Output mode sheet ( confirm output mode based on color of indicator)

Indicator color	Red Light	Green Light	Blue Light
Output	RGB	RGBW	RGB+CCT

**Compatible with these 2.4G RF remote controls (Purchased separately)**



FUT100



FUT089S



FUT089  
FUT089-B



FUT088



FUT092  
FUT092-B




FUT096  
FUT096-B




B8



B0 / B0-B



B4 / B4-B / T4



B3 / B3-B / T3




S2-B / S2-W  
S2-G




FUTD01

## 2.4G RF Remote control instruction


### Linking Code Instructions

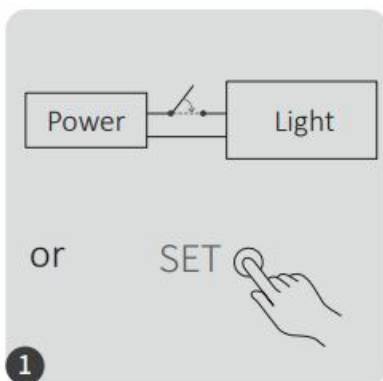

1

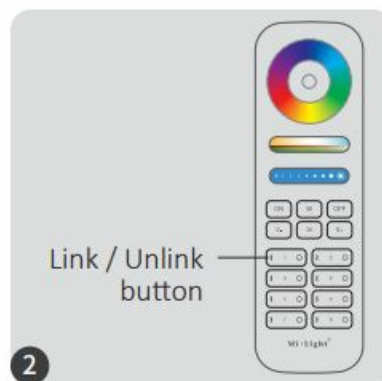

2

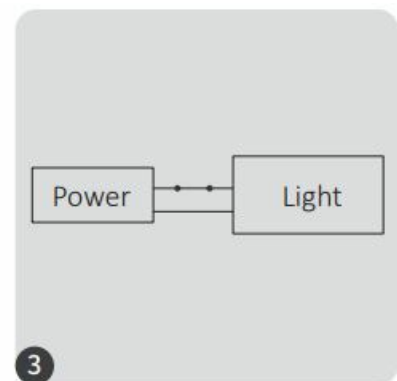

3

1. Power off 10 seconds and power on again or short press " SET " one time
2. Short press " I " button 3 times within 3 seconds.
3. Lights blink 3 times slowly means linking is done successfully.

UnLinking failed if light is not blinking slowly, Please follow above steps again. ( **Note:** Light that have linked can't

link again)

### Unlinking Code Instructions



1. Power off 10 seconds and power on again or short press "SET" one time
2. Short press "I" button 5 times within 3 seconds.
3. Lights blink 10 times quickly means unlinking is done successfully.

Unlinking fails if light is not blinking quickly, Please follow above steps again. (Note: Light haven't linked that don't need to unlink)


### Auto transmitting & Synchronization (only for remote control)

- **Remote signal auto transmitting**

One light can transmit the signals from the remote control to another light within 30m, as long as there is a light within 30m, the remote control distance can be limitless.

- **Dynamic modes auto synchronization**

Multi lights can synchronize if they are in same dynamic mode and linked with same remote (distance between each light is within 30m)

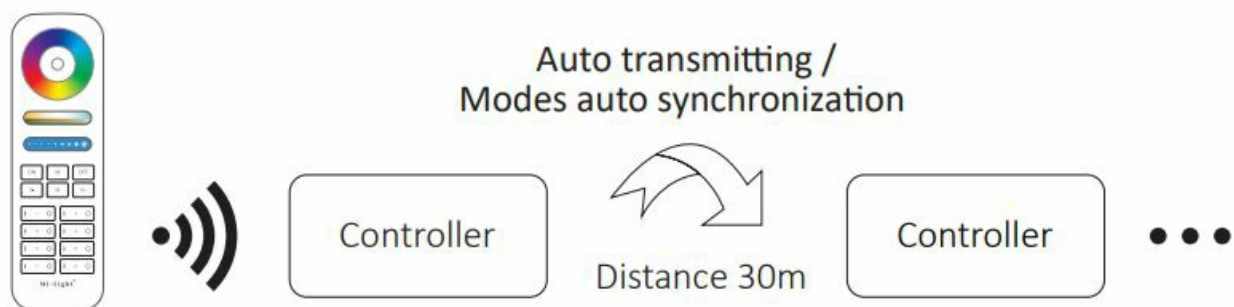

### Dynamic mode table selection (only for remote control)

1. **Select dynamic mode table 1:**

While the light is in static mode, short press the "S+" button 5 times quickly until blue light flashes 3 times slowly, static mode is activated successfully.

2. **Select dynamic mode table 2:**

While the light is in static mode, press the "s-" button 5 times quickly until the yellow light flashes 3 times slowly, static mode is activated successfully.

#### Dynamic mode table 1 (default)

Number	Dynamic Mode	Brightness / Saturation / Speed
1	Mardi Gras	Adjustable
2	Automatic color change	
3	Sam	
4	Gemstone	
5	Twilight	
6	American	
7	Fat Tuesday	
8	Party	
9	Slow Color Splash	

#### Dynamic mode table 2 (need to switch manually)

Number	Dynamic Mode	Brightness / Saturation / Speed
1	Seven colors gradual change	Adjustable
2	White light Gradual change	
3	RGB gradual change	
4	Seven colors jump to change	
5	Jump to change randomly	
6	Red light gradual change +Flash 3 times	
7	Green light gradual change +Flash 3 times	
8	Blue light gradual change +Flash 3 times	
9	White light gradual change +Flash 3 times	

#### PWM high frequency / low frequency switching

- **Switch to high frequency (16KHz):**

Press “OFF” button 1 time within three seconds and press “ON” button 5 times, Activated successfully once led light flashes 2 times quickly.

- **Switch to low frequency (250Hz):**

Press “ON” button 1 time within three seconds and press “OFF” button 5 times, Activated successfully once led light flashes 2 times slowly.

**“Do Not Disturb” mode is activated and shut down (default activated)**

- Turn on “Do Not Disturb” mode (wide using in the area which have power failure frequently to save energy)  
2.4G RF Remote turn on and turn off instruction
- Turn on “Do Not Disturb” mode: Press “OFF” button three times within three seconds and press “ON” button three times, Activated successfully once led light flashes four times quickly.

**Attention:** Do not disturb mode is activated

1. When the light is OFF status (For example: Use app or remote to turn off light) The light is OFF status once you turn off power and turn on again. (User must turn off and turn on power twice times to activate light or use APP / remote to activate light)
2. When the light is ON status

The light is ON status once you turn off and turn on power one time.


- **Turn off “Do Not Disturb” mode:** Press “ON” button three times within three seconds and press “OFF” button three times, closed successfully once led light flashes four times slowly.
- **Attention:** The light will be always “ON” status if you turn on and turn off power once user closed “Do Not Disturb” mode. App turn on and off “Do Not Disturb” mode instruction (check details in page 8)

## **Smartphone APP control instruction**

Added Zigbee 3.0 gateway into “Tuya Smart” App (please review instruction of Zigbee 3.0 gateway)


1. Connect with power supply.
2. Pairing network (attention: factory default is pairing network).
  - **Way one:** Turn off and turn on light 3 times or over 3 times continuously, the light is in breathing status.
  - **Way two:** Long press ” SET ” key until indicator light flashing.
3. Open “Tuya Smart” APP to click Zigbee gateway, then click “Add sub device”.
4. Click “Indicator is flashing quickly”.
5. Support APP dimming or group control and etc once added successfully.



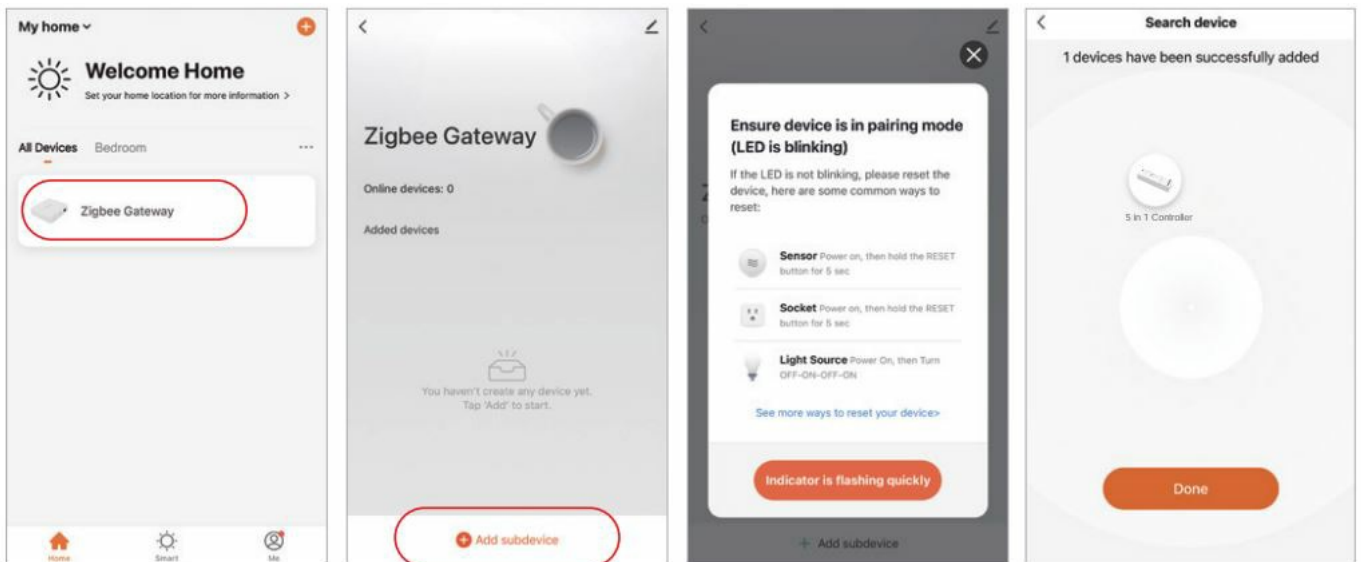

### App turn on and off “Do Not Disturb” mode (default activated)




Click the light which need to be set up or group control — click “More” — click “Power-on behavior” — turn on or off

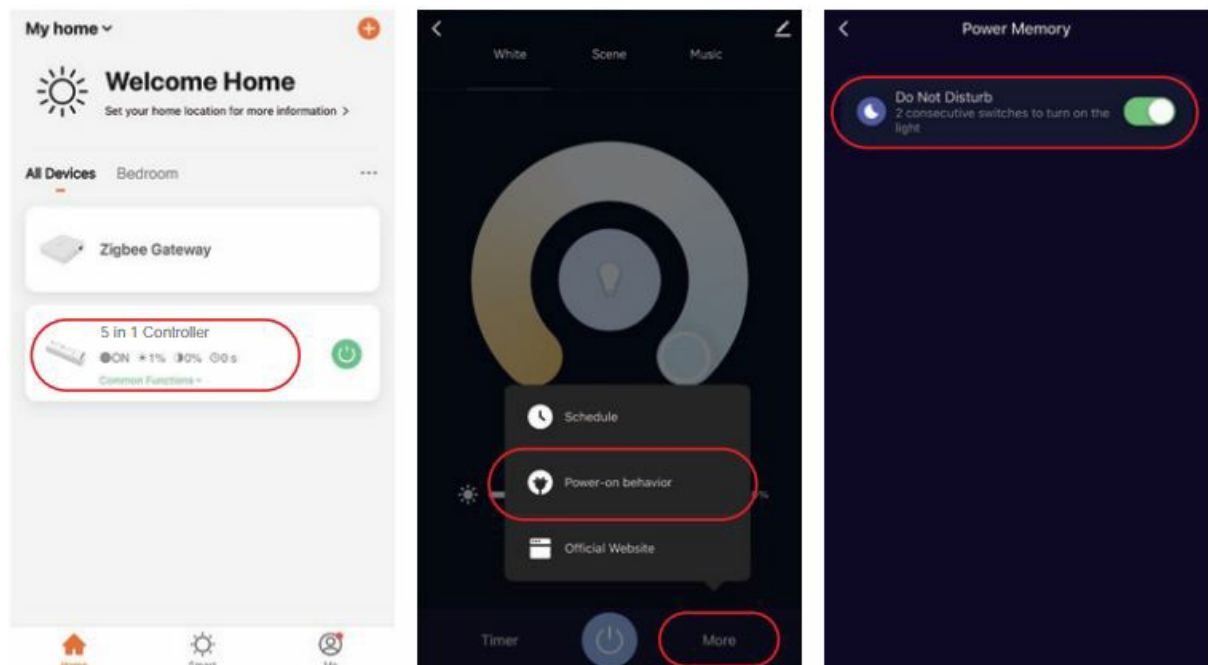

### Philips Hue control instruction

#### Added “Philips Hue” into APP

1. Connect with power supply
2. Pairing network (attention: factory default is pairing network)
  - **Way one:** Turn off and turn on light 3 times or over 3 times continuously, the light is in breathing status.
  - **Way two:** Long press ” SET” key until indicator light flashing.
3. Open “Philips Hue” App to click “SETTINGS” and click “Lights”
4. Click “+” on the top of right corner
5. Click “Search”
6. Click “Start configuration”, Follow the app instruction to complete configuration

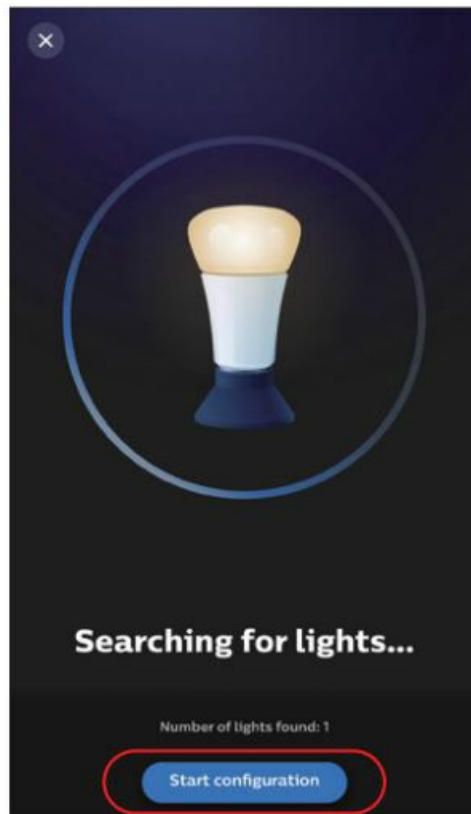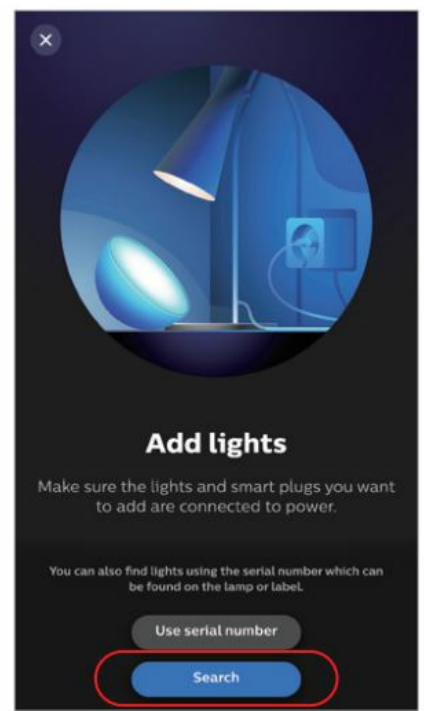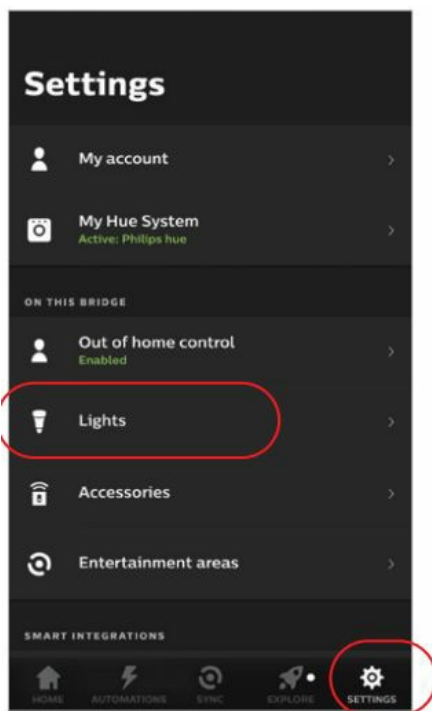

## Alexa voice control instruction

### 1). Alexa control (Audio support Zigbee 3.0 protocol)


You can connect directly if your Amazon ECHO already is built-in zigbee 3.0 protocol, following model with zigbee 3.0 protocol

Amazon ECHO Plus ( 2nd Gen), ECHO (4th Gen), ECHO Studio, ECHO Show (2. Gen) |

1. Connect with power supply
2. Pairing network (attention: factory default is pairing network)
  - **Way one:** Turn off and turn on light 3 times or over 3 times continuously, the light is in breathing status.

- **Way two:** Long press " SET " key until indicator light flashing.


3. Say to Amazon ECHO "Alexa, Discover devices" Wait for a while to discover device, Voice control is activated

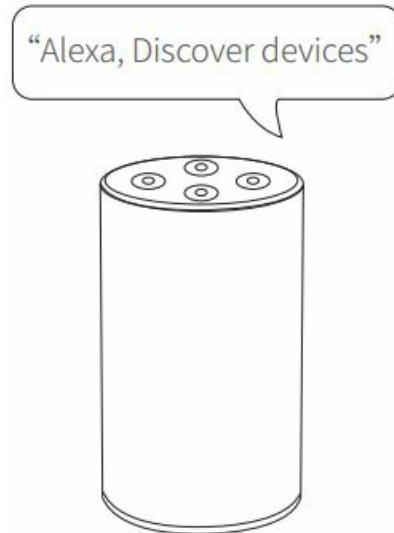

### Alexa control (Audio don't support Zigbee 3.0 protocol)

Please add device into Miboxer Zigbee 3.0 gateway if your Alexa don't support zigbee 3.0 protocol (check details in page 8), then start following steps


1. Open Alexa App
2. Click "More" on the bottom of right corner
3. Click "Skills & Games"

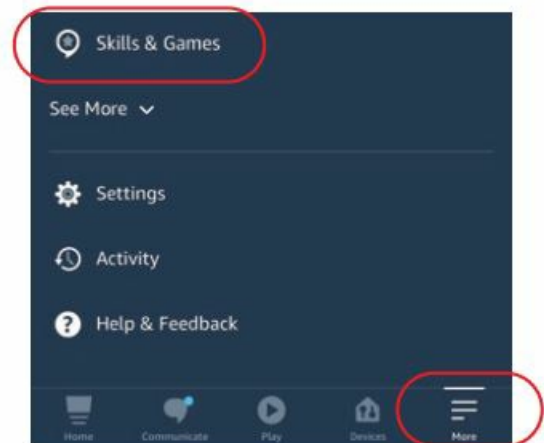

4. Click " Search Bar " on the top of right corner
5. Type into "Smart life" and search




6. Click the "Smart Life" skill, follow the instructions to finish configuration and start voice control

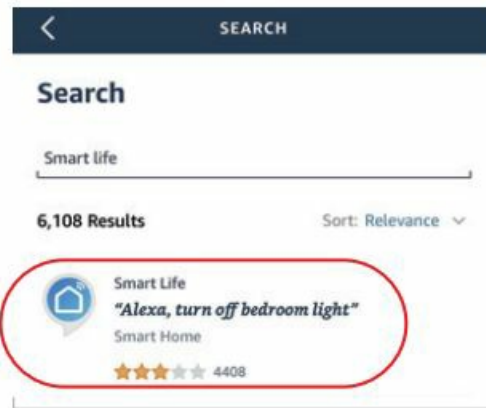


## Google Home voice control instruction

Please add device into MiBoxer Zigbee 3.0 gateway (check details in page 8) and start following steps


1. Open Google Home App
2. Click “+” on the top of left corner

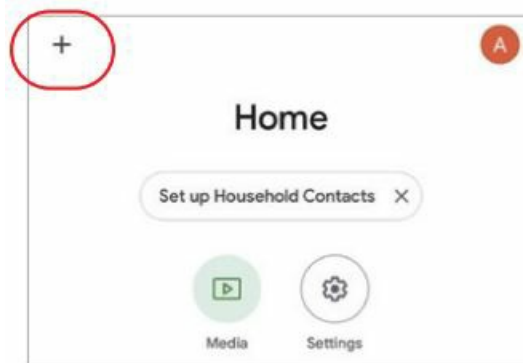

3. Click “Set up device”

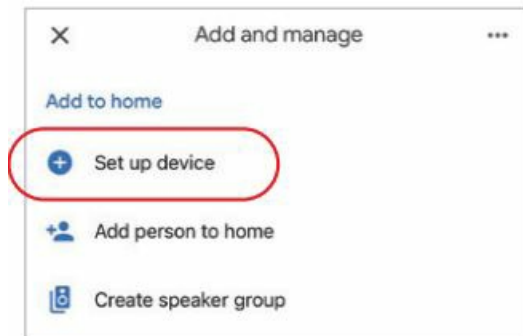


4. Click “Works with Google”

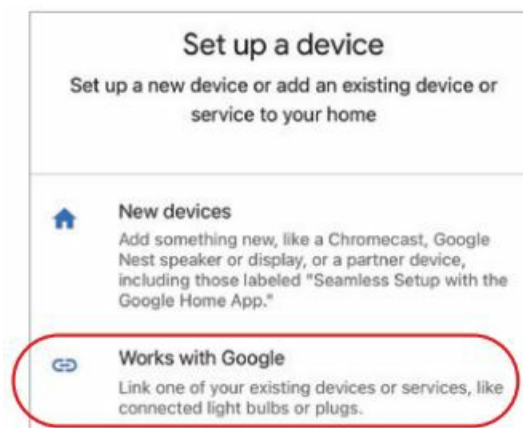

5. Click “Search Bar ” on the top of right corner


6. Type into “Smart life” and search

7. Click the “Smart Life” skill, follow the instructions to finish configuration and start voice control

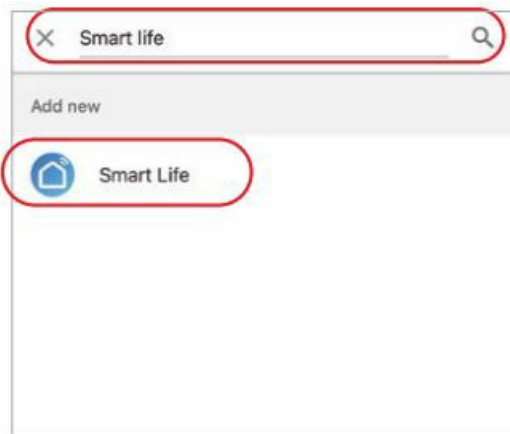


## DMX512 LED Transmier Control

Only for RGB+CCT output mode

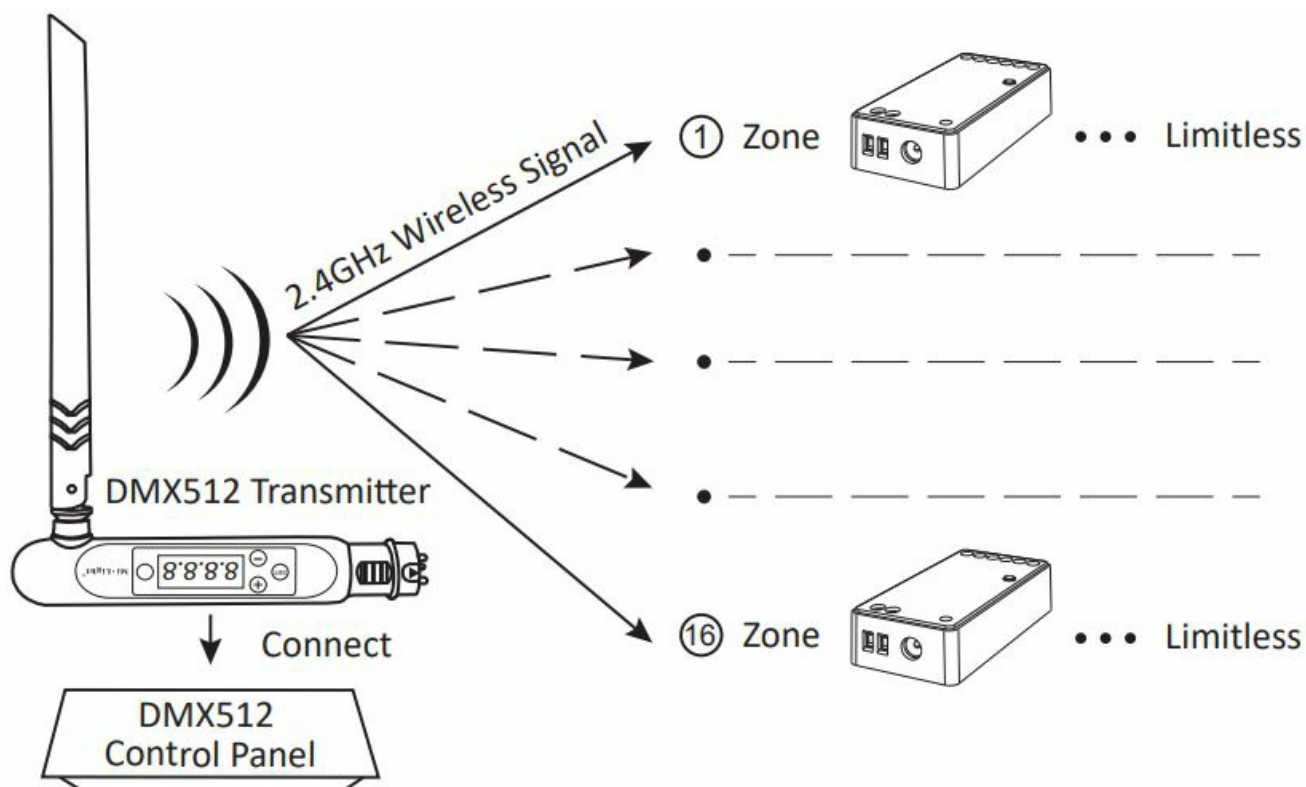

## DMX512 LED Transmitter Link/Unlink

\* Follow instructions of the DMX512 transmitter (FUTD01), Choose the zone for the light by pressing “+” or “-” (e.g. “CH12” means zone 12)

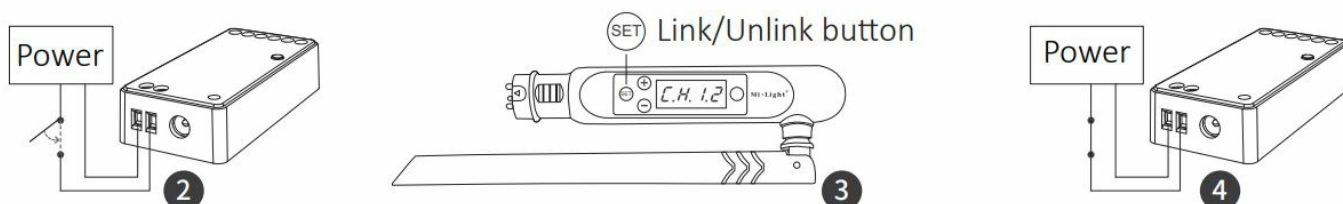

## Link

- The controller is powered off for 10 seconds and then powered on, or press " SET" button 1 time.
- Short press "E" 3 times within 3 seconds while the indicator of controller is ON
- Link is done once indicator of controller flashes 3 times slowly

## Unlink

- The controller is powered off for 10 seconds and then powered on, or press " SET " button 1 time.
- Short press "e" 5 times within 3 seconds while the indicator of controller is ON
- Unlink is done once indicator of controller flashes 10 times quickly

If the link or unlink failed, please follow the above steps again.

## Attention

1. Please turn off power supply before installation.
2. Please ensure input voltage to be same as requirements from device.
3. Don't disassemble device if you are not expert, otherwise it will damage it.
4. Please do not use the light in the place with widely range metal area or strong electromagnetic wave nearby, otherwise, the remote distance will be seriously affected.

Scan QR code to watch Zigbee series video instruction Or enter into following link directly

<https://miboxer.com/light/video/zigbee.html>



## FAQ

### **Q: What is the range of the remote control signal?**

A: The remote control signal can be transmitted up to 30m, and as long as there is a light within this range, the remote control distance can be limitless.

### **Q: Can I control multiple lights with one remote?**

A: Yes, if the lights are in the same dynamic mode and linked with the same remote, they can synchronize their dynamic modes within a 30m range.

---

## Documents / Resources

[illegible]

## References

- [!\[\]\(a88007b249b36c75dcbde101f514cec3\_img.jpg\) Zigbee Series Video - MiBoxer](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.