




MICROCHIP EV96C70A 55W Dual Output Converter from 36V-54V Input EVB User Guide

[Home](#) » [MICROCHIP](#) » MICROCHIP EV96C70A 55W Dual Output Converter from 36V-54V Input EVB User Guide



MICROCHIP EV96C70A 55W Dual Output Converter from 36V-54V Input EVB

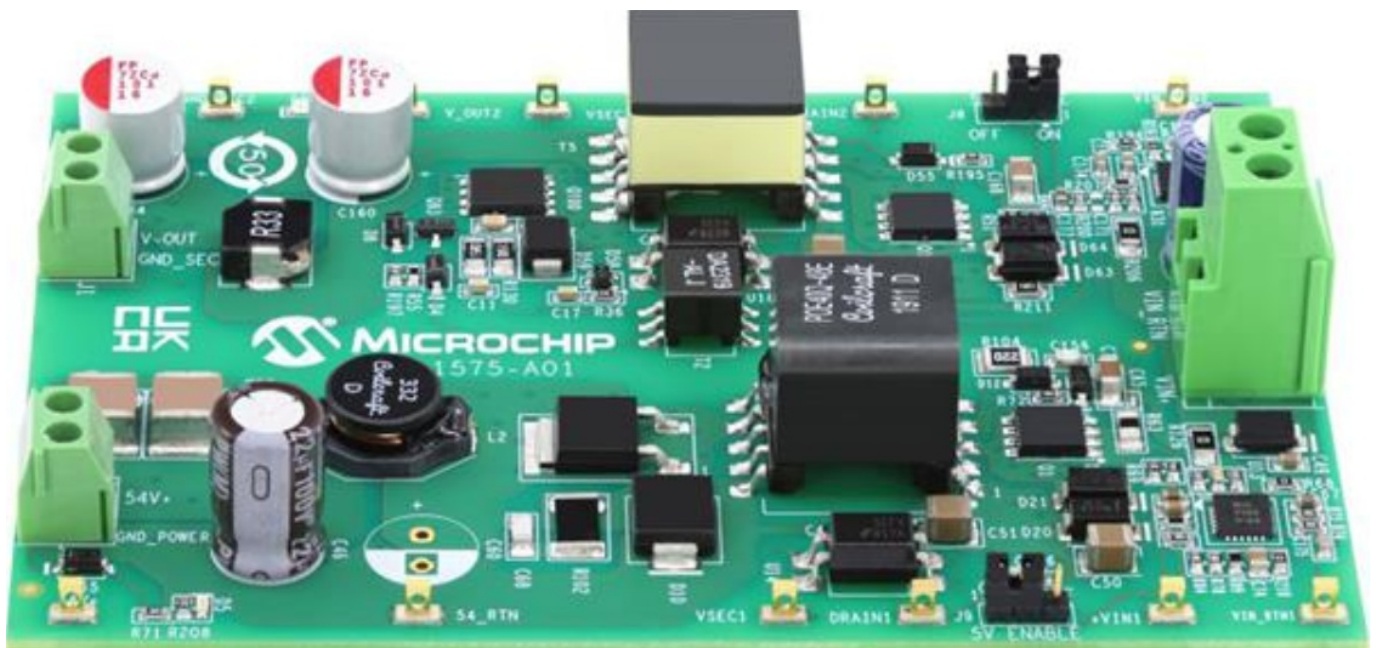

Contents

- 1 Introduction
 - 1.1 Figure 1. EV96C70A Block Diagram
 - 1.2 Figure 2. EV96C70A Evaluation Board
- 2 Product Overview
 - 2.1 Evaluation Board Features
 - 2.2 Evaluation Board Connectors
 - 2.3 Output Connectors
 - 2.4 Electrical Characteristics
 - 2.5 Table 1-5. Electrical Characteristics
- 3 Installation
 - 3.1 Initial Configuration
- 4 Schematic
- 5 Bill of Materials
- 6 Board Layout
- 7 Ordering Information
- 8 Revision History
- 9 The Microchip Website
- 10 Product Change Notification Service
- 11 Customer Support
- 12 Microchip Devices Code Protection Feature
- 13 Legal Notice
- 14 Quality Management System
- 15 Worldwide Sales and Service
- 16 Documents / Resources
 - 16.1 References
- 17 Related Posts

Introduction

This document provides the description and operating procedures for Microchip’s dual output 55V/30W and 5V/25W board from 36V–54V input EV96C70A. This board type is used for evaluating the performance of Microchip PoE systems and the Microchip PWM controller LX7309, which is an integral part of Microchip PoE PD controllers PD70201 and PD70211.

Microchip’s PD70201 and PD70211 devices are a part of a family of devices that support the IEEE® 802.3af, IEEE 802.3at, and HDBaseT standards PD interface.

The PD interface includes the following family of devices.

Table 1. Microchip Powered Device Products Offerings


Part	Type	Package	®IEEE 802.3af	IEEE 802.3at	HDBaseT (PoH)	UPoE
PD70100	Front end	3 mm × 4 mm 12L DFN	x	—	—	—
PD70101	Front end + PWM	5 mm × 5 mm 32L QFN	x	—	—	—
PD70200	Front end	3 mm × 4 mm 12L DFN	x	x	—	—
PD70201	Front end + PWM	5 mm × 5 mm 32L QFN	x	x	—	—
PD70210	Front end	4 mm × 5 mm 16L DFN	x	x	x	x
PD70210A	Front end	4 mm × 5 mm 16L DFN	x	x	x	x
PD70210AL	Front end	5 mm × 7 mm 38L QFN	x	x	x	x
PD70211	Front end + PWM	6 mm × 6 mm 36L QFN	x	x	x	x
PD70224	Ideal diode bridge	6 mm × 8 mm 40L QFN	x	x	x	x

Microchip's EV96C70A evaluation board provides designers with the environment needed for evaluating the performance and implementation of PoE PD applications.

The board uses two PWM LX7309, which are an integral part of Microchip PD controllers PD70201 and PD70211.

This document provides all necessary procedures and instructions to install and operate this board.

Figure 1. EV96C70A Block Diagram

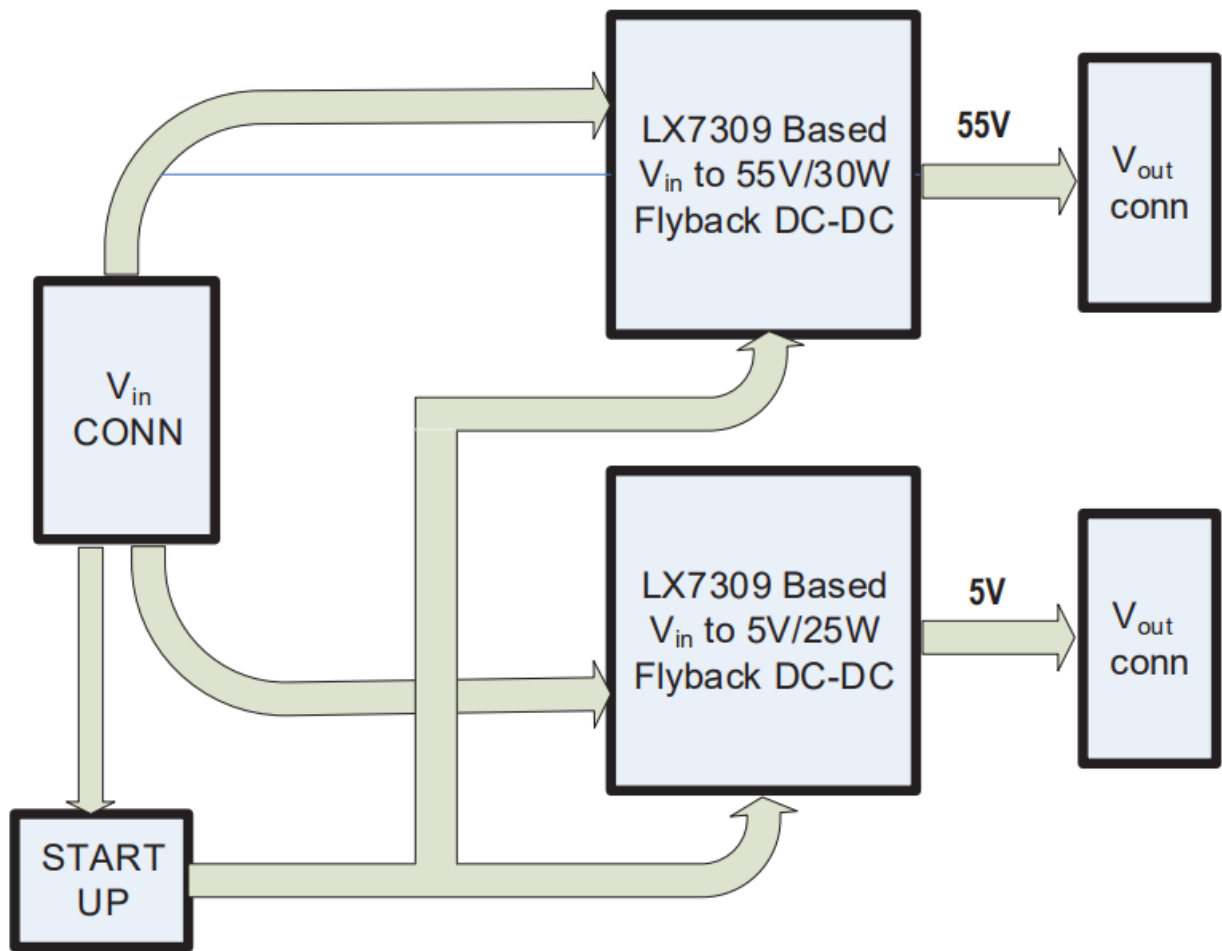


The board can be powered through an input connector J6 by a lab supply or by an output of PoE PD front end. See section 1.3. Electrical Characteristics for the input voltage range. The external load is connected to the evaluation board using the J1 (5V/25W) and J7 (55V/30W) output connectors. The following figure shows the location of input and output connectors.

D5 is the 55V indication LED and D9 is the 5V indication LED. These LEDs indicate the presence of the corresponding outputs.

The following figure shows a top view of the evaluation board.

Figure 2. EV96C70A Evaluation Board

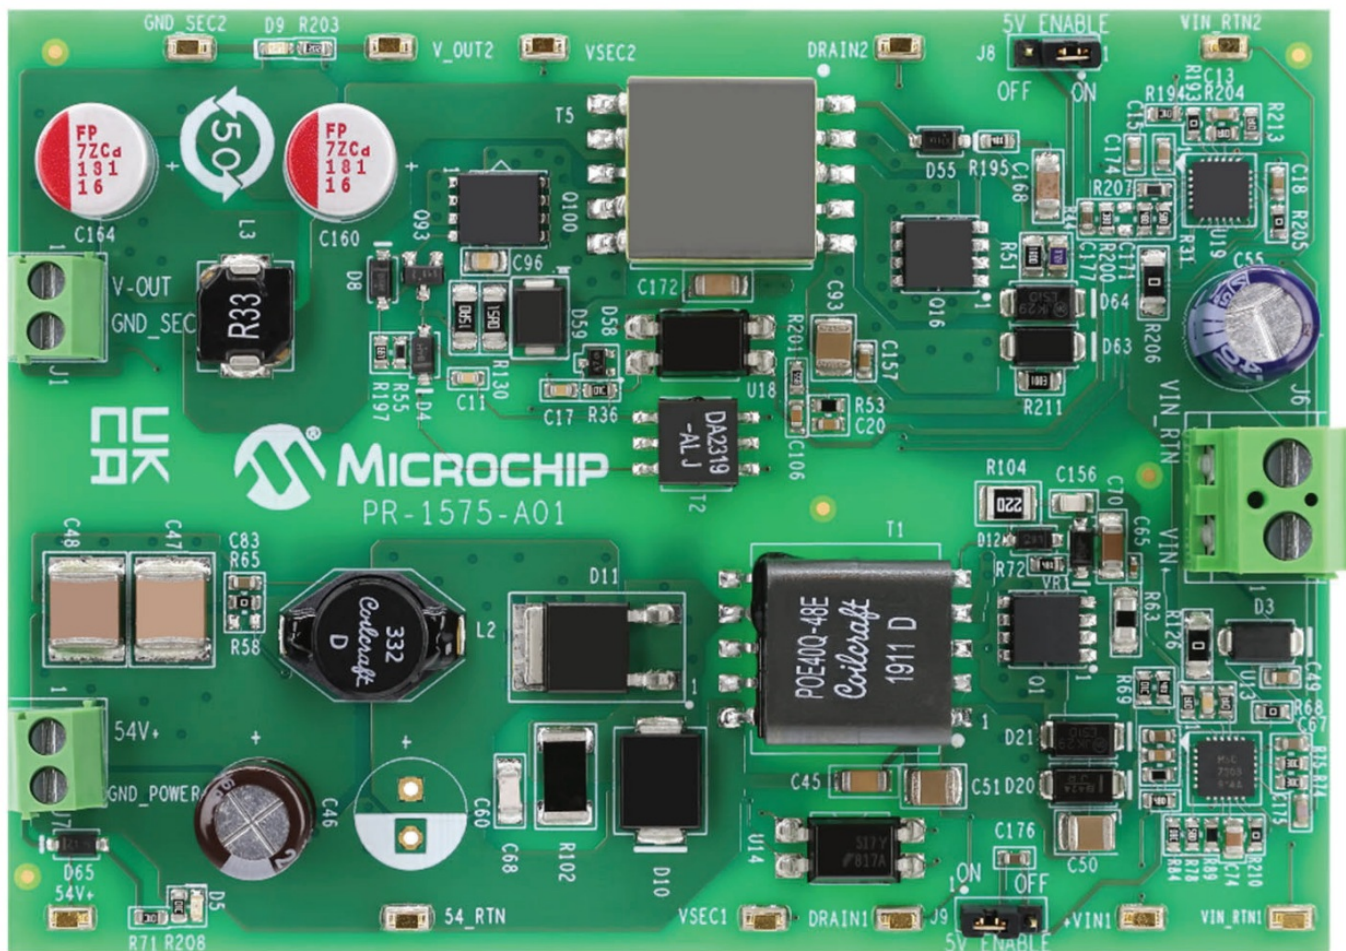

Product Overview

This section provides the product overview of the evaluation board.

Evaluation Board Features

- Input DC voltage connector and two output voltage connectors.
- Onboard “output present” LED indicators.
- 36 VDC to 54 VDC input voltage range.
- Evaluation board working temperature: 0 °C to 70 °C.
- RoHS compliant.

Evaluation Board Connectors

The following table lists the evaluation board connectors.

Table 1-1. Connector Details

#	Connector	Name	Description
1	J6	Input connector	Terminal block for connecting DC Input 36V to 54V.
2	J1	Output connector	Terminal block for connecting a load to 5V output.
3	J7	Output connector	Terminal block for connecting a load to 55V output.

Input Connector

The following table lists pinout of input connector.

Table 1-2. J1 Connector

Pin No.	Signal Name	Description
Pin 1	VIN	Positive input voltage 36 V _{DC} to 54 V _{DC} .
Pin 2	VIN_RTN	Return of input voltage.

- Manufacturer: On Shore Technology.
- Manufacturer part number: ED700/2.

Output Connectors

An external load is connected to the evaluation board using the J1 and J7 output connectors. The following tables list pinouts of the output connector.

The manufacturer and manufacturer part number details of the J1 and J7 output connectors are as follows:

- Manufacturer: Kaifeng Electronic.
- Manufacturer part number: KF350V-02P-14.

Table 1-3. J1 Connector

Pin No.	Signal Name	Description
Pin 1	VOUT	Positive DC/DC output voltage 5V.
Pin 2	VOUT_RTN	Return of 5V output.

Table 1-4. J7 Connector

Pin No.	Signal Name	Description
Pin 1	VOUT	Positive DC/DC output voltage 55V.
Pin 2	VOUT_RTN	Return of 55V output.

Electrical Characteristics

The following table lists the electrical characteristics of the EV96C70A evaluation board.

Table 1-5. Electrical Characteristics

	Min.	Max.	Unit
Input at J6	36	57	V
Output voltage at J1	4.8	5.25	V
Maximum output current at J1	—	5	A
Port J1 isolation to input	1500	—	VRMS
Output voltage at J7	54	56	V
Maximum output current at J7	—	0.55	A
Port J7 isolation to input	1500	—	VRMS
Port J1 isolation to port J7	1500	—	VRMS
Ambient temperature	0	70	°C

Installation

This section provides information about the installation procedure of the EV96C70A evaluation board.

Note: Ensure that power source of the board is turned OFF before all peripheral devices are connected.


Initial Configuration


Perform the following steps for initial configuration:

1. Connect load to the board (using J1 and J7).
2. Connect a DC supply to input connector J6.
3. Turn ON the DC supply.

Schematic

Figure 3-1. Schematic

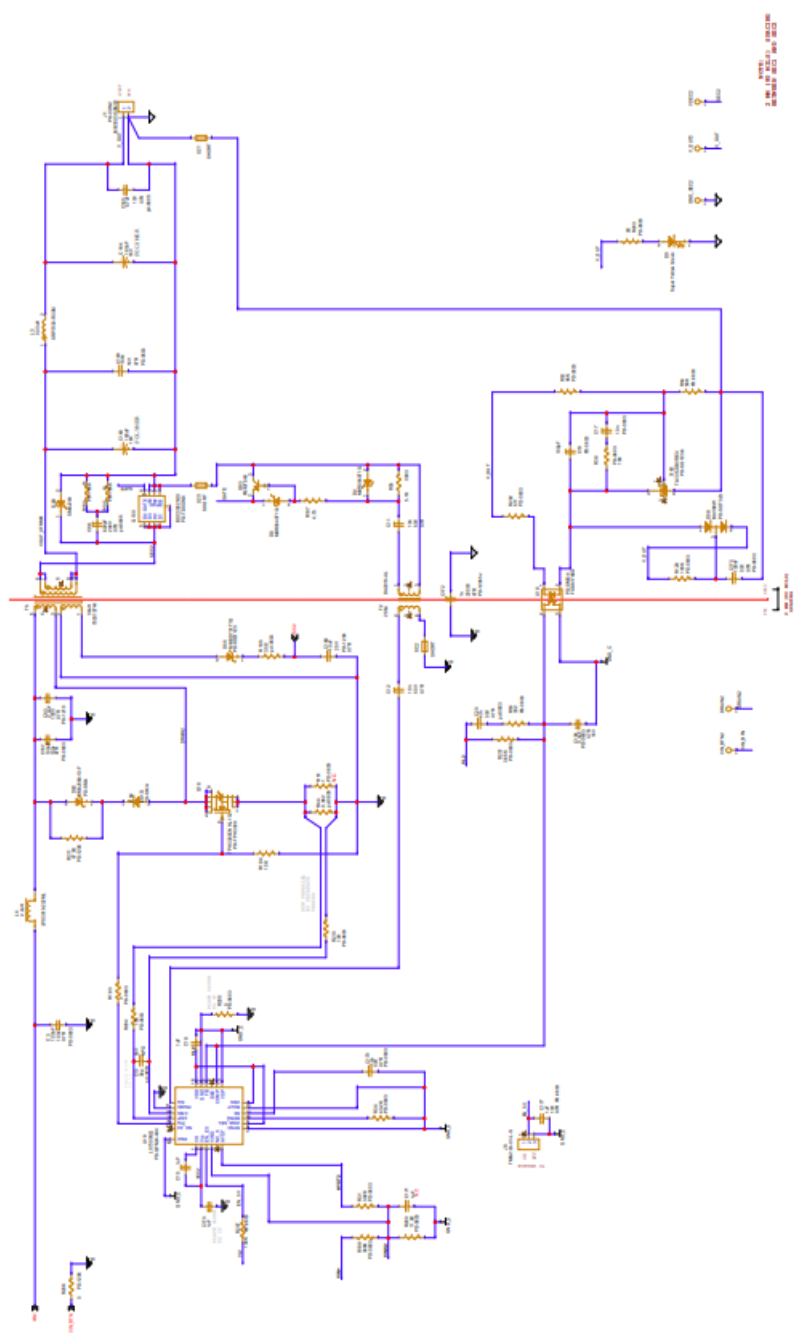

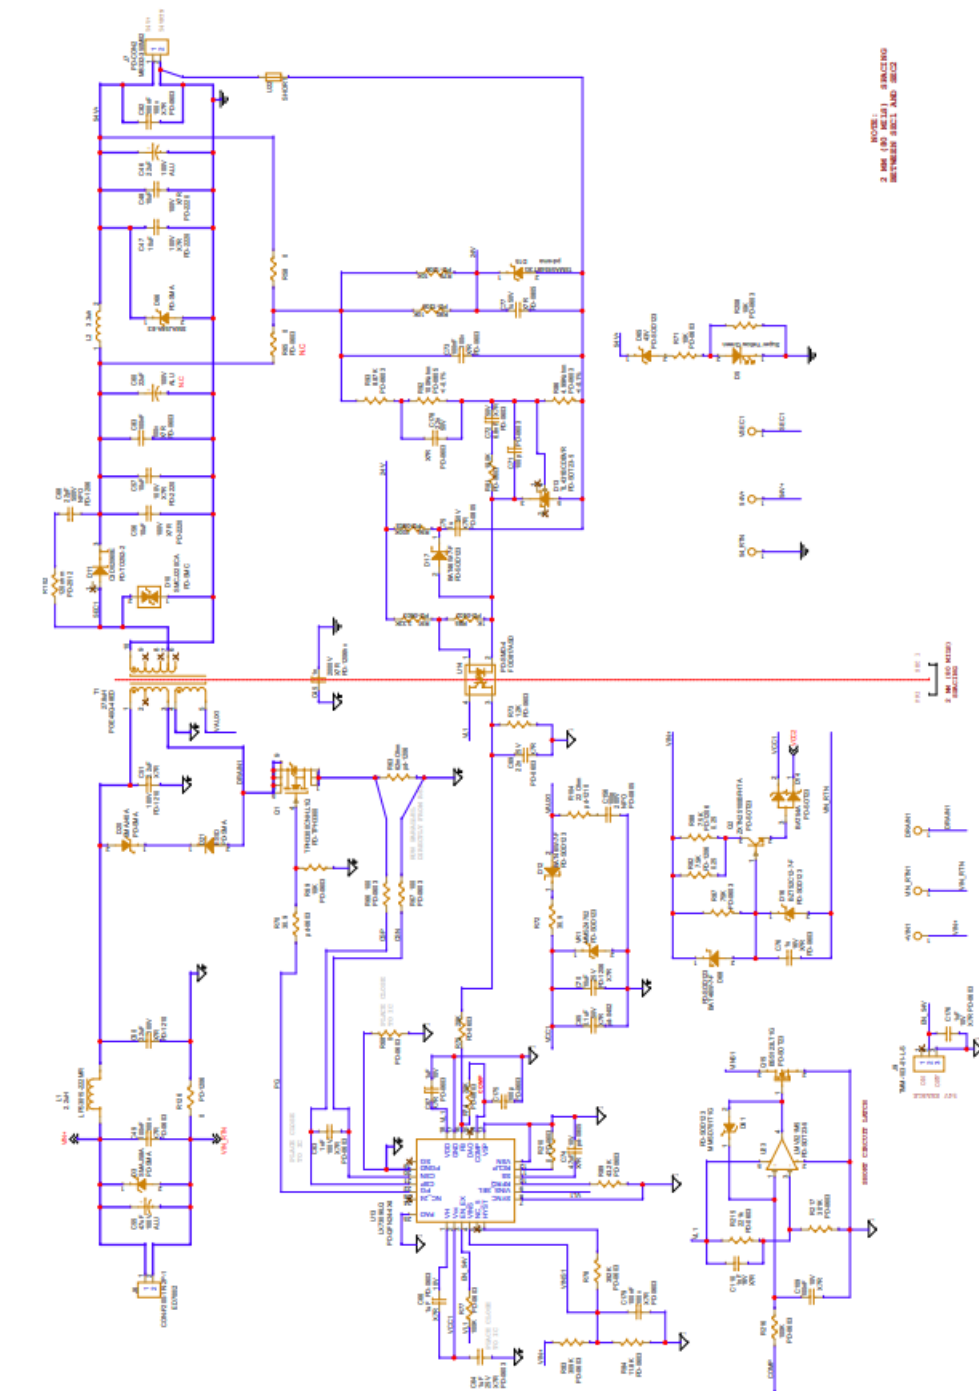

Bill of Materials

The following table lists the bill of materials.

Table 4-1. Bill of Materials

Item	Qty	Reference	Value	Description	Part Number	Manufacturer
		VSEC1	HK-2-G-S05	TEST POINT	HK-2-G-S05	MAC-8

1	10	VIN_RT N1	HK-2-G-S05	TEST POINT	HK-2-G-S05	MAC-8
		DRAIN1	HK-2-G-S05	TEST POINT	HK-2-G-S05	MAC-8
		V_OUT2	HK-2-G-S05	TEST POINT	HK-2-G-S05	MAC-8
		VSEC2	HK-2-G-S05	TEST POINT	HK-2-G-S05	MAC-8
		VIN_RT N2	HK-2-G-S05	TEST POINT	HK-2-G-S05	MAC-8
		GND_SE C2	HK-2-G-S05	TEST POINT	HK-2-G-S05	MAC-8
		DRAIN2	HK-2-G-S05	TEST POINT	HK-2-G-S05	MAC-8
		54_RTN	HK-2-G-S05	TEST POINT	HK-2-G-S05	MAC-8
		54V+	HK-2-G-S05	TEST POINT	HK-2-G-S05	MAC-8
2	7	C3	100 nF	Capacitor, X7R, 100 nF, 100V, 10 % 0603	06031C104KAT2A	AVX
		C49	100 nF	Capacitor, X7R, 100 nF,100V, 10 % 0603	06031C104KAT2A	AVX
		C73	100 nF	Capacitor, X7R, 100 nF,100V, 10 % 0603	06031C104KAT2A	AVX
		C82	100 nF	Capacitor, X7R, 100 nF, 100V, 10 % 0603	06031C104KAT2A	AVX
		C83	100 nF	Capacitor, X7R, 100 nF,100V, 10 % 0603	06031C104KAT2A	AVX

		C157	100nF	Capacitor, X7R, 100nF,100v, 10 % 0603	06031C104KAT2A	AVX
		C179	100 nF	Capacitor, X7R, 100 nF,100V, 10 % 0603	06031C104KAT2A	AVX
3	3	C11	10n	CAP CRM 10 nF, 50V, 10%X7R 0603 SMT	MCH185CN103KK	Rohm
		C12	10n	CAP CRM 10 nF, 50V, 10%X7R 0603 SMT	MCH185CN103KK	Rohm
		C17	10n	CAP CRM 10 nF 50V 10%X7R 0603 SMT	MCH185CN103KK	Rohm
4	1	C13	36p	CAP CRM 36 pF, 50V, 5% C0G 0603 SMT	06035A360JAT2A	AVX
5	4	C15	1 μ F	Capacitor, X7R, 1 μ F, 25V, 10% 0603	GRM188R71E105K A12D	Murata
		C18	1 μ F	Capacitor, X7R, 1 μ F, 25V, 10% 0603	GRM188R71E105K A12D	Murata
		C171	1 μ F	Capacitor, X7R, 1uF, 25V, 10% 0603	GRM188R71E105K A12D	Murata
		C174	1 μ F	Capacitor, X7R, 1 μ F, 25V, 10% 0603	GRM188R71E105K A12D	Murata
6	1	C19	100 pF	CAP COG 100 pF, 50V, 5% 0603	C1608C0G1H101J	TDK
7	1	C20	47n	CAP CRM 47n, 50V, 0603	CL10B473KB8NNN C	Samsung
8	1	C45	1n	CAP CRM 1 nF/2000V, 10% X7R 1206	C1206C102KGRAC	Kemet

9	2	C46	22 μ F	CAP ALU 22 μ F, 100V, 20%8X11.5 105C	EEUFC2A220	Panasonic
		C60	22 μ F	CAP ALU 22 μ F, 100V, 20%8X11.5 105C	EEUFC2A220	Panasonic

10	4	C47	10 μ F	CAP CER 10 μ F, 100V, 20% X7R 2220	22201C106MAT2A	AVX
		C48	10 μ F	CAP CER 10 μ F, 100V, 20% X7R 2220	22201C106MAT2A	AVX
		C56	10 μ F	CAP CER 10 μ F, 100V, 20% X7R 2220	22201C106MAT2A	AVX
		C57	10 μ F	CAP CER 10 μ F, 100V, 20% X7R 2220	22201C106MAT2A	AVX
11	2	C50	2.2 μ F	CAP CRM 2.2 μ F, 100V, X7R 1210	C1210C225K1RAC TU	Kemet
		C51	2.2 μ F	CAP CRM 2.2 μ F, 100V, X7R 1210	C1210C225K1RAC TU	Kemet
12	1	C55	47 μ F	CAP ALU 47 μ F, 100V, 20% 105C	100PX47MEFCT78 X11.5	Rubicon
13	1	C63	1 nF	Cap 1 nF 100V 10% X7R 0603 S MT	CL10B102KC8NNN C	Samsung
14	1	C64	1 μ F	Cap 1nF 100V 10% X7R 0603 S MT	CL10B105KA8NNN C	Samsung
15	1	C65	0.1 μ F	CAP CRM 0.1 μ F, 50V, X7R 0603	UMK105B7104KV-FR	Taiyo Yuden
16	4	C66	1 μ F	Capacitor, X7R 1 μ F 10V, 10% 0603	GRM188R71A105K A61D	Murata
		C67	1 μ F	Capacitor, X7R, 1 μ F, 10V, 10% 0603	GRM188R71A105K A61D	Murata
		C176	1 μ F	Capacitor, X7R, 1 μ F, 10V, 10% 0603	GRM188R71A105K A61D	Murata

		C177	1 μ F	Capacitor, X7R, 1 μ F, 10V, 10% 0603	GRM188R71A105K A61D	Murata
17	1	C68	22 pF	CAP CRM 22 pF, 500V, 10% NP O 1206 SMT	VJ1206A220JXEAT	Vishay
18	1	C69	22n	CAP CRM 22 nF, 25V, 10%X7R 0603 SMT	VJ0603Y223KXXC W1BC	Vishay
19	2	C70	10 μ F	Capacitor, X7R, 10 μ F, 25V, 10% 1206	C1206C106K3RAC TU	Kemet
		C168	10 μ F	Capacitor, X7R, 10 μ F, 25V, 10% 1206	C1206C106K3RAC TU	Kemet
20	2	C71	100p	CAP CRM 100 pF 100V 5% NPO 0603 SMT	VJ0603A101JXBT	Vishay
		C175	100p	CAP CRM 100pF 100V 5%NPO 0603 SMT	VJ0603A101JXBT	Vishay
21	1	C72	6.8 nF	CAP CER 6.8 nF, 50V, 10% X7R 0603 SMT	06035C682KAT2A	AVX
22	2	C74	4.7 μ F	CAP CRM 4.7 μ F, 10V, 10%X7R 0805 SMT	0805ZC475KAT2A	AVX
		C165	4.7 μ F	CAP CRM 4.7 μ F, 10V, 10%X7R 0805 SMT	0805ZC475KAT2A	AVX
23	1	C75	1 μ	CAP CRM 1 μ F 50V 10% X7R 0805 SMT	UMK212B7105KG-T	Taiyo Yuden
24	1	C76	1 μ	CAP CRM 1 μ F, 16V, 10% 0805 X7R SMT	CL10B105KO8NNN C	Samsung
25	1	C77	1 μ	CAP CRM 1 μ F, 50V, 10% X7R 0805 SMT	GRM21BR71H105K A12L	Murata
26	1	C93	2.2 μ F	CAP CRM 2.2 μ F 100V X7R 1210	C3225X7R2A225K	TDK
27	1	C96	820 pF	CAP CRM 820p, 200V, X7R 0805	08052C821KAT2A	AVX

28	1	C106	3.3 nF	CAP CRM 3.3 nF, 16V, X7R 0603	C1608X7R1C332K	TDK
29	2	C109	100 nF	CAP CRM 100 nF, 10V, X7R 0603	GRM188R71H104KA01	Murata
		C173	100 nF	CAP CRM 100 nF, 10V, X7R 0603	GRM188R71H104KA01	Murata
30	1	C110	1 nF	CAP CRM 1 nF, 16V, X7R 0603	CL10B102KA8NNNC	Samsung
31	1	C156	100p	CAP CRM 100 pF, 200V, NPO 0805	08052A101KAT2A	AVX
32	2	C160	180 µF	CAP Polymer Alum. 180 µF, 16V, 20%	RL81C181MDN1KX	Nichicon

33	1	C163	100n	CAP CRM 100 nF 16V 10%X7R 0603 SMT	VJ0603Y104KXJC W1BC	Vishay
34	1	C170	10n	CAP CRM 10 nF, 50V, 10%X7R 0603 SMT	C1608X7R1H103K080AA	TDK
35	1	C172	1n	CAP CRM 1 nF/2000V, 10%++X7R 1206 SMT	1206B102K202CT	Walsin
36	1	C178	2.2n	CAP CRM 2.2 nF, 50V, 10%X7R 0603 SMT	C0603C222K5RAC	Kemet
37	1	D3	SMAJ58A	DIO TVS 58V, 40A, SRG400WPK SMA SMT	SMAJ58A	Vishay
38	2	D4	MBR0540T1G	DIO SCHOTTKY 40V, 500 mA, SOD123 REC. SMT	MBR0540T1G	ON Semi

		D8	MBR0540T1G	DIO SCHOTTKY 40V, 500 mA, SOD123 REC. SMT	MBR0540T1G	ON Semi
39	2	D5	LED	LED SuperYelGrn 100-130o 0603 SMD	19-21-SYGCS530E 3TR8	Ever light
		D9	LED	LED SuperYelGrn 100-130o 0603 SMD	19-21-SYGCS530E 3TR8	Ever light
40	1	D10	SMCJ220CA	TVS DIODE Bidirectional 220V WM 356VC SMC	SMCJ220CA	Littelfuse
41	1	D11	C3D02060E	Diode Schottky Zero Recovery 600V DPAK	C3D02060E	Cree Inc
42	3	D12	BAT46W-7-F	Diode Schottky 100V, 150 mA, SOD123F	BAT46W-7-F	Diodes Inc .
		D17	BAT46W-7-F	Diode Schottky 100V, 150 mA, SOD123F	BAT46W-7-F	Diodes Inc .
		D68	BAT46W-7-F	Diode Schottky 100V, 150 mA , SOD123F	BAT46W-7-F	Diodes Inc .
43	1	D13	TL431BCDBVR	IC AdjPrec Shunt Reg 2.5V, 0.5 %, SOT23-5	TL431BCDBVR	TI
44	1	D14	BAT54A	DIO Schottky 30V 200 mASOT23	BAT54A	Philips
45	1	D15	1SMA5934BT3G	DIODE ZENER 24V, 1.5W, SMA SMT	1SMA5934BT3G	ON Semi

46	1	D16	BZT52C12-7-F	DIO ZENER 12V, 500 mW, SOD 123 SMT	BZT52C12-7-F	Diodes Inc .
47	1	D20	SMAJ40A	DIODE TVS 40V, 400W, 5 μ A, 6. 2A	SMAJ40A	Bourns
48	2	D21	ES1D	DIODE ULTRA FAST 200V, 1A, DO-214AC	ES1D	Fairchild
		D64	ES1D	DIODE ULTRA FAST 200V, 1A, DO-214AC SMT	ES1D	Fairchild
49	2	D55	MMSD701T1G	DIODE SCHOTTKY 70V 0.2A, 2 25W, SOD123	MMSD701T1G	ON Semi
		D61	MMSD701T1G	DIODE SCHOTTKY 70V 0.2A, 2 25W, SOD123	MMSD701T1G	ON Semi
50	1	D58	BAV99W	Diode, Dual Switching BAV99W SOT323	BAV99W	NXP
51	1	D59	SMBJ24A	TVS DIODE 24V 38.9V SMBJ	SMBJ24A	BRIGHTKI NG
52	1	D62	TL431CDBVRE 4	IC Prog Shunt Ref 2.5V, 2% SOT 23-5 SMT	TL431CDBVRE4	TI
53	1	D63	SMAJ58A-13-F	DIO TVS 58V 40A SRG400WPK SMA SMT	SMAJ58A-13-F	Diodes Inc .
54	1	D65	DDZ9717-7	Diode, Zener, 500 mW, 43V, 5% SOD123	DDZ9717-7	Diodes Inc .

55	1	D66	SMAJ58A-E3	DIO TVS 58V, 40A, SRG400WPK SMA SMT	SMAJ58A-E3	Vishay
56	2	J1	PD-CON2	Terminal block 2 Pole interlocking 3.5 mm pitch	MB332-350M02	DECA

		J7	PD-CON2	Terminal block 2 Pole interlocking 3.5mm pitch	MB332-350M02	DECA
57	1	J6	ED700/2	TERMINAL BLOCK 5MM 2POS PCB	ED700/2	On Shore Tech
58	2	J8	TMM-103-01-L -S	Con Male PIN Header 3P 2 mm Vertical SR TH	TMM-103-01-L-S	Samtec
		J9	TMM-103-01-L -S	Con Male PIN Header 3P 2 mm Vertical SR TH	TMM-103-01-L-S	Samtec
59	1	L1	2.2 μ H	Power Inductors 2.2 μ Hy, 1.5A, 1 10m SMT	LPS3015-222MR	Coilcraft
60	1	L2	3.3 μ H	Inductor 3.3 μ H, 0.015R, 6.4A, S MT	L0-3316-3R3-RM	ICE Comp
61	1	L3	0.33 μ H	Power Inductor 0.33 μ H, 20A , S hilded SMT	SRP7030-R33M	Bourns
62	1	L4	2.2 μ H	Power Inductors 2.2 μ Hy, 1.5A , 110m Ω	LPS3015-222ML	Coilcraft

63	2	Q1	TPH3300CNH, L1Q	MOSFET N-CH 150V, 18A 8-SO P	TPH3300CNH,L1Q	Toshiba
		Q16	TPH3300CNH, L1Q	MOSFET N-CH 150V, 18A 8-SO P	TPH3300CNH,L1Q	Toshiba
64	1	Q2	ZXTN25100BF HTA	TRANSISTOR NPN 100V, 3A, S OT23-3 SMT	ZXTN25100BFHTA	Diodes Inc .
65	1	Q15	BSS123LT1G	FET NCH 100V 0.15A 6RLogic L evel SOT23	BSS123LT1G	ON Semi
66	1	Q93	FMMT549	TRN PNP -30V -1A SOT23	FMMT549	Fairchild
67	1	Q100	BSC0902NSI	MOSFET N-Ch 30V, 100A, TDS ON-8	BSC0902NSI	Infineon
68	2	R31	392K	RES 392K, 0.1W, 1%, 0603 SMT MTL FLM	RC0603FR-07392K L	Yageo
		R78	392K	RES 392K, 0.1W 1%, 0603 SMT MTL FLM	RC0603FR-07392K L	Yageo
69	1	R34	43.2K	RES 43.2K, 100 mW, 0603SMT 1%	ERJ3EKF4322V	Panasonic
70	1	R36	10K	RES 10K 62.5 mW 1% 0603 SM T MTL FLM	RC0603FRF-0710K L	Yageo

71	1	R44	0.082	RES 0.082Ω 1/4W 1% 0805 SMT	UR732ATTD82L0F	KOA
72	1	R51	1	RES 1R 125mW 1% 0805 SMT MTL FLM	RC0805FR-071R	Yageo
73	2	R52	56K	Resistor, SMT 56K, 1%, 1/10W 0 603	CRCW060356K0FK EA	Vishay
		R54	56K	Resistor, SMT 56K, 1%, 1/10W 0 603	CRCW060356K0FK EA	Vishay
74	1	R53	332	RES 332R 62.5 mW 1% 0603 S MT MTL FLM	RC0603FRF07332R	Yageo
75	1	R55	5.1K	RES TCK FLM 5.1K, 62.5 mW, 1 % 0603 SMT	CRCW06035K1FKE A	Vishay
76	4	R58	0	RES TCK FLM 0R 62.5 mW, 5% 0603 SMT	ERJ3GEY0R00V	Panasonic
		R65	0	RES TCK FLM 0R 62.5 mW, 5% 0603 SMT	ERJ3GEY0R00V	Panasonic
		R68	0	RES TCK FLM 0R 62.5mW, 5% 0 603 SMT	ERJ3GEY0R00V	Panasonic
		R210	0	RES TCK FLM 0R 62.5 mW, 5% 0603 SMT	ERJ3GEY0R00V	Panasonic

77	1	R63	62 mΩ	RES .062Ω, 1/2W, 1%, 1206 SMT	ERJ8BWFR062V	Panasonic
----	---	-----	-------	-------------------------------	--------------	-----------

78	4	R66	100	RES TCK FLM 100R 62.5mW 1 % 0603 SMT	RC0603FR-07100RL	Yageo
		R67	100	RES TCK FLM 100R, 62.5 mW, 1 % 0603 SMT	RC0603FR-07100RL	Yageo
		R204	100	RES TCK FLM 100R, 62.5 mW, 1 % 0603 SMT	RC0603FR-07100RL	Yageo
		R213	100	RES TCK FLM 100R 62.5 mW 1 % 0603 SMT	RC0603FR-07100RL	Yageo
79	1	R69	10K	RES 10K 62.5 mW 1% 0603 SMT MTL FLM	RC1608F1002CS	Samsung
80	2	R70	30.9	Resistor, 30.9R, 1%, 1/10W, 0603	CRCW060330R9FKEA	Vishay
		R72	30.9	Resistor, 30.9R, 1%, 1/10W, 0603	CRCW060330R9FKEA	Vishay
81	2	R71	10K	RES 10K, 62.5mW, 1% 0603 SMT MTL FLM	CR16-1002FL	ASJ
		R208	10K	RES 10K, 62.5 mW, 1% 0603 SMT MTL FLM	CR16-1002FL	ASJ
82	1	R73	1.2K	Resistor, SMT 1.2K, 5% 1/10W 0603	CRCW06031K20JNEA	Vishay
83	2	R74	20K	RES 20K, 62.5 mW, 1% 0603 SMT MTL FLM	ERJ3EKF2002V	Panasonic
		R75	20K	RES 20K 62.5mW 1% 0603 SMT MTL FLM	ERJ3EKF2002V	Panasonic
		R77	100K	RES 100K 62.5 mW 1% 0603 SMT MTL FLM	MCR03EZPFX1003	Rohm

84	4	R81	100K	RES 100K, 62. 5 mW, 1% 0603 S MT MTL FLM	MCR03EZPFX1003	Rohm
		R94	100K	RES 100K 62.5 mW, 1% 0603 S MT MTL FLM	MCR03EZPFX1003	Rohm
		R207	100K	RES 100K 62.5 mW, 1% 0603 S MT MTL FLM	MCR03EZPFX1003	Rohm
85	2	R79	10K	RES 10K, 250 mW, 1% 1206 SM T MTL FLM	RC1206FR-0710KL	Yageo
		R80	10K	RES 10K 250 mW, 1% 1206 SM T MTL FLM	RC1206FR-0710KL	Yageo
86	2	R82	7.5K	RES 7.5K 250 mW, 1% 1206 SM T MTL FLM	CR1206-FX- 7501ELF	Bourns
		R88	7.5K	RES 7.5K 250 mW, 1% 1206 SM T MTL FLM	CR1206-FX- 7501ELF	Bourns
87	2	R83	309K	RES 309K 62.5 mW, 1% 0603 S MT MTL FLM	RC0603FR-07309K L	Yageo
		R199	309K	RES 309K 62.5 mW, 1% 0603 S MT MTL FLM	RC0603FR-07309K L	Yageo
88	2	R84	11.8K	RES 11.8K 0.1W 1% 0603 SMT MTL FLM	RC1608F1182CS	Samsung
		R200	11.8K	RES 11.8K, 0.1W, 1% 0603 SMT MTL FLM	RC1608F1182CS	Samsung
89	1	R85	1K	RES TCK FLM 1K, 1%, 62.5 mW, 0402 SMT, 100 PPM	CR0402-FX-1001G LF	Bourns

115	1	U13	LX7309ILQ	Synchronous Flyback DC/DC Controller	LX7309ILQ	Microchip
116	1	U19	LX7309ILQ	Synchronous Flyback DC/DC Controller	LX7309ILQ	Microchip
117	1	U14	FOD817ASD	OPTOISOLATOR 5 KV TRANSISTOR 4 SMD	FOD817ASD	Fairchild
118	1	U18	FOD817ASD	OPTOISOLATOR 5 KV TRANSISTOR 4 SMD	FOD817ASD	Fairchild
119	1	U23	LMV321M5	IC OPAMP SINGLE RAIL-RAIL SOT23-5	LMV321M5	National
120	1	VR1	MMSZ4702	DIODE ZENER 15V 500MW SOD123	MMSZ4702	Fairchild

Note: Third-party components can be replaced by approved equivalents. N.C = not installed (optional).

Board Layout

This section describes the layout of the evaluation board. This is a four-layer board with 2 Oz copper. The following figures show the silk of the board for tracking devices placements.

Figure 5-1. Top Silk

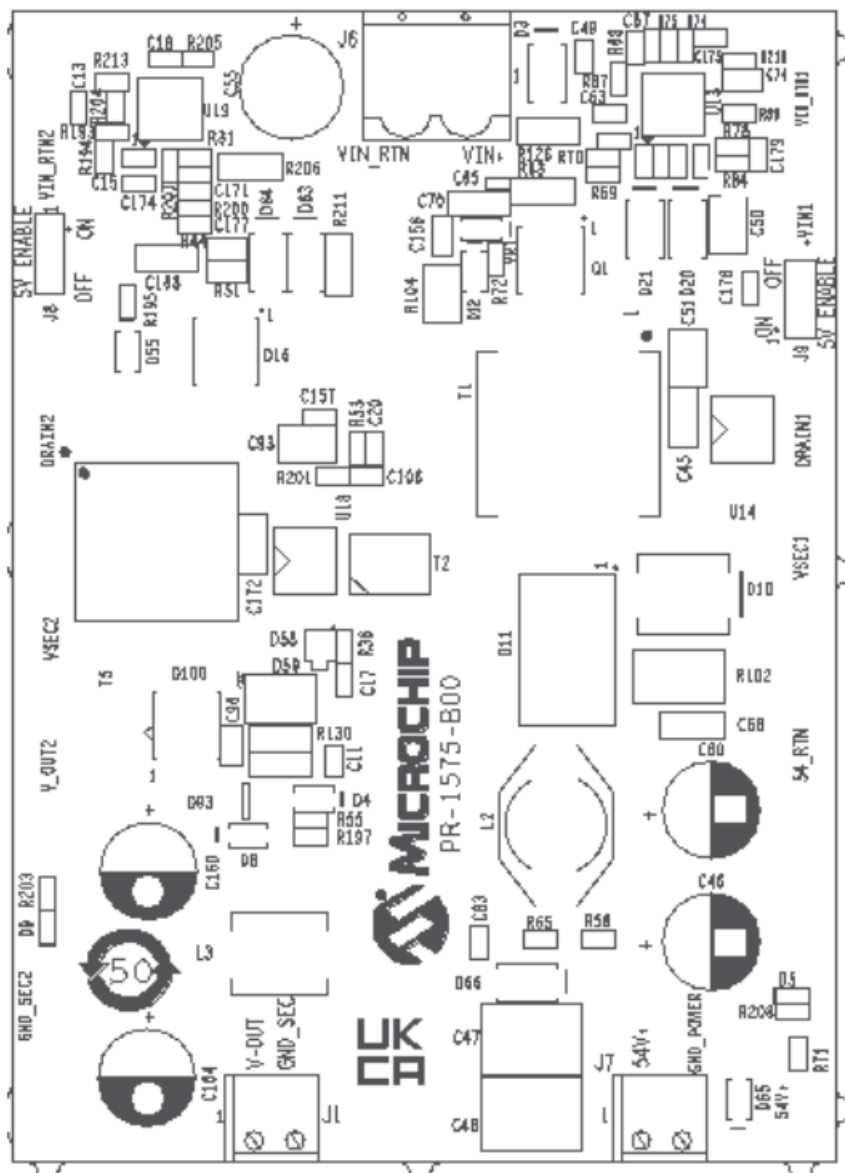


Figure 5-2. Bottom Silk


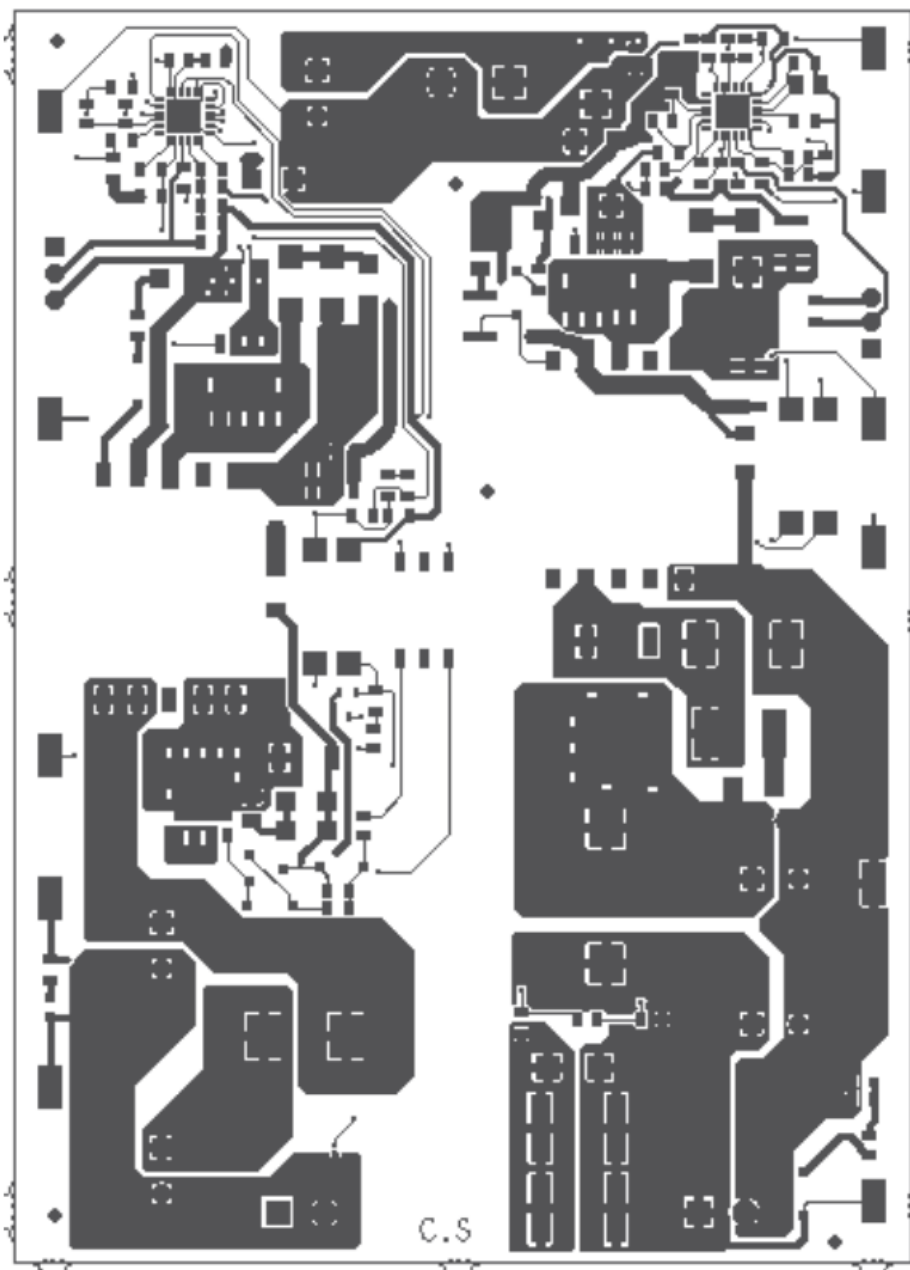


Figure 5-4. Bottom Copper

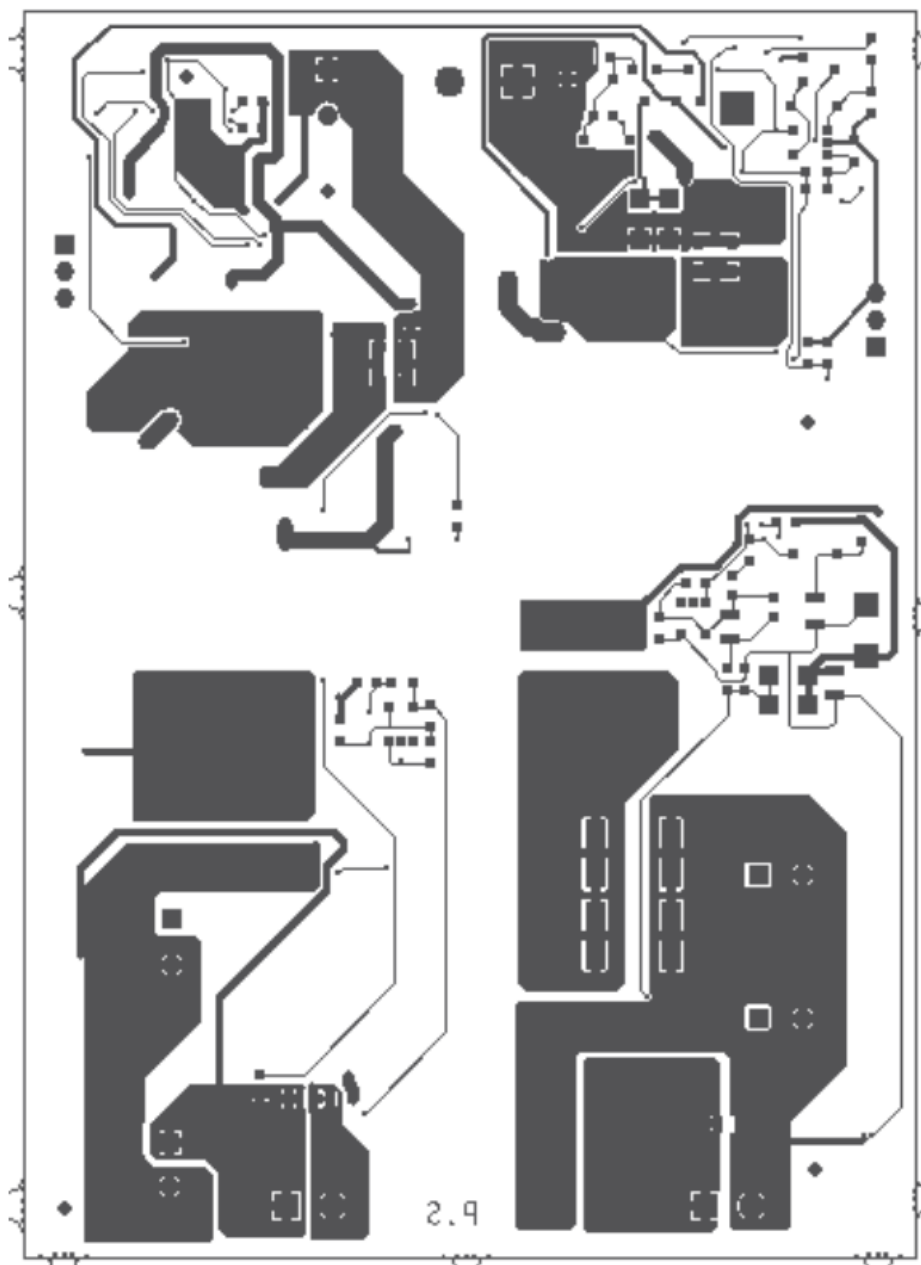

Ordering Information

The following table lists the evaluation board ordering information.

Table 6-1. Evaluation Board Ordering Information

Ordering Number	Description
EV96C70A	55W Dual Output Isolated Fullback Converter from 36V to 54V input.

Revision History

Revision	Date	Description
B	03/2022	Following is the summary of changes made in this revision: • Updated Figure 3-1. • Updated item 95 in Table 4-1.
A	01/2022	Initial revision.

The Microchip Website

Microchip provides online support via our website at www.microchip.com/. This website is used to make files and information easily available to customers. Some of the content available includes:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQs), technical support requests, online discussion groups, Microchip design partner program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

Product Change Notification Service

Microchip's product change notification service helps keep customers current on Microchip products. Subscribers will receive email notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, go to www.microchip.com/pcn and follow the registration instructions.

Customer Support

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Embedded Solutions Engineer (ESE)
- Technical Support

Customers should contact their distributor, representative or ESE for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in this document.

Technical support is available through the website at: www.microchip.com/support

Microchip Devices Code Protection Feature

Note the following details of the code protection feature on Microchip products:

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner, within operating specifications, and under normal conditions.
- Microchip values and aggressively protects its intellectual property rights. Attempts to breach the code protection features of Microchip product is strictly prohibited and may violate the Digital Millennium Copyright Act.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is “unbreakable”. Code protection is constantly evolving. Microchip is committed to continuously improving the code protection features of our products.

Legal Notice

This publication and the information herein may be used only with Microchip products, including to design, test, and integrate Microchip products with your application. Use of this information in any other manner violates these terms. Information regarding device applications is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. Contact your local Microchip sales office for additional support or, obtain additional support t at www.microchip.com/en-us/support/design-help/client-support-services.

THIS INFORMATION IS PROVIDED BY MICROCHIP “AS IS”. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL LOSS, DAMAGE, COST, OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP’S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION.

Use of Microchip devices in life support and/or safety applications is entirely at the buyer’s risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Quality Management System

For information regarding Microchip’s Quality Management Systems, please visit www.microchip.com/quality.

Worldwide Sales and Service

AMERICAS

Corporate Office

2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277

Technical Support:

www.microchip.com/support

Web Address:

www.microchip.com

Atlanta

Duluth, GA

Tel: 678-957-9614

Fax: 678-957-1455

Austin, TX

Tel: 512-257-3370

Boston

Westborough, MA

Tel: 774-760-0087

Fax: 774-760-0088

Chicago

Itasca, IL

Tel: 630-285-0071

Fax: 630-285-0075

Dallas

Addison, TX

Tel: 972-818-7423

Fax: 972-818-2924

Detroit

Novi, MI

Tel: 248-848-4000

Houston, TX

Tel: 281-894-5983

Indianapolis

Noblesville, IN

Tel: 317-773-8323

Fax: 317-773-5453

Tel: 317-536-2380

Los Angeles

Mission Viejo, CA

Tel: 949-462-9523

Fax: 949-462-9608

Tel: 951-273-7800

Raleigh, NC

Tel: 919-844-7510

New York, NY

Tel: 631-435-6000

San Jose, CA

Tel: 408-735-9110

Tel: 408-436-4270

Canada – Toronto

Tel: 905-695-1980

Fax: 905-695-2078



	MICROCHIP EV96C70A 55W Dual Output Converter from 36V-54V Input EVB [pdf] User Guide EV96C70A 55W Dual Output Converter from 36V 54V Input EVB, EV96C70A, 55W Dual Output Converter from 36V 54V Input EVB, 36V 54V Input EVB
---	--

References

-  [Microchip Technology](#)
-  [Empowering Innovation | Microchip Technology](#)
-  [Empowering Innovation | Microchip Technology](#)
-  [Support | Microchip Technology](#)
-  [Product Change Notification | Microchip Technology](#)
-  [Quality | Microchip Technology](#)
-  [Microchip Lightning Support](#)
-  [Client Support Services | Microchip Technology](#)