




# MOMAN CP2 1-Trigger-2 Wireless Phone Microphone User Manual

[Home](#) » [MOMAN](#) » MOMAN CP2 1-Trigger-2 Wireless Phone Microphone User Manual 



CP2  
1-Trigger-2  
Wireless Phone Microphone



Thank you for choosing MOMAN product. Please read this manual carefully before use and follow all instructions mentioned herein.

## Contents

- [1 Caring For Your MOMAN Product](#)
- [2 Package List](#)
- [3 Product Introduction](#)
- [4 Operation](#)
- [5 Specifications](#)
- [6 Documents / Resources](#)


## Caring For Your MOMAN Product

- Please keep the product in a dry, clean, dust-free environment
- Keep corrosive chemicals, liquids and heat source away from the product to prevent mechanics damage.
- Use only a soft and dry cloth for leaning the product.
- Malfunction may be caused by dropping, impact of external force.
- Do not attempt to disassemble the product. Doing so voids warranty.
- Please have the product checked or repaired by authorized technicians if any malfunctions happened.
- Failure to follow all the instructions may result in mechanics damage.
- Warranty does not apply to human errors.

## Package List




TX Transmitter  
x2



RX Receiver x1  
[x2 for CP2(AC)]



Charging  
Case x1




Type-C  
Charging  
Cable x1




Type-C to USB  
Adapter [Not  
included with  
CP2(A)]

## Product Introduction

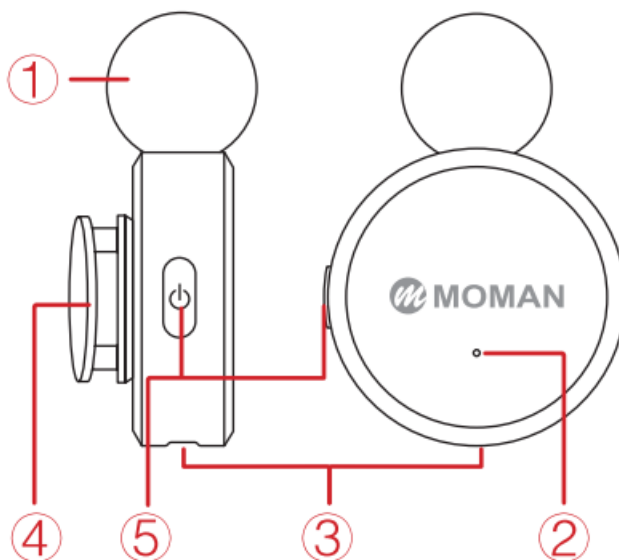

### Transmitter


- (1) Foam Windscreen
- (2) Transmitter Indicator Light
- (3) Transmitter Charging Port
- (4) Clip
- (5) Power/Mute Button

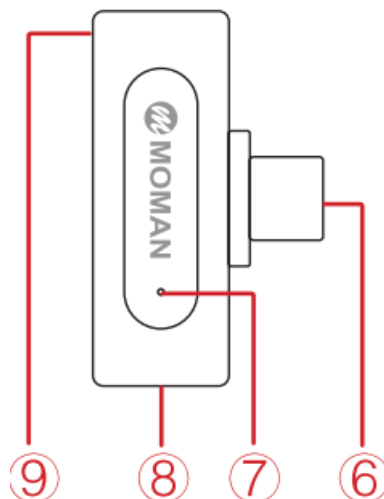

### Receiver

- (6) Phone Connector(Type-C or Lightning)

- (7) Receiver Indicator Light
- (8) Type-C or Lightning Port
- (9) Strap Hole

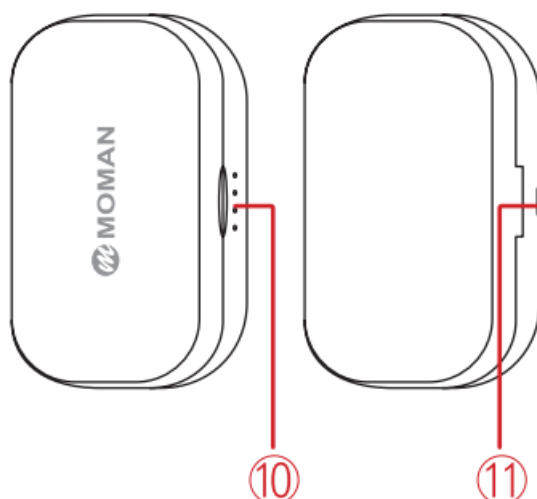





### Charging Case

- (10) Charging Case Indicator
- (11) Type-C Charging Port



### Indicator- TX Transmitter

Function/Status	Operation	Light
Power on	Press power button 3s	● Green keep on
Power off	Press power button 3s	● Light off
Unconnected	/	✱✱ Red and green lights flash alternately
Connected	/	●● Red light off green light on
Switching noise reduction	Switching with the click of power button	✱ Level 1: Green light flashes 1 time ✱✱ Level 2: Green light flashes 2 times ✱✱✱ Level 3: Green light flashes 3 times
Reverberation	/	✱ → ● Red light flashes once then green light on
Mute	Double click on the power button to mute and double click again to resume	✱ Green light flashing, Red light off
Charging	/	● Red light on, Green light off
Fully charged	/	● All light off
Low battery	/	✱ Red light flashes once every 10s Green light off

\* Indicator- RX Receiver

Function/Status	Operation	Light
Power on	Plug into devices ports	 Red light Flash
Power off	Pull out devices ports	 Light Off
Unconnected	/	 Red light Flash
Connected	/	 Red light keep on

### Indicator- Charging Case

Function/Status	Light
Charging & Fully Charged	 White flashes. The flashing light moves in proportion to the charge until it is fully charged.
Low Battery	 Power indicator lights up for 5S and then turns off

### Operation

. TX

#### 1. Power On/Off

On: Press the Power/Mute Button once.

Off: Long press the Power Mute Button for 3s.

#### 2. Pairing

With two transmitters ON, plug the receiver into device and the system will pair automatically

※ If the TX and RX are not connected or you need to replace the RX, re-pairing is required.

(1) With one TX ON, long press the Power/Mute Button for 8s until the the green light flashes quickly. Plug in the RX until the green light is on.

(2) Plug out the RX. Follow step(1) to pair the other TX and plug in the RX again until the green light is on.

When indicators of both TX show green, two- transmitter-one-receiver pairing is successful

Note: Before TX pairing, do not plug RX into device and power it. Otherwise, the pairing may not be successful

#### 3. Mute

After pairing, press the Power/Mute Button once to mute. Press it again to cancel mute.

#### 4. Charging

Place the TX in the case with contacts connected with the case's OR charge them via charging cable. Please fully charge the TX transmitter with charging cable before use.

#### 5. Noise Reduction

One Click off the button cycles through up to 3 levels of noise reduction and original sound in sequence, with a memory function that remembers the noise reduction level before the last switch off

## 6. Reverberation

The new Reverb function optimizes your sound and makes it more three- dimensional. Three clicks of the button toggles the reverb, which is not on by default, but needs to be tuned on manually, and exits the reverb after three clicks again.

## \* RX

### 1. Power On/Off

On: Plug in the device

Off: Plug out of the device

### 2. Connecting

Connect the receiver to phone.

※ Use the Type-C to USB Adapter to connect with computer.

※ OPPOVIVO/IQOO/Realme mobile phones can be used normally only when OTG function ( please search “OTG” on the settings) turns on


### 3. Pairing

With two transmitters ON, plug the receiver into device and the system will pair automatically

### 4. Charging

There is no battery in RX receiver and no need to recharge during live. If the phone is low power during live, it can be recharged directly through the Type-C or Lightning port on the RX receiver.

※ Some models do not support this function.

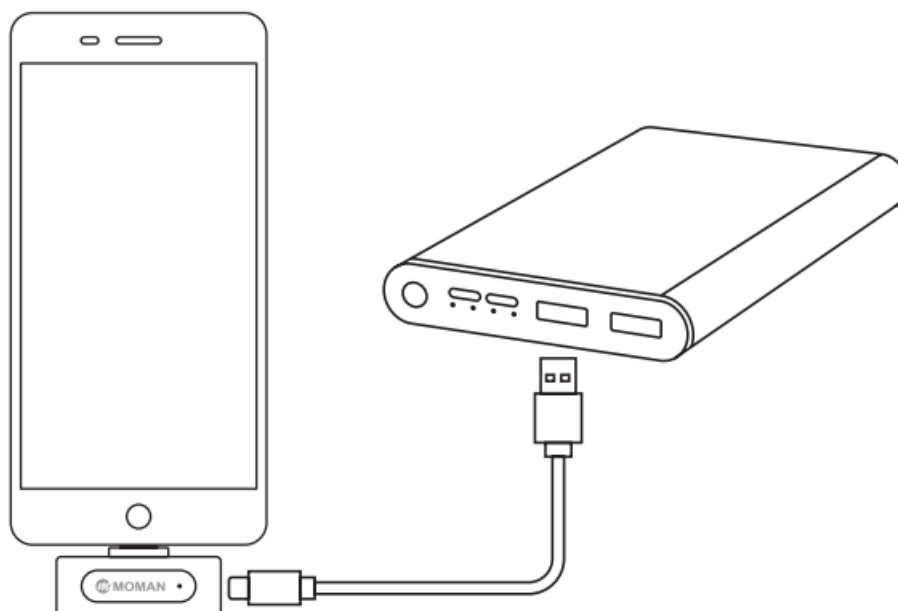

## Charging Case

### Charging

Connect the case with power supply via the charging cable.

※ When two transmitters are put in the charging case again, the green lights are ON, displaying the remaining battery.

## Specifications

## TX

Transmission Frequency	2.4GHz
Transmission Distance	≥ 10m
Latency	≤ 20ms
Sensitivity	– 38dB±3dB
Frequency Response	201-12-20KHz
Sampling Rate	48KHz
SNR	≥ 75dB
Battery	200mA
Working Time	15H
Charging Time	1.5H
Working Current	≤ 512mA
Dimensions	42.3×32.5mm

## Rx

Transmission Frequency	2.4GHz
Frequency Response	20Hz-20KHz
Dimensions	36x13mm

## Charging Case

Charging Time	3H
Battery	1000mA
Battery Life	Provide 2 full charges
Adapter	5V/1A
Input Voltage	4.8-5.5V
Max. Current	500mA
Charging Port	Type-C
Dimensions	106x65x33.5mm




**Moman (UK) Limited**



Unit 25 Basepoint Business Centre, Aviation Park, West Christchurch, United Kingdom BH23 6NX

## Documents / Resources

	<b><a href="#">MOMAN CP2 1-Trigger-2 Wireless Phone Microphone</a></b> [pdf] User Manual CP2 1-Trigger-2 Wireless Phone Microphone, CP2, 1-Trigger-2 Wireless Phone Microphone, Wi reless Phone Microphone, Phone Microphone, Microphone
---	--

[Manuals+](#).