



MONACOR CS-8 Automatic Microphone Mixers Instruction Manual

[Home](#) » [MONACOR](#) » MONACOR CS-8 Automatic Microphone Mixers Instruction Manual 

Contents

- [1 MONACOR CS-8 Automatic Microphone Mixers](#)
- [2 Automatic Microphone Mixers](#)
- [3 Model CS-8](#)
- [4 Model CS-4](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)



MONACOR CS-8 Automatic Microphone Mixers




Automatic Microphone Mixers

THE perfect aid for concepts with multiple microphones, e.g. in conference rooms, houses of worship or language laboratories. The main task of the mixer is to open the respective microphone channel when required and to close it again when the speaker has finished the presentation. This intelligent adjustment for the individual microphone channels allows for a silent and precise control that ensures that the audience hears every single word. This greatly improves the overall sound resulting in a clear, transparent reproduction and minimizes acoustic feedback and irritating background noise. The CS mixers feature a last-in function in order to maintain a pleasant atmosphere with a soft ambient sound also during the breaks in conversation rather than just cutting off the sound.

- 8 channels
- 3 operating modes: auto mode, priority or 8/1-channel mixer
- Balanced XLR inputs, switchable mic/line

- Additional stereo RCA input
- 48 V phantom power
- Mix output, switchable mic/line
- Trigger outputs for external devices, e.g. warning devices, cameras or speakers
- Status LEDs
- Several devices can be combined via link connections (supplied with cable)
- Desktop metal housing
- 482 mm (19") rack installation possible with supplied mounting brackets

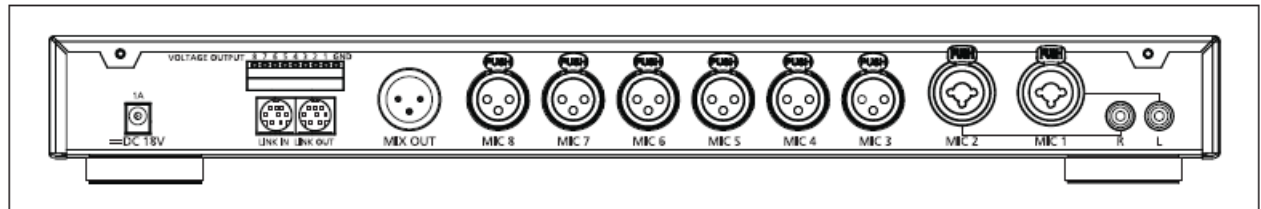


Model CS-8

Mic input	0.2 mV/4.7 k Ω
Line input	60 mV/20 k Ω
Aux output	1 V/200 Ω
Frequency range	35-20,000 Hz
THD	< 0.06%
S/N ratio	> 70 dB
Power supply	via encl. plug-in power supply
Dimensions	420 x 44 x 199 mm
Weight	2.3 kg




- 4 channels
- 3 operating modes: auto mode, priority or 4/1-channel mixer
- Balanced XLR inputs, switchable mic/line
- 12 V phantom power
- Mix output, switchable mic/line
- Trigger outputs for external devices, e.g. warning devices, cameras or speakers
- Status LEDs
- Several devices can be combined via link connections (supplied with cable)
- Desktop metal housing
- 482 mm (19") rack installation with supplied mounting brackets

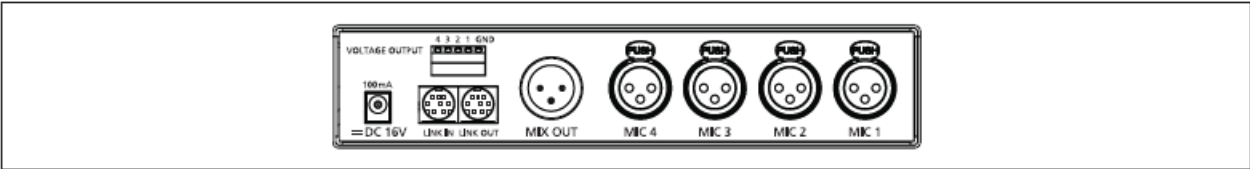

Model CS-4

Mic input	0.2 mV/4.7 kΩ
Line input	60 mV/20 kΩ
Aux output	1 V/200 Ω
Frequency range	35-20,000 Hz
THD	< 0.06%
S/N ratio	> 70 dB
Power supply	via encl. plug-in power supply
Dimensions	200 x 44 x 212 mm
Weight	1.4 kg

Documents / Resources



[MONACOR CS-8 Automatic Microphone Mixers](#) [pdf] Instruction Manual
CS-8, Automatic Microphone Mixers, CS-8 Automatic Microphone Mixers, Microphone Mixers, Mixers