

Mosentek MD005 5.8GHz Compact Size Microwave Sensor Switch



Mosentek MD005 5.8GHz Compact Size Microwave Sensor Switch Owner's Manual

[Home](#) » [Mosentek](#) » Mosentek MD005 5.8GHz Compact Size Microwave Sensor Switch Owner's Manual 

Contents

- [1 Mosentek MD005 5.8GHz Compact Size Microwave Sensor Switch](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 Product Overview](#)
- [5 Features](#)
- [6 Technical data](#)
- [7 Dimension](#)
- [8 Wiring diagram](#)
- [9 Detection coverage](#)
- [10 Settings](#)
- [11 Applications](#)
- [12 Installation precautions](#)
- [13 FCC STATEMENT](#)
- [14 Documents / Resources](#)
 - [14.1 References](#)
- [15 Related Posts](#)



Mosentek MD005 5.8GHz Compact Size Microwave Sensor Switch



Product Information

Specifications

- **Model:** MD005
- Enabling Technology Serving People
- 5.8GHz Compact Size Microwave Sensor Switch

Features

- Ultra thin configuration for light fixture build in.
- Compact size flat antenna (11*61mm W*L) for easy installation.
- Flat antenna emitting design with no sensing blind zone.
- Back side terminal block for fast wiring.
- 5 years warranty.

FAQ

- **Q:** How do I adjust the sensitivity level?
 - **A:** To adjust the sensitivity level, refer to the user manual for specific instructions on accessing and modifying the settings.
- **Q:** What is the warranty period for this product?
 - **A:** This product comes with a 5-year warranty from the date of purchase.
- **Q:** Can I use this sensor switch outdoors?
 - **A:** The operating temperature and IP rating of the sensor switch allow for outdoor usage, but it is recommended to protect it from direct exposure to harsh weather conditions.

Product Usage Instructions

Installation

1. Choose a suitable location for installation.
2. Ensure the power supply is switched off before installation.
3. Connect the wires to the back side terminal block for fast wiring.
4. Mount the sensor switch securely using screws or other appropriate fasteners.
5. Verify that the antenna is facing the desired direction for optimal sensing.

Settings

1. Adjust the sensitivity level according to your requirements.
2. Set the hold time for how long the switch should remain on after detecting motion.
3. Configure the daylight threshold to determine when the switch should activate based on ambient light conditions.
4. Choose the mounting height based on the range and angle of detection needed.

Usage

1. Ensure that the power supply is switched on.
2. The sensor switch will automatically detect motion within its detection range.
3. If motion is detected, the switch will activate and turn on the connected light fixture.
4. The hold time setting will determine how long the light fixture remains on after motion is no longer detected.
5. If the ambient light level falls below the configured daylight threshold, the switch will activate even without motion.

Product Overview



Front



Back




Side

Product Information

- **PRODUCT:** 5.8GHz Compact Size Microwave Sensor Switch
- **MODEL NO:** MD005
- **SPEC NO:**

R & D DEPARTMENT		
WRITED BY	CHECKED	APPROVED

Features

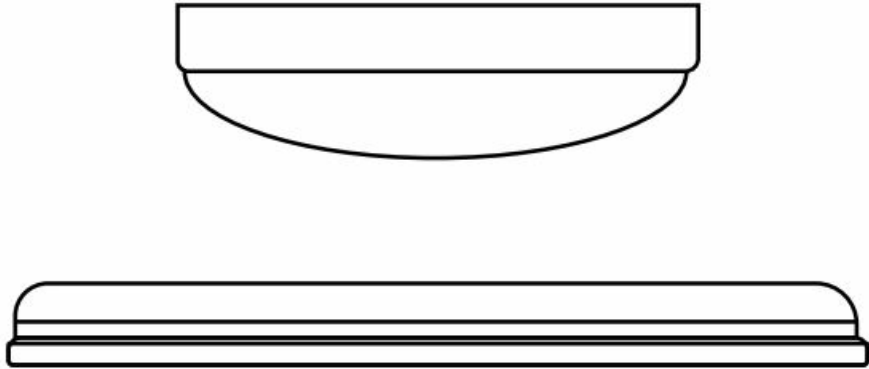


- Ultra thin configuration for light fixture build in.
- Compact size flat antenna (11*61mm W*L) for easy installation.
- Flat antenna emitting design no sensing blind zone.
- Back side terminal block for fast wiring
- 5 years warranty.


Technical data

Input Output	Operating voltage	100-277VAC 50/60Hz
	Switching capacity	Max. 400W @220VAC
	Stand-by power	<0.5W
	Output	ON/OFF
PaSraemns eotrrers	Microwave frequency	5.8GHz±75MHz
	Microwave power	<0.3mW
	Sensitivity	100%/50%
	Hold time	5s/1min/3min/10min
	Daylight threshold	Disable/50Lux/25Lux/10Lux
	Mounting height	Max.5m (Ceiling mounted); 1.5-1.8m (Wall Mounted)
	Detection range	Radius Max.4m (Ceiling mounted 3m); Max.10m (Wall Mounted 1.8m)
	Detection Angle	30°-150°
	Operating temperature	-35°C~70°C
	IP rating	IP20
	size (L*W*H	88.5*37.5*13.5mm
	Warranty	5 years
Note	Default setting: Sensitivity 100%,Hold time 5s,Daylight threshold Disable.	


Dimension

(Unit: mm)

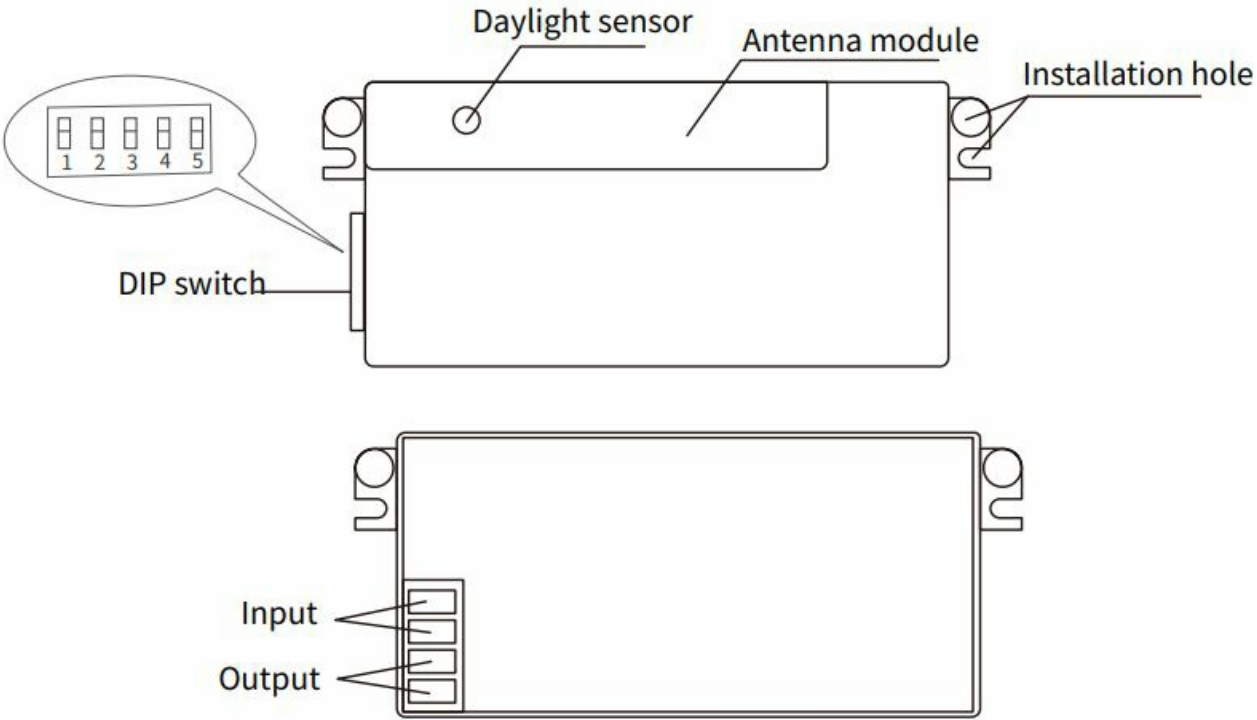

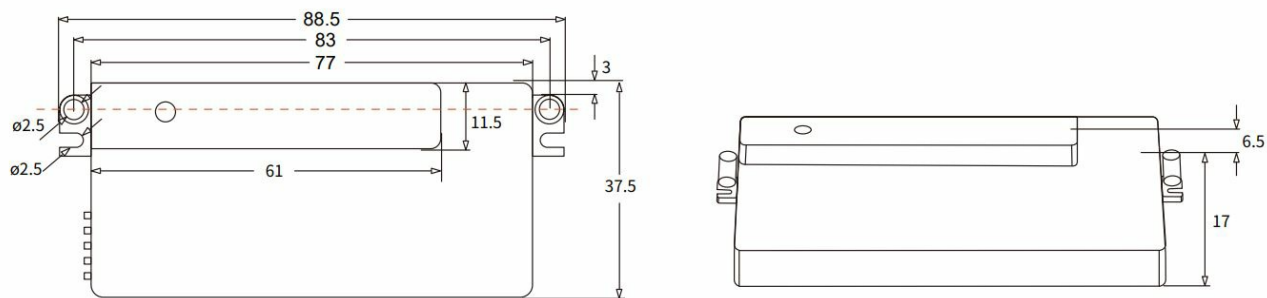


Wiring diagram

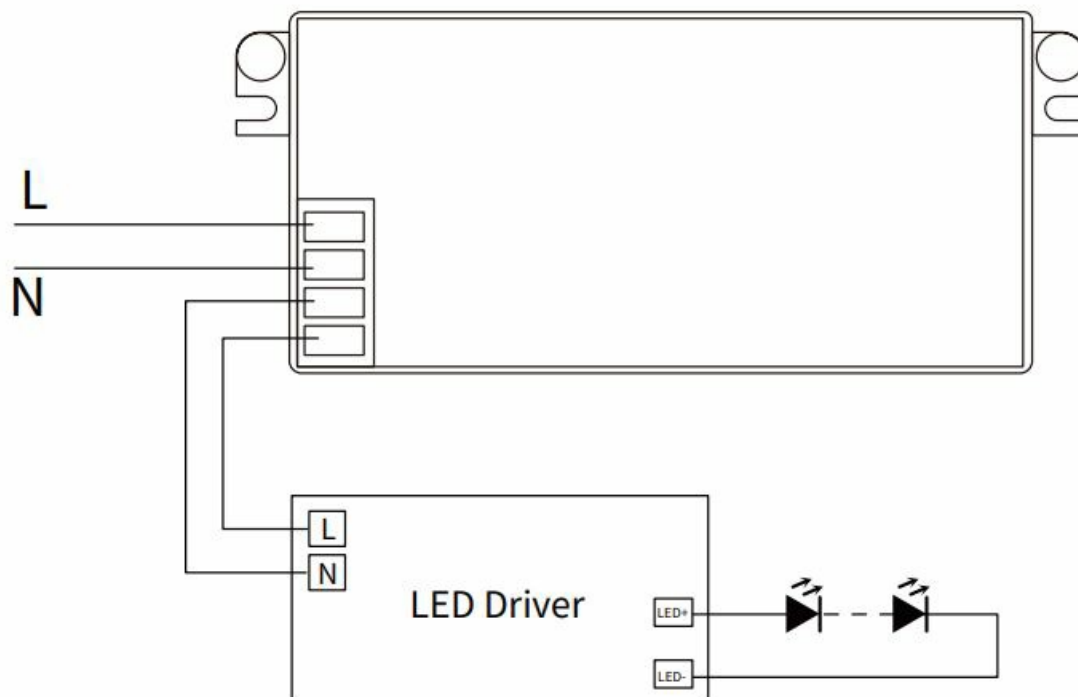


LEDAttention: The switch is designed for connecting a single loading, it will affect the lifetime if connecting more than one loading.

Detection coverage


Sensitivity: 100% 100%

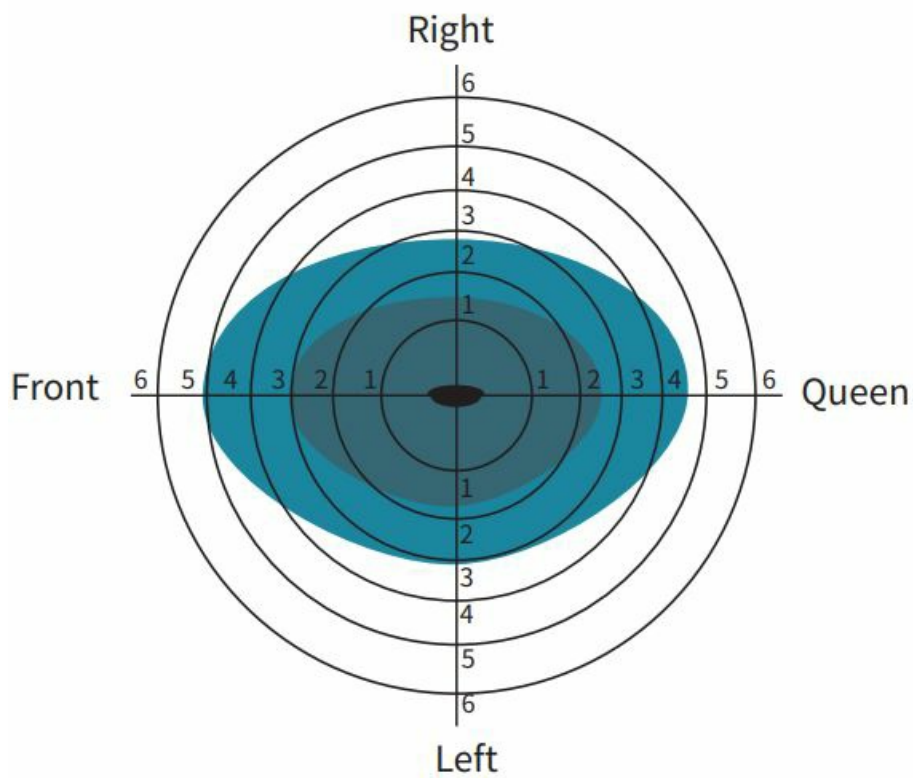

Sensor mounting direction

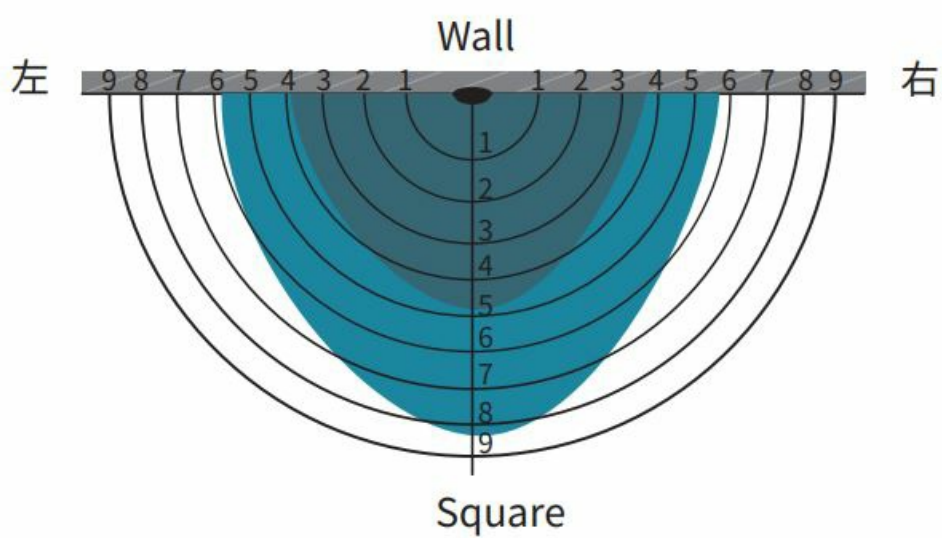


Settings

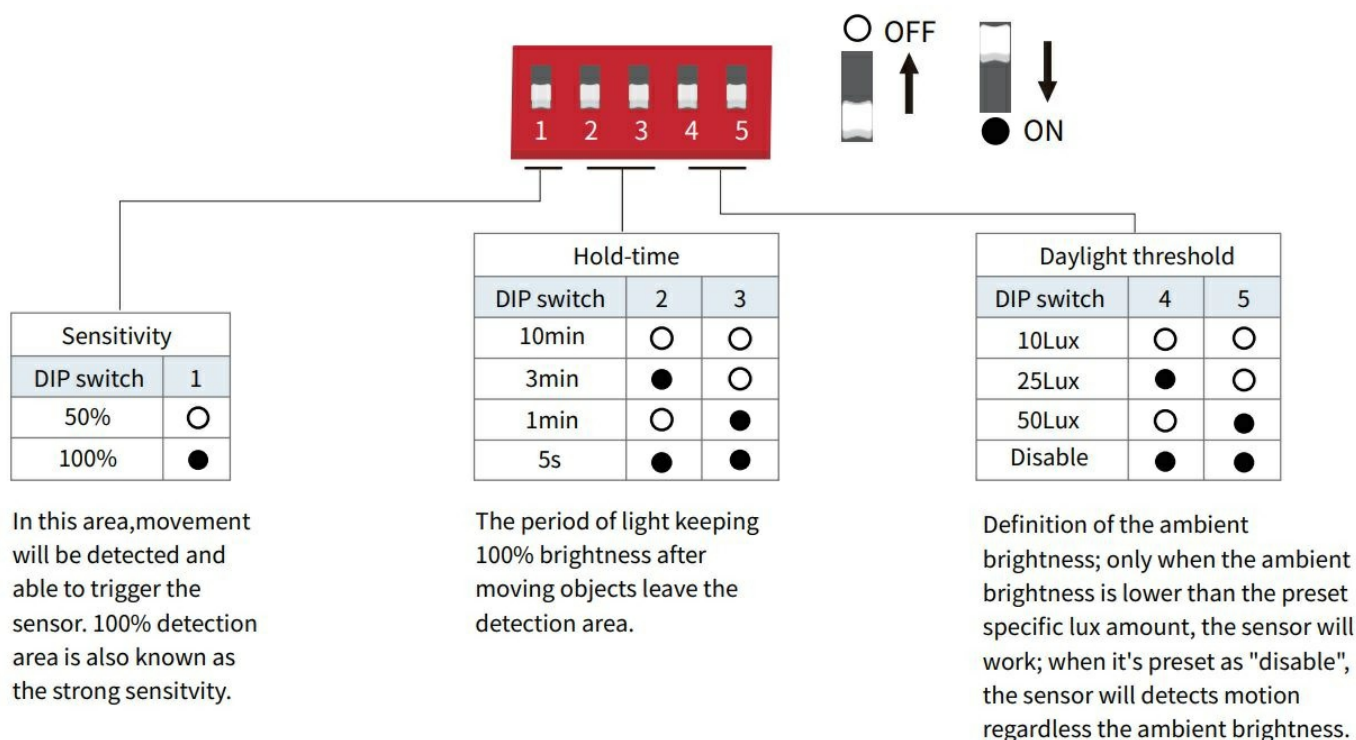


Applications

Automatically ON/OFF function


1. The daylight threshold is set to "10Lux/25Lux/50Lux"




With sufficient daylight, even when motion detected, light remains OFF.



With insufficient daylight, when motion detected, light ON.




After people leave the detection area, light remains 100% brightness within hold time.




After the last detection and the preset hold time elapsed, light OFF.


2. The daylight threshold is set to "Disable". Light on when detect movement, After people leave, Light off after Hold-time.



When motion is detected, the sensor will switch on the light to 100% brightness.



After people leave the detection area, light remains 100% brightness within hold time.



After the last detection and the present hold time elapsed, light OFF.

Applications



Corridor



Staircase



Parking

Installation precautions

- Wiring must be strictly in accordance with the wiring diagram to avoid short circuit.
- The detected surface cannot be shielded by metal objects.
- Microwave sensor can be installed in any lamp except the one with full metal shell.
- Should be kept away from the driver to avoid interference generation and lamp flashing.
- Shall not be installed next to large operating machines such as ventilator/ceiling fan to avoid false triggering caused by machine vibration.
- Suitable for indoor installation to avoid false triggering due to external factors such as rain, wind or tree swing.

FCC STATEMENT

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference
2. This device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Note: The Grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. such modifications could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement.


To maintain compliance with FCC's RF exposure guidelines, the distance must be at least 20 cm between the radiator and your body, and fully supported by the operating and installation

Add: Block H 5F; Huamingchen Hi-Tech Industry Park; Genyu Road; Matian Street; Guangming District; Shenzhen PRC.

Email: sales@mosentek.com

Tel: +86 0755 2720 6813

Documents / Resources



Mosentek MD005 5.8GHz Compact Size Microwave Sensor Switch [pdf] Owner's Manual
2AZUC-MD005, 2AZUCMD005, MD005, MD005 5.8GHz Compact Size Microwave Sensor Switch, 5.8GHz Compact Size Microwave Sensor Switch, Compact Size Microwave Sensor Switch, Size Microwave Sensor Switch, Microwave Sensor Switch, Sensor Switch, Switch

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.