

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [GEEKVAPE](#) /

› [GEEKVAPE Aegis Solo 2 / S100 Kit User Manual](#)

## GEEKVAPE S100

# GEEKVAPE Aegis Solo 2 / S100 Kit User Manual

Model: S100  
Brand: GEEKVAPE

## 1. PRODUCT OVERVIEW

The GEEKVAPE Aegis Solo 2 (S100) Kit is designed for durability and performance, featuring 2nd generation Tri-Proof technology for enhanced protection against water, dust, and shock. Its compact design offers a comfortable grip while maintaining a robust metallic aesthetic.

### Key Features:

- IP68 Rating for water and dust resistance
- 1.08" Full Screen Display for clear information
- Compatible with Z Sub-Ohm 2021 Tank
- 100W maximum output
- Powered by a single 18650 battery (NOT INCLUDED)



## 2. SETUP GUIDE

### 2.1 Battery Installation

The Aegis Solo 2 / S100 Kit requires a single **18650 battery** for operation. Please note that the battery is **NOT included** in the package and must be purchased separately.

1. Unscrew the battery cap located at the bottom of the device by turning it counter-clockwise.
2. Insert a fully charged 18650 battery into the battery compartment, ensuring the positive (+) and negative (-) terminals align correctly as indicated inside the compartment.
3. Screw the battery cap back on clockwise until it is securely tightened.

### 2.2 Tank Assembly and Coil Installation

The kit includes the Z Sub-Ohm 2021 Tank. Follow these steps to assemble and prepare the tank:

1. Unscrew the base of the tank from the main body.
2. Insert a compatible Z Series coil into the tank from the bottom, ensuring it is firmly seated.
3. Screw the base back onto the tank body.
4. Screw the assembled tank onto the 510 connector of the Aegis Solo 2 mod until snug.

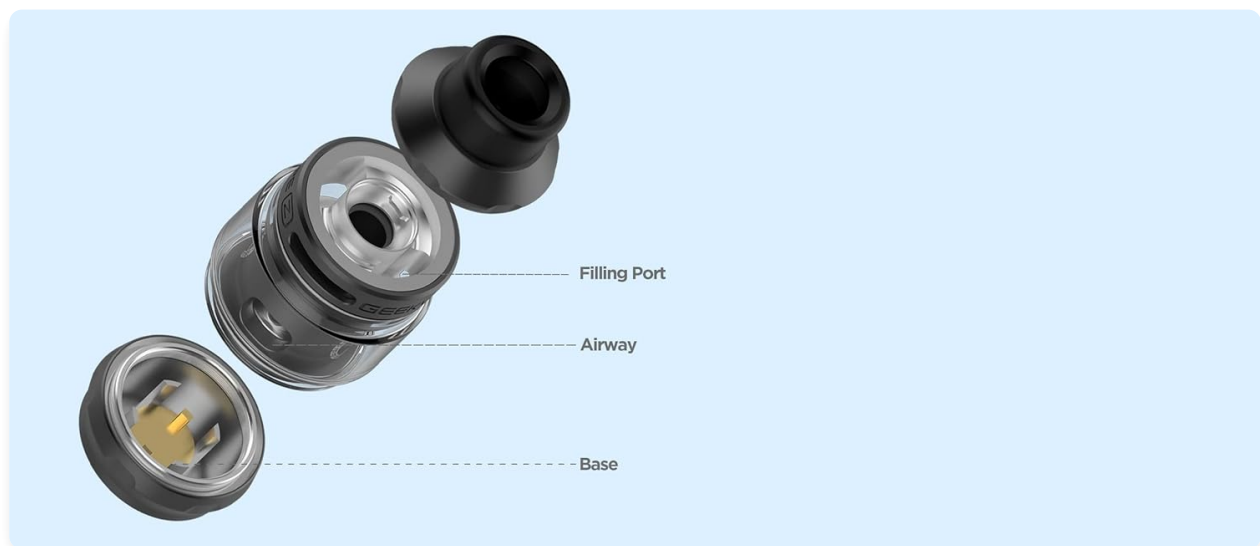


Image 2.1: Exploded diagram of the Z Sub-Ohm Tank components.

### 2.3 E-liquid Filling

To fill the Z Sub-Ohm 2021 Tank:

1. Locate the top cap of the tank.
2. Push the top cap to slide it open, revealing the filling port.
3. Insert the nozzle of your e-liquid bottle into the filling port and gently squeeze to fill the tank. Avoid filling into the central airflow tube.
4. Once filled, slide the top cap back into place until it clicks shut.
5. After filling a new coil, allow the e-liquid to soak into the coil for at least 5-10 minutes before first use to prevent dry hits.

## 3. OPERATING INSTRUCTIONS

---

### 3.1 Power On/Off

To turn the device on or off, rapidly press the fire button **5 times** within 2 seconds.

### 3.2 Adjusting Wattage

Use the '+' and '-' adjustment buttons located below the screen to increase or decrease the wattage output. The wattage range is typically 5W to 100W.

### 3.3 Screen Display Information

The 1.08" full screen display provides essential information about your device's status:

- **Battery Level:** Indicated by an icon and percentage.
- **Wattage:** Current power output.
- **Coil Resistance ( $\Omega$ ):** Resistance of the installed coil.
- **Voltage (V):** Output voltage.
- **Puff Counter:** Tracks the number of puffs taken.



Image 3.1: Close-up view of the Aegis Solo 2 S100's 1.08" display screen.

### 3.4 Locking/Unlocking the Device

The Aegis Solo 2 features a convenient A-Lock switch on the side of the device. Slide the switch up to lock the device and prevent accidental firing or wattage adjustments. Slide it down to unlock.

## 4. MAINTENANCE

---

### 4.1 Cleaning

- Regularly clean the 510 connector on the mod and the base of the tank with a dry cloth or cotton swab to ensure good conductivity.
- For the tank, disassemble it and rinse the glass and metal parts (excluding the coil) with warm water. Allow all parts to dry completely before reassembly.

## 4.2 Coil Replacement

Coils are consumable parts and need to be replaced regularly, typically every 1-2 weeks depending on usage and e-liquid. Replace the coil when you notice a burnt taste, reduced vapor production, or diminished flavor.

1. Ensure the tank is empty of e-liquid.
2. Unscrew the tank from the mod.
3. Unscrew the base of the tank.
4. Pull out the old coil from the tank.
5. Insert a new Z Series coil firmly into place.
6. Reassemble the tank and fill with e-liquid, allowing time for the new coil to prime.

## 4.3 General Care

- Keep the device away from extreme temperatures (hot or cold) and direct sunlight.
- Store the device in a dry place when not in use.
- Avoid dropping the device, despite its shock resistance, to prevent internal damage.

# 5. TROUBLESHOOTING

---

## 5.1 Device Not Turning On

- Ensure the 18650 battery is correctly inserted with the correct polarity.
- Check if the battery is charged. If not, charge it using an external battery charger.
- Press the fire button 5 times rapidly to power on the device.

## 5.2 No Vapor or Weak Vapor

- Check the e-liquid level in the tank.
- Ensure the coil is properly installed and not burnt out. Replace if necessary.
- Adjust the wattage to a suitable level for your coil's resistance.
- Ensure the device is not locked (check A-Lock switch).

## 5.3 Leaking Tank

- Ensure all tank components are securely tightened, especially the coil and base.
- Check the O-rings for damage or displacement. Replace if needed.
- Avoid overfilling the tank.
- Ensure the top cap is fully closed after filling.

## 5.4 Screen Not Displaying

- Ensure the device is powered on.

- Check battery charge.
- If the issue persists, try removing and reinserting the battery.







## 6. SPECIFICATIONS

Feature	Specification
Product Dimensions	7 x 4 x 4 cm
Weight	380 g
Wattage Output	Up to 100 watts
Tank Volume	2 Millilitres
Battery Type	Single 18650 (NOT INCLUDED)
Display Screen	1.08" Full Screen Display
Protection Rating	IP68 Water & Dust Resistance, Shock Resistance
Manufacturer	Geek Vape

## 7. WARRANTY AND SUPPORT

For warranty information and technical support, please refer to the official GEEKVAPE website or contact the retailer from whom you purchased the product. Keep your proof of purchase for any warranty claims.

This product is intended for adult users only. Please adhere to all local laws and regulations regarding vaping products.

	<p><a href="#">S100 Smart Health Watch User Manual</a></p> <p>User manual for the S100 Smart Health Watch, covering appearance, charging, app pairing, main interface selection, operation methods, product parameters, main functions, app languages, and precautions. Features include TFT display, rotate key, Bluetooth calling, heart rate monitoring, and multiple sport modes.</p>
	<p><a href="#">Geekvape Aegis S100 Kit User Manual and Instructions</a></p> <p>Comprehensive user manual for the Geekvape Aegis S100 Kit, detailing parts, assembly, operation, and customer service information. Includes instructions for use and authenticity verification.</p>
	<p><a href="#">GeekVape Aegis Solo 3: Návod k použití a specifikace</a></p> <p>Podrobný návod k použití pro elektronickou cigaretu GeekVape Aegis Solo 3, včetně informací o funkcích, specifikacích, nabíjení a bezpečnostních pokynech.</p>
	<p><a href="#">Commander S100 User Guide: Variable Speed A.C. Drive for Induction Motors</a></p> <p>Comprehensive user guide for the Nidec Control Techniques Commander S100 Variable Speed A.C. drive. Covers installation, setup, operation, safety, and technical specifications for induction motors.</p>
	<p><a href="#">Geekvape Aegis Solo III Kit Technical Specifications and Precautions</a></p> <p>This document outlines the technical specifications and important precautions for the Geekvape Aegis Solo III Kit, including material, color, processing, dimensions, and handling instructions for automated production.</p>
	<p><a href="#">GEEKVAPE Soul 2 User Manual - Comprehensive Guide</a></p> <p>Explore the GEEKVAPE Soul 2 user manual for detailed instructions on setup, operation, maintenance, and troubleshooting. Learn about product specifications, e-liquid filling, pod replacement, and safety features.</p>

[illegible]

Gunsberg Cartridge Specification						
Cartridge	Caliber	Weight	Grain	Velocity	Energy	Accuracy
0.308 Win	7.62mm	150gr	150gr	2800	2800	1.5"
0.308 Win	7.62mm	165gr	165gr	2700	2700	1.5"
0.308 Win	7.62mm	180gr	180gr	2600	2600	1.5"
0.308 Win	7.62mm	200gr	200gr	2500	2500	1.5"
0.308 Win	7.62mm	220gr	220gr	2400	2400	1.5"
0.308 Win	7.62mm	240gr	240gr	2300	2300	1.5"
0.308 Win	7.62mm	260gr	260gr	2200	2200	1.5"
0.308 Win	7.62mm	280gr	280gr	2100	2100	1.5"
0.308 Win	7.62mm	300gr	300gr	2000	2000	1.5"
0.308 Win	7.62mm	320gr	320gr	1900	1900	1.5"
0.308 Win	7.62mm	340gr	340gr	1800	1800	1.5"
0.308 Win	7.62mm	360gr	360gr	1700	1700	1.5"
0.308 Win	7.62mm	380gr	380gr	1600	1600	1.5"
0.308 Win	7.62mm	400gr	400gr	1500	1500	1.5"
0.308 Win	7.62mm	420gr	420gr	1400	1400	1.5"
0.308 Win	7.62mm	440gr	440gr	1300	1300	1.5"
0.308 Win	7.62mm	460gr	460gr	1200	1200	1.5"
0.308 Win	7.62mm	480gr	480gr	1100	1100	1.5"
0.308 Win	7.62mm	500gr	500gr	1000	1000	1.5"
0.308 Win	7.62mm	520gr	520gr	900	900	1.5"
0.308 Win	7.62mm	540gr	540gr	800	800	1.5"
0.308 Win	7.62mm	560gr	560gr	700	700	1.5"
0.308 Win	7.62mm	580gr	580gr	600	600	1.5"
0.308 Win	7.62mm	600gr	600gr	500	500	1.5"
0.308 Win	7.62mm	620gr	620gr	400	400	1.5"
0.308 Win	7.62mm	640gr	640gr	300	300	1.5"
0.308 Win	7.62mm	660gr	660gr	200	200	1.5"
0.308 Win	7.62mm	680gr	680gr	100	100	1.5"
0.308 Win	7.62mm	700gr	700gr	0	0	1.5"
0.308 Win	7.62mm	720gr	720gr	0	0	1.5"
0.308 Win	7.62mm	740gr	740gr	0	0	1.5"
0.308 Win	7.62mm	760gr	760gr	0	0	1.5"
0.308 Win	7.62mm	780gr	780gr	0	0	1.5"
0.308 Win	7.62mm	800gr	800gr	0	0	1.5"
0.308 Win	7.62mm	820gr	820gr	0	0	1.5"
0.308 Win	7.62mm	840gr	840gr	0	0	1.5"
0.308 Win	7.62mm	860gr	860gr	0	0	1.5"
0.308 Win	7.62mm	880gr	880gr	0	0	1.5"
0.308 Win	7.62mm	900gr	900gr	0	0	1.5"
0.308 Win	7.62mm	920gr	920gr	0	0	1.5"
0.308 Win	7.62mm	940gr	940gr	0	0	1.5"
0.308 Win	7.62mm	960gr	960gr	0	0	1.5"
0.308 Win	7.62mm	980gr	980gr	0	0	1.5"
0.308 Win	7.62mm	1000gr	1000gr	0	0	1.5"
0.308 Win	7.62mm	1020gr	1020gr	0	0	1.5"
0.308 Win	7.62mm	1040gr	1040gr	0	0	1.5"
0.308 Win	7.62mm	1060gr	1060gr	0	0	1.5"
0.308 Win	7.62mm	1080gr	1080gr	0	0	1.5"
0.308 Win	7.62mm	1100gr	1100gr	0	0	1.5"
0.308 Win	7.62mm	1120gr	1120gr	0	0	1.5"
0.308 Win	7.62mm	1140gr	1140gr	0	0	1.5"
0.308 Win	7.62mm	1160gr	1160gr	0	0	1.5"
0.308 Win	7.62mm	1180gr				

## M45 Kit Legend 2 ( L200 \* )

Vapeur Direct (fermée, Direction Poussoir)

Geokéop revient sur son produit ultra populaire - Angis 1.50 - dès lors avec toute nouvelle version: Angis 2.00 - 5100, complétant l'offre et s'embarquant au gros lot de nouveautés.

Proposée par sa carte 18650 (Nouveau), elle débute toujours jusqu'à 1000% de performance et elle se dote d'un gram d'eau couvrant 1.800 litres tous les détails et le mode ultime.

Elle embarque un petit 100-6 au dessus de l'écran recouvert par un capuchon logé Geokéop.

Disposant 100%, la Angis 2.00 est triple protection: contre la poussière, l'eau et les chocs.La son embarque le Bouton à Lock qui verrouille complètement son utilisation. La version en kit est livrée avec le 2.50.

Sehobon 2021 de 5.5mm allonge les résistances 2.5series.

Prix **TTC 74,90€**

Niveau d'expertise

livré en kit:

- 1 bon Angis Legend 2
- 1 cleanroom 2Zus Sehobon 2021
- 1 pousse de recharge
- résistance 2 de 2,0 ohm
- résistance 2 de 2,5 ohm
- 1 set de pièces de rechange
- câble USB C
- 1 manuel d'utilisation

### Produits associés

**R45 - Résistances 2**

Prix TTC minimum: 3,90€

**ACCOO Press**

Prix TTC minimum: 4,00 €

**A39 Cleanroom 2Zus**

Prix TTC minimum: 32,90 €

[\[pdf\]](#) User Manual

GEEKVAPE AEGIS SOLO S100 BOX MOD Εγχειρίδιο Χρήσης 1 x Geekvape Box Mod Καλώδιο Type C

χρήσης Ευχαριστούμε που επιλέξατε την Για καλύτερη εμπειρία χρήσης **Aegis Solo 2 manual GR WEB**  
replacesmoke images **MANUALS GREEK |||**

GEEKVAPE AEGIS SOLO **\$100** BOX MOD : 1 x Geekvape AEGIS SOLO **\$100** Box  
Mod 1 x Type-C 1 x GEEKVAPE -, . - . : 8.5V - : 0,1 ohm-3 ohm - : 5V / 2.0 - : 3.3V  
0.1V - PCBA: 85 C - : 10s - : -10 C - 45 C - : 10uA - : -20 C - 60 C - : 10 RH-70 RH ...  
lang:nl **score:38** filesize: 107.06 K page\_count: 2 document date: 2022-09-27

[\[pdf\]](#) Specifications

GeekVape Hardware Compatibility LA Vapor IncGeekvape Coils Cartridges specificationcdn shopify s

files 1 1726 8617 Geekvape specification v 1716416025 |||

Vaping Styles DTL MTL RDTL DTL DTL DTL Pictures Geekvape Coil/Cartridge  
Specification Coil/Cartri ... elisk Tank / Obelisk 120FC / Obelisk 200 / P Subohm Tank  
Except Z0.25 / Geekvape L200 Kit/ Geekvape **\$100** / MAX 2 45-57W Geekvape L200  
Kit / Geekvape **\$100** / MAX 2 Z0.4 Coil B0.2 Coil 0.4 0.2 50-60...

lang:af score:27 filesize: 1.1 M page\_count: 4 document date: 2024-05-22

[\[pdf\]](#)

aegis SOLO s100 master M45 Kit Legend 2 L200 ° Prix TTC 74 90€ Niveau d expertise Vape Direct

Fumée DIRECT Poumon R45 Résistances Z conseillé 3 A39 4dY9wktGmc cotevap fr files |||

M45 Kit Legend 2 L200 Vape Direct Fume DIRECT Poumon Prix TTC 74,90 Niveau d'expertise GeekVape revient sur son produit ultra populaire - Aegis Solo dans une toute nouvelle version Aegis Solo 2 ou **\$100**, complètement revisité et embarquant un gros lot de nouveautés. Propulse par un accu 18650 ...


lang:fr score:20 filesize: 202.28 K page\_count: 2 document date: 2021-10-11

[\[pdf\]](#) User Manual

9113 geekvape aegis solo 2 manual \* Bitte bewahren Sie das Benutzerhandbuch zum späteren Nachschlagen auf O GEEKVAPE D S100 KIT ismokesmart de media c2 2e 83 |||

...

lang:fr **score:19** filesize: 1.08 M page\_count: 1 document date: 2024-12-10

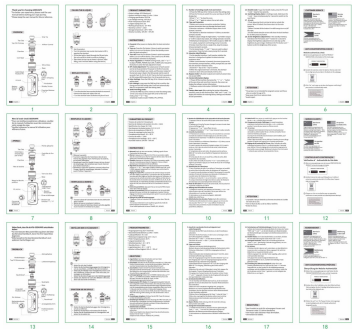

[Geekvape Aegis S100 Kit User Manual and Instructions](#)

Comprehensive user manual for the Geekvape Aegis S100 Kit, detailing parts, assembly, operation, and customer service information. Includes instructions for use and authenticity verification.

lang:fr **score:15** filesize: 942.91 K page\_count: 1 document date: 2021-08-24



**VERSIONS** Standard Edition / TPD Edition

Here comes Geekvape S100 (Solo 2) with new tri-proof: Industry-leading IP68 rating water & dust resistance, Ground-breaking shock resistance, External 10000mAh battery for long time usage and convenience. A-Lock, accidental press protection, Bigger screen with new UI, and Geekvape 2.0 exclusive 225-Tank. Time for Solo 2 to play the solo.

**FEATURES**



**COLORS**



**SPECIFICATIONS / PRODUCT DIMENSIONS**

Output Voltage	5.0V (Maximum)
Output Power	20W (Max)
Working Temperature	0°C-40°C
Low Voltage Warning	2.5V-3.0V
LED Working Temperature	0°C-40°C
LED Working Voltage	2.0V-3.0V
Working Temperature	0°C-40°C
Working Voltage	2.0V-3.0V
Relative Humidity	20% - 90%



**PACKAGING SPECIFICATIONS**

<b>PRODUCT PACKAGE (TPD)</b>	<b>PACKAGING BOX (TPD)</b>	<b>PRODUCT PACKAGE (TPD)</b>	<b>PACKAGING BOX (TPD)</b>
Length: 87mm	Length: 87mm	Length: 87mm	Length: 87mm
Width: 30mm	Width: 30mm	Width: 30mm	Width: 30mm
Height: 125mm	Height: 125mm	Height: 125mm	Height: 125mm

<b>PRODUCT PACKAGE (TPD)</b>	<b>PACKAGING BOX (TPD)</b>
Length: 87mm	Length: 87mm
Width: 30mm	Width: 30mm
Height: 125mm	Height: 125mm

**CONTENTS**

<b>STANDARD EDITION</b>	<b>TPD EDITION</b>
1 x Main	1 x Main
1 x Battery (225-Tank)	1 x Battery (225-Tank)
1 x Battery (225-Tank)	1 x Battery (225-Tank)
1 x Battery (225-Tank)	1 x Battery (225-Tank)
1 x Battery (225-Tank)	1 x Battery (225-Tank)

<b>TPD EDITION</b>
1 x Main
1 x Battery (225-Tank)
1 x Battery (225-Tank)
1 x Battery (225-Tank)
1 x Battery (225-Tank)

<b>TPD EDITION</b>
1 x Main
1 x Battery (225-Tank)
1 x Battery (225-Tank)
1 x Battery (225-Tank)
1 x Battery (225-Tank)

[\[pdf\]](#)

solo2 Spec TechSpec Downloads Geekvape Pursue a Healthy Vaping Experience Official Partner of Paris Saint German S100 spec geekvape upload |||

...

lang:fr **score:13** filesize: 6.72 M page\_count: 1 document date: 2021-08-06



