



MW MEAN WELL 200W PWM Output Driver User Manual

[Home](#) » [MW MEAN WELL](#) » MW MEAN WELL 200W PWM Output Driver User Manual 

MW MEAN WELL 200W PWM Output Driver User Manual



Contents

- 1 Features
- 2 Applications
- 3 Description
- 4 Model Encoding
- 5 SPECIFICATIONS
- 6 DIMMING OPERATION
 - 6.1 OUTPUT LOAD TEMPERATURE
 - 6.2 STATIC CHARACTERISTIC
 - 6.3 POWER FACTOR PF CHARACTERISTIC
 - 6.4 TOTAL HARMONIC DISTORTION (THD)
 - 6.5 EFFICIENCY LOAD
 - 6.6 LIFE TIME
- 7 Block Diagram
- 8 Mechanical Specification
- 9 Recommend Mounting Direction
- 10 Installation Manual
 - 10.1 Connection for KN-type
 - 10.2 Cautions
- 11 Documents / Resources
 - 11.1 References
- 12 Related Posts

Features

- Constant Voltage PWM style output with user changeable frequency up to 4KHz compliant IEEE1789-2015 and EU Ecodesign SVM requirement
- Min.dimming level 0.01%
- Plastic housing with class II design
- Standby power consumption<0.5W
- Support KNX Data Secure
- No need KNX-DALI gateway
- Typical lifetime>50000 hours
- 5 years warranty

Applications

- LED strip lighting
- Indoor LED lighting
- LED decorative lighting
- LED architecture lighting
- Type “HL” for use in class I, division 2 hazardous (classified)
- Cove lighting

Description


PWM-200KN series is a 200W AC/DC LED driver featuring the constant voltage mode with PWM style output, which is able to maintain the colour temperature and the brightness homogeneity when driving all kinds of LED

strips and constant voltage LED bulbs. The built-in **KNX** interface is to avoid using the complicated **KNX-DALI** gateway and equipped with **KNX** Data Secure. **KNX** Data Secure offers protection against manipulation in building automation and can be configured in the ETS project.

PWM-200KN operates from **100~305VAC** and offers models with output voltage between 12V & 48V. Thanks to the high efficiency up to 94%, with the fanless design, the entire series is able to operate for -40°C ~ +85°C case temperature under free air convection.

The minimal dimming level low to 0.01% is suitable for low light level applications e.g. cinema. The output frequency is changeable up to 4KHz complaint **IEEE1789-2015** no risk requirement and EU **Ecodesign** stroboscopic **visibility measure(SVM)** concern due to light flickering. requirement providing a great solution for health concern due to light flickering.

Model Encoding

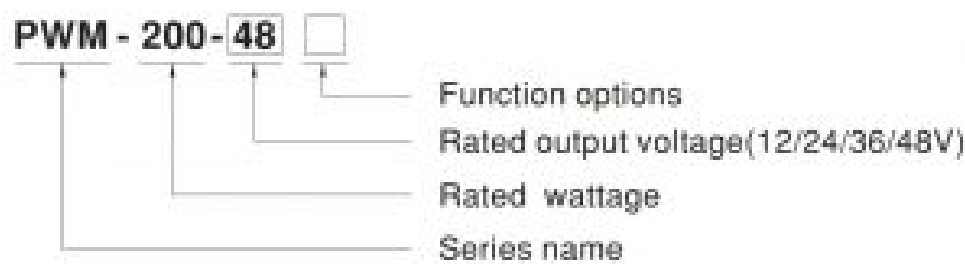

Type	Function	Note
KN	KNX control technology	In stock

SPECIFICATIONS

MODEL		PWM-200-12	PWM-200-24	PWM-200-36	PWM-200-48
	DC VOLTAGE	12V	24V	36V	48V
	RATED CURRENT	15A	8.3A	5.55A	4.17A
	RATED POWER	180W	199.2W	199.8W	200.1W

OUTP UT	DIMMING RANG E	0 ~ 100%			
	PWM FREQUENCY (Ty p.)	200~4000Hz user changable via ETS			
	SETUP, RISE TIM E Note.2	500ms, 80ms/230VAC, 1200ms, 80ms/115VAC			
	HOLD UP TIME (Typ.)	10ms/230VAC or 115VAC			
INPU T	VOLTAGE RANG E Note.3	100 ~ 305VAC 142 ~ 431VDC (Please refer to “STATIC CHARACTERISTIC” section)			
	FREQUENCY RA NGE	47 ~ 63Hz			
	POWER FACTOR (Typ.)	PF>0.97/115VAC, PF>0.96/230VAC, PF>0.94/277VAC @ full load (Please refer to “POWER FACTOR (PF) CHARACTERISTIC” section)			
	TOTAL HARMO NIC DISTORTION	THD<20%(@load≥60%/115VAC, 230VAC; @load≥75%/277VAC) (Please refer to “TOTAL HARMONIC DISTORTION” section)			
	EFFICIENCY (Ty p.)	92%	93%	94%	94%

	AC CURRENT (Typ.)	2.2A / 115VAC 1.1A / 230VAC 0.9A / 277VAC			
	INRUSH CURRENT (Typ.)	COLD START 65A(twidth=550µs measured at 50% Ipeak) at 230VAC; Per NEMA 410			
	MAX. NO. of PSUs on 16A CIRCUIT BREAKER	3 units (circuit breaker of type B) / 5 units (circuit breaker of type C) at 230VAC			
	LEAKAGE CURRENT	<0.75mA / 277VAC			
	STANDBY POWER CONSUMPTION	standby power consumption<0.5W when dimming off			
PROTECTION	OVERLOAD	108 ~ 135% rated output power			
		Hiccup mode or Constant current limiting, recovers automatically after fault condition is removed			
	SHORT CIRCUIT	Shut down o/p voltage, re-power on to recover			
	OVER VOLTAGE	13 ~ 18V	27 ~ 34V	41 ~ 49V	53 ~ 65V
		Shut down o/p voltage, re-power on to recover after fault condition is removed			

	OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover after fault condition is removed
ENVIRONMENT	WORKING TEMP.	Tcase=-40 ~ +85°C (Please refer to “ OUTPUT LOAD vs TEMPERATURE” section)
	MAX. CASE TEMP.	Tcase=+85°C
	WORKING HUMIDITY	20 ~ 95% RH non-condensing
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes
	SAFETY STANDARDS Note.5	UL8750(type "HL"), CSA C22.2 No. 250.13-12; ENEC BS EN/EN61347-1, BS EN/EN61347-2-13,BS EN/EN62384 independent, EAC TP TC 004,GB19510.1,GB19510.14 approved; Design refer to BS EN/EN60335-1, According to BS EN/EN61347-2-13 appendix J suitable for emergency installations.
	KNX STANDARDS	Certified protocol

SAFE TY & EMC	WITHSTAND VOLTAGE	I/P-O/P: 3.75KVAC
	ISOLATION RESISTANCE	I/P-O/P: 100M Ohms / 500VDC / 25°C/ 70% RH
	EMC EMISSION Note.6	Compliance to BS EN/EN55015, BS EN/EN61000-3-2 Class C (@load \geq 60%) ; BS EN/EN61000-3-3,GB17743 and GB17625.1,EAC TP TC 020
	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11; BS EN/EN61547, light industry level (surge immunity, Line-Line 2KV),EAC TP TC 020
OTHERS	MTBF	553.6 K hrs min. Telcordia SR-332 (Bellcore) ; 170 K hrs min. MIL-HDBK-2 17F (25°C)
	DIMENSION	195*68*39.5mm (L*W*H)
	PACKING	1.03Kg; 12pcs/13.4Kg/0.71CUFT

NOTE


1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature.
2. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.
3. De-rating may be needed under low input voltages. Please refer to “STATIC CHARACTERISTIC” sections for details.
4. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.
5. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly tc point (or TMP, per DLC), is about 75°C or less.
6. Please refer to the warranty statement on MEAN WELL's website at <http://www.meanwell.com>
7. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitudes higher than 2000m(6500ft).
8. For any application note and IP waterproof function installation caution, please refer our user manual before using. [LED_EN](#) [PDF]
9. It is not recommended to connect to capacitive loads
 - **Product Liability Disclaimer:** For detailed information, please refer to <https://www.meanwell.com/serviceDisclaimer.aspx>

DIMMING OPERATION



Dimming principle for PWM style output

- Dimming is achieved by varying the duty cycle of the output current.

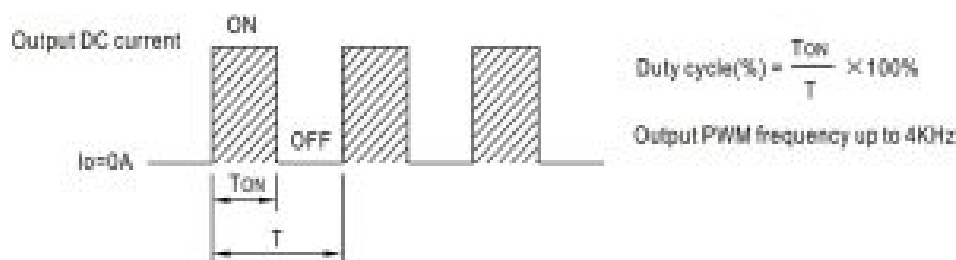

KNXInterface

- Apply KNX signal between KNX+ and KNX-.

The application program(database) can be downloaded via Online Catalogs from ETS or via <http://www.meanwell.com/productCatalog.aspx>

Parametrization options	Description
Switch functions	<ul style="list-style-type: none">• Turn on brightness• Dimming speed for turn on/off• Switch telegram and status• Switch on/off delay
Dimming	<ul style="list-style-type: none">• Dimming speed for 0~100%• Allow switch on via relative dimming
Brightness value	<ul style="list-style-type: none">• Dimming speed for transition brightness values• Permit set switch on and off brightness via value• Brightness value and status

More parameters can be found in the ETS application database and instruction manual



The device is equipped with KNX Data Secure. KNX Data Secure offers protection against manipulation in building automation and can be configured in the ETS project. Detailed specialist knowledge is required. A device certificate, which is attached to the device, is required for the first configuration. After configuration and ready for runtime (daily) operation, it is recommended to remove the certificate from the device and to store it securely. For details, please refer to the instruction manual.

MEAN WELL


Device Certificate




OUTPUT LOAD TEMPERATURE

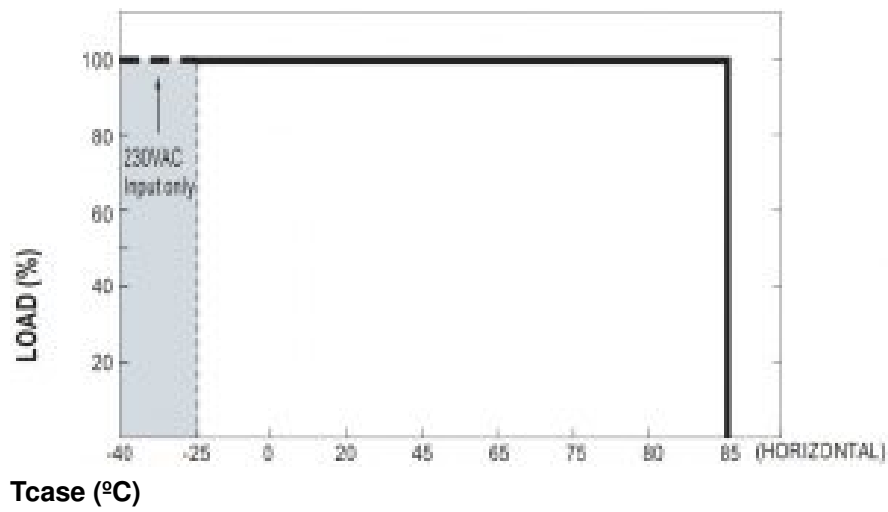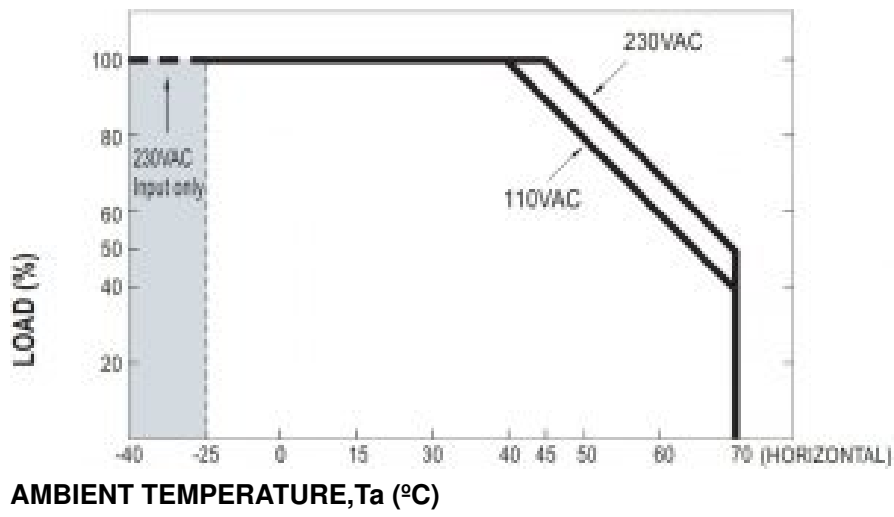

STATIC CHARACTERISTIC

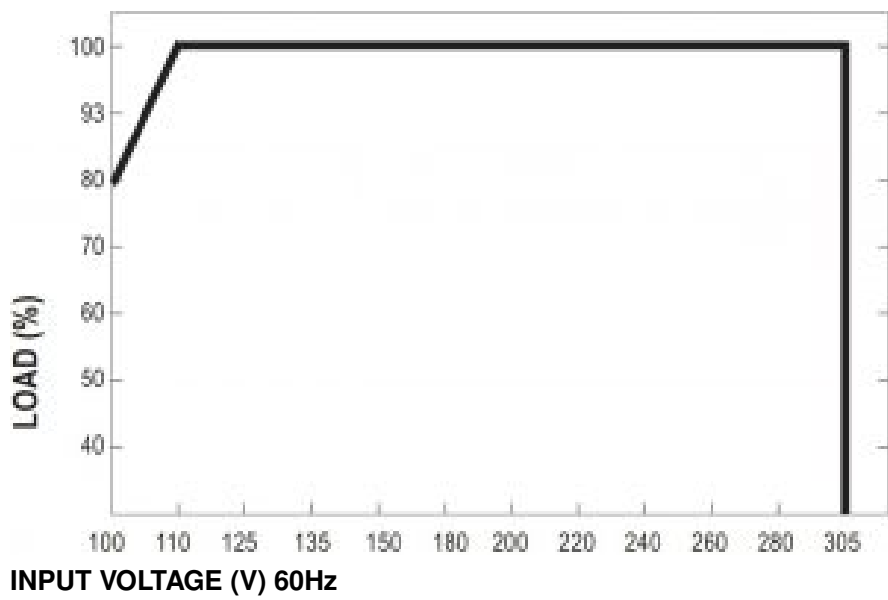


POWER FACTOR PF CHARACTERISTIC

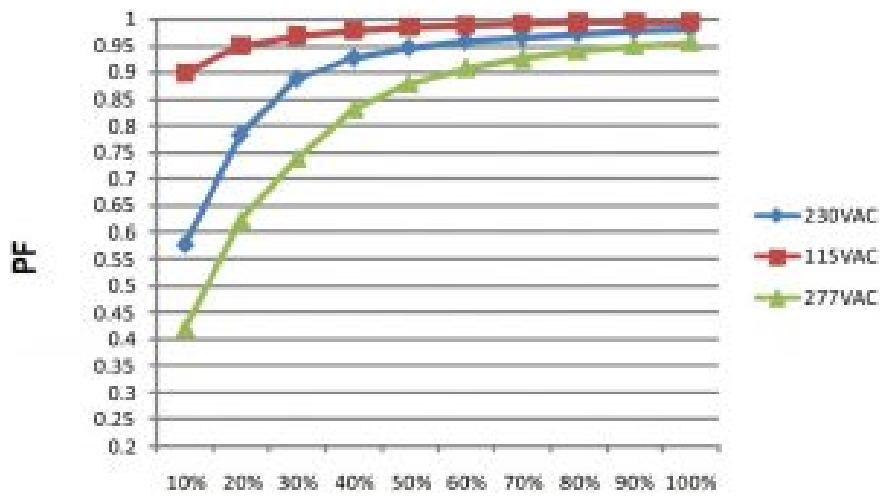

LOAD

TOTAL HARMONIC DISTORTION (THD)

48V Model, Tcase at 75°C

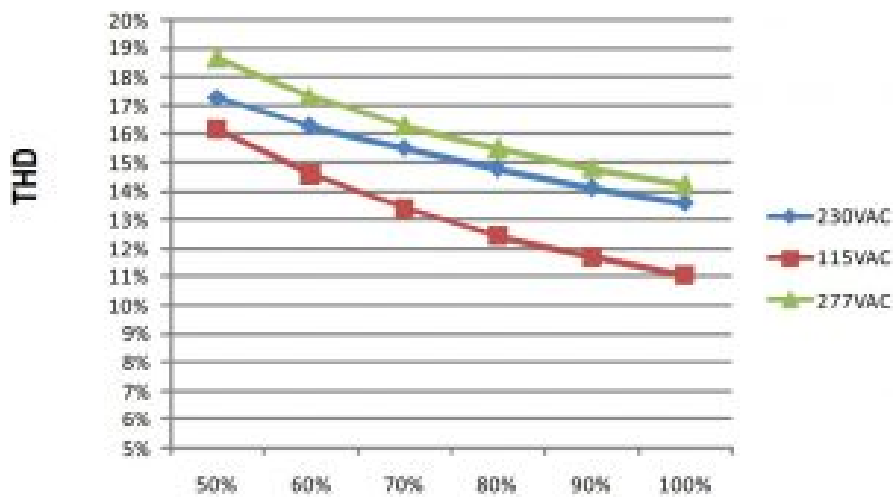


Load

EFFICIENCY LOAD


PWM KN -200 series possess superior working efficiency that up to 94% can be reached in field applications.

※ 48V Model, Tcase at 75°C

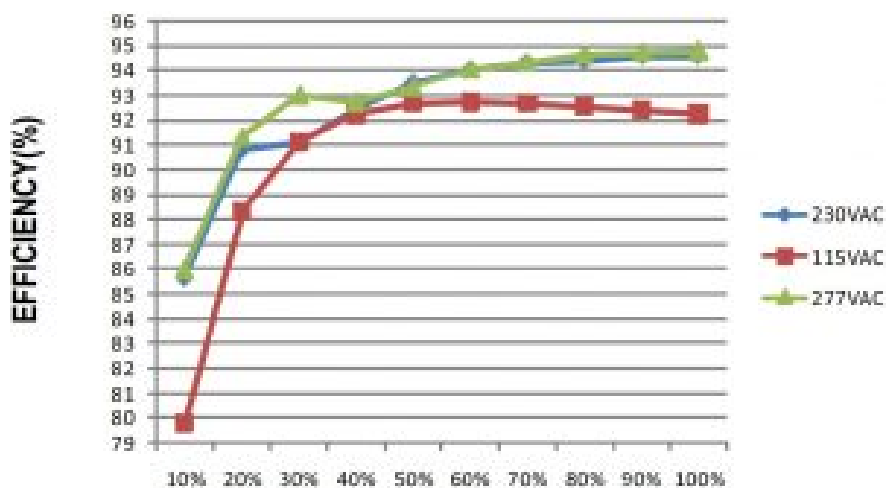


Load


LIFE TIME

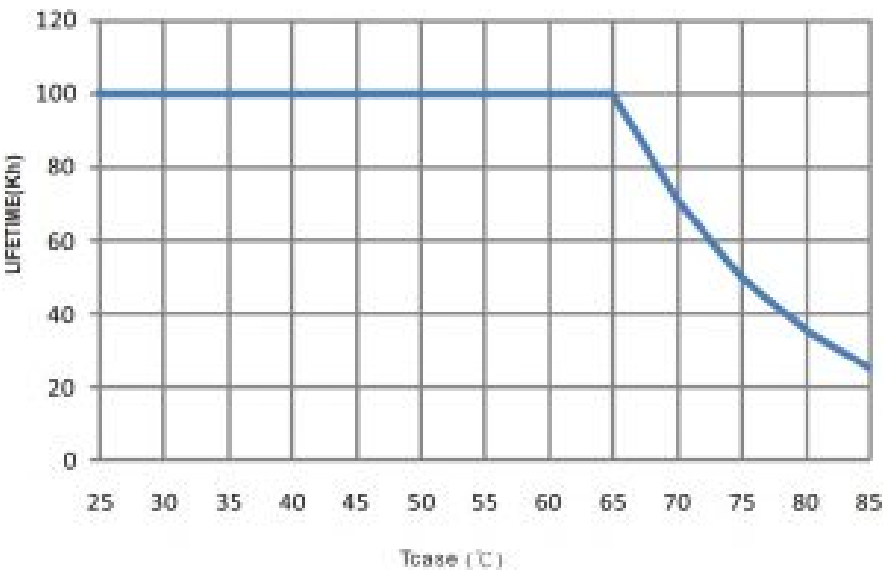

Block Diagram

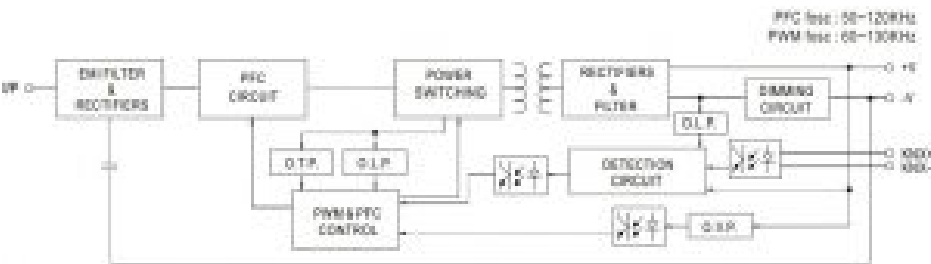

Mechanical Specification

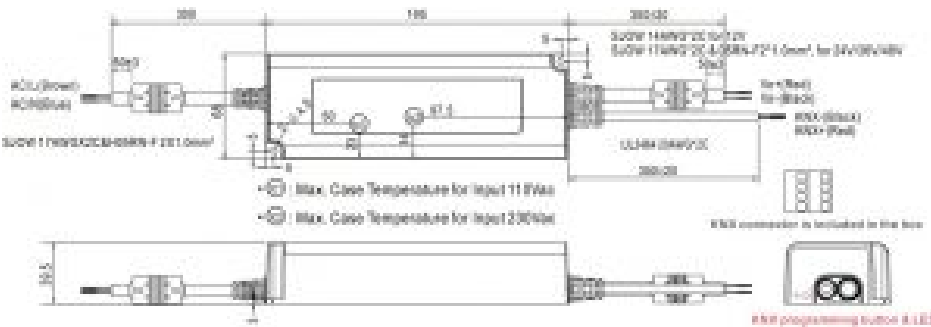


Recommend Mounting Direction



Installation Manual

Connection for KN-type

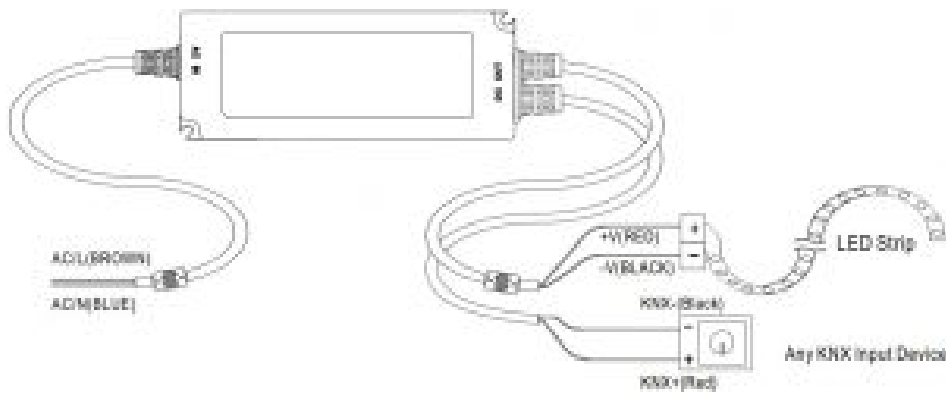


Cautions

- Before commencing any installation or maintenance work, please disconnect the power supply from the unit. Ensure that it cannot be re-connected inadvertently!
- Keep proper ventilation around the unit and do not stack any object on it. Also a 10-15 cm clearance must be kept when the adjacent device is a heat source.
- Mounting orientations other than standard orientation or operate under high ambient temperature may increase the internal component temperature and will require a de-rating in output.
- Current rating of an approved primary /secondary cable should be greater than or equal to that of the LED driver. Please refer to its specification.
- For LED drivers with waterproof connectors, verify that the linkage between the unit and the lighting fixture is tight so that water cannot intrude into the unit.
- Tc is identified on the product label. Please make sure that temperature of Tc point will not exceed limit.
- DO NOT connect "KNX- to -V".
- The power supply is considered as a component that will be operated in combination with final load. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.
- For more information about installation, Please refer to: <http://www.meanwell.com/manual.html> for details.



Documents / Resources



MW MEAN WELL 200W PWM Output Driver [pdf] User Manual
200W PWM Output Driver, PWM-200KN

References

- [MW Installation Manual-MEAN WELL Switching Power Supply Manufacturer](#)
- [MW Downloads-MEAN WELL Switching Power Supply Manufacturer](#)