

myTOUCH  
SMART

26892  
PLUG-IN  
TIMER



## myTouchSmart 26892 Plug-In Timer Instruction Manual

[Home](#) » [myTOUCHSMART](#) » myTouchSmart 26892 Plug-In Timer Instruction Manual 

### Contents

- [1 myTouchSmart 26892 Plug-In Timer](#)
- [2 PRODUCT INSTRUCTIONS](#)
- [3 PRODUCT OVERVIEW](#)
- [4 FREQUENTLY ASKED QUESTIONS](#)
- [5 VIDEO – PRODUCT OVERVIEW](#)
- [6 References](#)
- [7 Related Posts](#)


myTOUCH  
SMART

**myTouchSmart 26892 Plug-In Timer**





## PRODUCT INSTRUCTIONS

### 1. Setup

If no numbers are visible on-screen, plug the timer into an outlet and let the timer charge for 1 hour. Once charged, press the reset (  ) button in the lower right corner using a toothpick or pencil.







## 2. Set the time

Use up (  ) and down (  ) arrows to set the current time, and take note of AM or PM time.

## Programming Options

Set your custom on & off time and/or pick any of the presets that suit your schedule!

### 1. Choose your custom on/off times

Press “my on time,” then use the up (  ) and down (  ) arrows to set on time. Press “my off time,” then use up (  ) and down (  ) arrows to set off time. (If you set the “my on time” earlier than the current time, it will not turn on until the next day at the time scheduled. Use the Countdown to turn on the timer if needed immediately.) When using “my on” and “my off” times make sure the blue light is lit next to the button. The blue lights will only illuminate when plugged into a wall outlet.



## 2. Preset schedules

There are 3 pre-programmed times that run individually or simultaneously. Choose from the following:

- “evening” (5 pm-12 am)
- “morning” (5 am-8 am)
- “all night” (6 pm-6 am).

When a preset or custom program is chosen, the blue LED indicator light will turn on.

**If a preset schedule does not fit your needs, a custom on/off time can be used to modify the**

**preset. Example:** Using “evening” (5 pm-12 am) and adding a “my off time” of 10 pm will create a 5 pm-10 pm timer schedule.



## 3. Countdown


This feature turns the light on for a set period of time and turns it off when time expires. Press “countdown,” then use the up (  $\Delta$  ) and down (  $\nabla$  ) arrows to set it from 1 minute to 24 hours. Once you reach your desired time setting, simply walk away and the timer will begin counting down. Your last time setting will be remembered the next time you use the countdown feature.

**Note:** When daylight savings time occurs use the up (  $\Delta$  ) and down (  $\nabla$  ) arrows to adjust the time by 1 hour.



This device complies with part 15 of the FCC and Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

## PRODUCT OVERVIEW

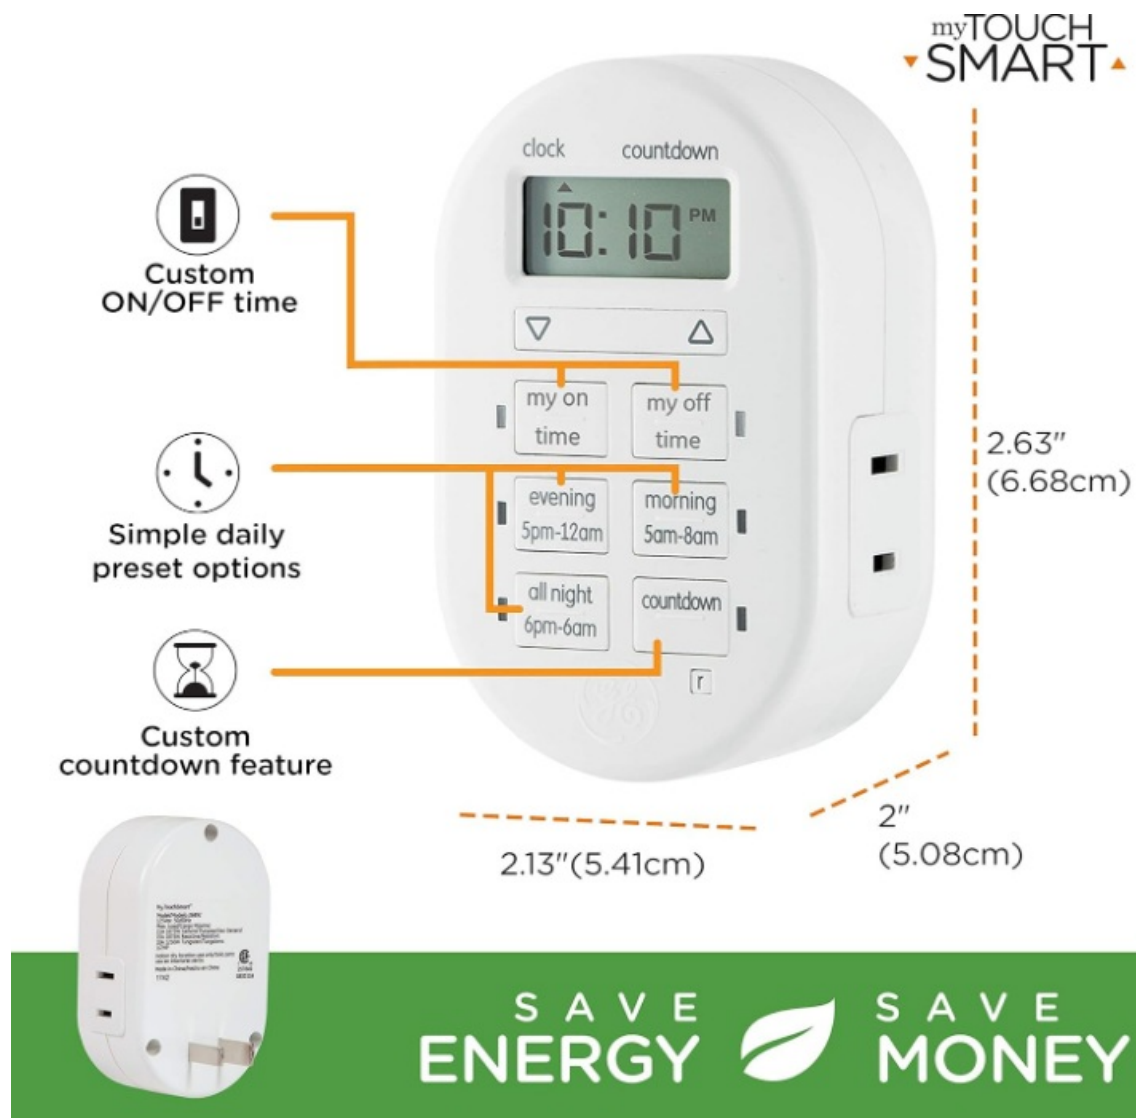

**FCC NOTE:** The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

MADE IN CHINA

Distributed by Jasco Products Company LLC, 10 E. Memorial Rd., Oklahoma City, OK 73114. This Jasco product comes with a 1-year limited warranty. Visit [www.byjasco.com](http://www.byjasco.com) for warranty details.

**Questions?** Contact us at 1-[800-654-8483](tel:800-654-8483) between 7:00 AM–8:00 PM CST.

**Specifications:**

- 125V 50/60 Hz
- 15A 1875W General Purpose/Resistive
- 10A 1250W Tungsten
- 1/2 HP

Works with dimmable LED and CFL bulbs.

**WARNING****RISK OF ELECTRIC SHOCK**

- PLUG DIRECTLY INTO AN ELECTRICAL OUTLET
- DO NOT USE IN WET LOCATIONS
- FULLY INSERT PLUG
- USE INDOORS ONLY
- UNPLUG TIMER BEFORE CLEANING
- KEEP CHILDREN AWAY

**RISK OF FIRE**

- DO NOT USE TO CONTROL APPLIANCES THAT CONTAIN HEATING ELEMENTS (COOKING APPLIANCES, HEATERS, IRONS, ETC.)
- DO NOT EXCEED ELECTRICAL RATINGS
- DO NOT USE WITH EXTENSION CORDS

CAN ICES-3(B)/NMB-3(B)

26892-P1 VERSION 01 10/11/16

**FREQUENTLY ASKED QUESTIONS**

What is the purpose of the myTouchSmart 26892 Plug-In Timer?

The myTouchSmart 26892 Plug-In Timer is designed to automate the operation of electrical devices such as lights and appliances, helping you set scheduled on/off times for convenience and energy efficiency.

How many settings does the myTouchSmart 26892 Plug-In Timer offer?

The myTouchSmart 26892 Plug-In Timer features 4 settings, allowing you to program multiple on/off

cycles for your electrical devices throughout the day.

What are the product dimensions of the myTouchSmart 26892 Plug-In Timer?

The myTouchSmart 26892 Plug-In Timer has dimensions of 2.55 inches (depth) x 5.92 inches (width) x 7.3 inches (height), making it a compact yet functional device for controlling your home electronics.

How much does the myTouchSmart 26892 Plug-In Timer weigh?

The myTouchSmart 26892 Plug-In Timer weighs only 4 ounces, offering a lightweight solution for scheduling and automating electrical devices.

What is the price of the myTouchSmart 26892 Plug-In Timer?

The myTouchSmart 26892 Plug-In Timer is priced at \$14.00, providing an affordable and effective way to automate electrical devices in your home.

What type of display does the myTouchSmart 26892 Plug-In Timer have?

The myTouchSmart 26892 Plug-In Timer features an LCD display, allowing for easy viewing and setting adjustments for the on/off schedules.

What is the warranty for the myTouchSmart 26892 Plug-In Timer?

The myTouchSmart 26892 Plug-In Timer comes with a one-year limited warranty, ensuring that it is covered for one year from the date of purchase.

Where is the myTouchSmart 26892 Plug-In Timer manufactured?

The myTouchSmart 26892 Plug-In Timer is manufactured in China by myTouchSmart, a brand known for creating user-friendly and reliable electrical products.



## VIDEO – PRODUCT OVERVIEW



[Download the PDF link: myTouchSmart 26892 Plug-In Timer 26892 Plug-Manual In-Timer-Instruction-Manual.mp4](#)

REFERENCE: [myTouchSmart 26892 Plug-In Timer Instruction Manual-Device.Report](#)

## References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.