

Neomounts® **DS22** **Series** **Desk** **Socket**



MANUALS.PLUS

Neomounts DS22 Series Desk Socket Instruction Manual

[Home](#) » [Neomounts](#) » Neomounts DS22 Series Desk Socket Instruction Manual 

Contents

- [1 Neomounts DS22 Series Desk Socket](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 Desk socket with clamp](#)
- [5 Intended use](#)
- [6 Important safety information](#)
- [7 Installation](#)
- [8 Operation](#)
- [9 Technical specifications](#)
- [10 Warranty](#)
- [11 FAQ](#)
- [12 Documents / Resources](#)
 - [12.1 References](#)

Neomounts®

Neomounts DS22 Series Desk Socket



Product Information

Specifications

- **Input Voltage:** 230VAC | 50Hz
- **IP Rating:** IP20
- **Socket Type:** Type F (Schuko)
- **Max. Power:** 3680W | 230VAC 16A
- **USB Ports:** 1x Type-A + 2x Type-C QC3.0 PD 20W
- **Power Cable:** 1.4m | H05VV-F | 3G 1.5mm²
- **Single Port Output:**
 - **C1:** 5VDC 3A | 9VDC 2.22A | 12VDC 1.67A
 - **C2:** 5VDC 3A | 9VDC 2.22A | 12VDC 1.67A
 - **A1:** 5VDC 3A | 9VDC 2A | 12VDC 1.5A

Product Usage Instructions

Installation:

1. Place the power strip on the desired position on a desktop (thickness max. 50 mm).
2. Secure the power strip to the desktop by rotating the clamp clockwise.
3. Connect the power cable to a wall socket.
4. Connect your devices to the power sockets or USB charging ports.

Operation

1. Push the on/off-button until you hear a click to switch-on the socket outlets. The indicator light will turn on to show the socket outlets are operational.
2. Push the on/off-button again to switch off the socket.
3. The indicator light will turn off to show that the socket outlets are switched off.
4. The USB charging ports provide power continuously when the power cable is plugged into a wall socket.

Dismantling


1. Disconnect the power cable from the mains (wall) plug.
2. Loosen the power strip from the desktop by rotating the clamp counter-clockwise.

Disposal

- Packaging materials and power socket must be disposed of according to local regulations. This product contains packaging materials that are recyclable.
- Please ensure that the material is properly sorted for recycling according to local guidelines.
- The text inside the symbol refers to the specific designated waste disposal bin according to local guidelines. This device is recyclable. Do not discard with general waste.

Desk socket with clamp

1. Power cable 1,4 m with Schuko plug
2. Schuko socket (3x)
3. Adjustable desk clamp
4. USB-C charging port (C1 & C2)
5. USB-A charging port (A1)
6. On/off switch with indicator light

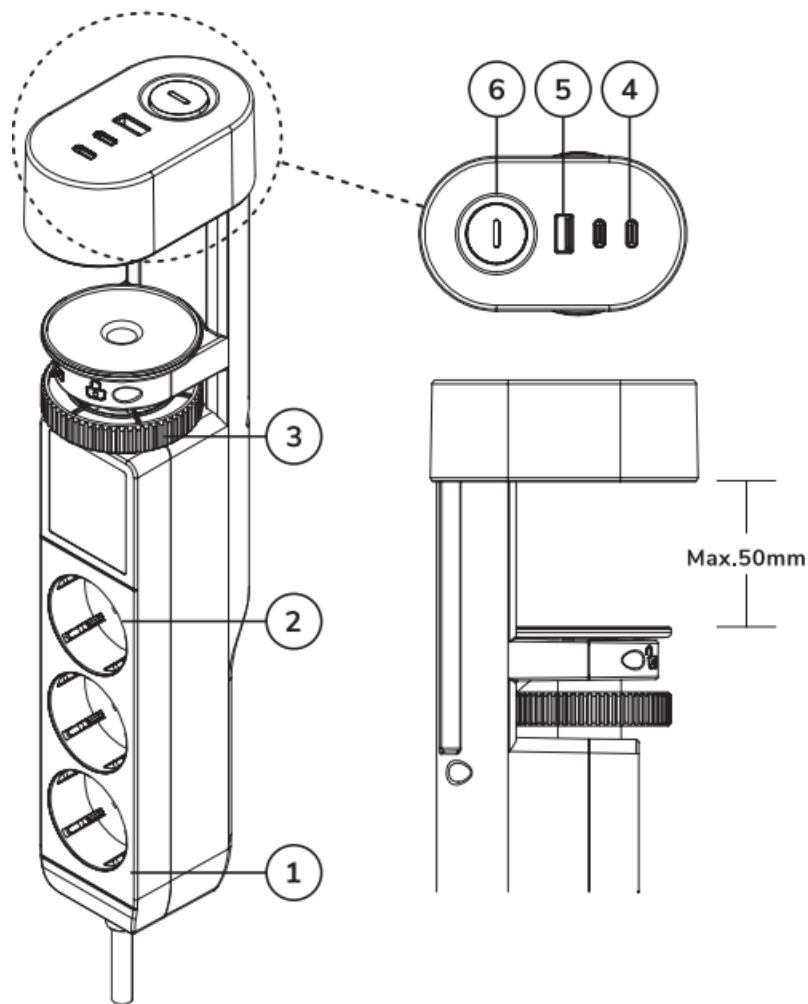

Intended use

- The desk-mounted power socket with USB ports is designed to connect up to three 230V devices and charge USB devices through the integrated quick-charging ports.
- To ensure safe and effective use, follow the manufacturer's instructions for correct installation.

Important safety information



- Please read this manual carefully before using the device and keep it for future reference. If anything is unclear, contact the seller for assistance.
- The manufacturer is not responsible for damage resulting from improper installation or use.
- Unauthorized modifications may result in damage or injury and are strictly prohibited. Any unauthorized repairs or modifications will void the warranty.
- The manufacturer reserves the right to make changes to product characteristics without affecting quality.



WARNING! There is a risk of electric shock! Do not use the product if it is damaged.

1. Disconnect from power before performing any maintenance.
2. Ensure the cable is fully extended during use to prevent overheating.

3. Do not touch bare contacts with metal objects.
4. Do not submerge the device in water or other liquids.
5. Do not handle the device with wet hands.
6. Do not use the product if the housing is damaged.
7. Do not connect in series.
8. Do not attempt to open or repair the device yourself.
9. Use the device only for its intended purpose.
10. Use only in dry indoor environments.
11. USB ports are intended for IT devices only.
12. Keep the device out of reach of children.
13. Do not cover the device during use.
14. Protect the device from direct sunlight, open flames, heat sources, and moisture.
15. Do not store the device in extreme temperatures or humid environments.
16. Prevent dust and moisture from entering the device.
17. Do not use any solvents or cleaning agents. Only clean the surface of the housing with a soft, dry, lint-free cloth. Make sure the power outlet is disconnected.
18. Follow the information under technical specifications for safe operating.
19. The manufacturer shall not be legally responsible for any equipment damage or personal injury caused by incorrect installation or operation other than in this manual covered.
20. Please consult the manual for any dispute on conditions.

Installation

- Place the power strip on the desired position on a desktop (thickness max. 50 mm).
- Secure the power strip to the desktop by rotating the clamp (3) clockwise.
- Connect the power cable (1) to a wall socket.
- Connect your devices to the power sockets (2) or USB charging ports (4 and 5).

Operation

1. Push the on/off-button (7) until you hear a click to switch-on the socket outlets (2). The indicator light will turn on to show the socket outlets are operational.
2. Push the on/off-button (7) again to switch off the socket.
3. The indicator light will turn off to show that the socket outlets are switched off.
4. The USB charging ports (4 and 5) provide power continuously when the power cable (1) is plugged into a wall socket.

Dismantling

1. Disconnect the power cable (1) from the mains (wall) plug.
2. Loosen the power strip from the desktop by rotating the clamp (3) counterclockwise.

Disposal

- Packaging materials and power sockets must be disposed of according to local regulations.



- This product contains recyclable packaging materials. Please ensure that the material is properly sorted for recycling according to local guidelines.



- The letters inside the symbol refer to the specific material that can be recycled. PAP20–22: paper and cardboard.
- The text inside the symbol refers to the specific designated waste disposal bin according to local guidelines.



- This device is recyclable. Do not discard with general waste.



Technical specifications

- 230VAC | 50Hz | IP20
- 3x socket | Type F (Schuko)
- **Max. power:** 3680W | 230VAC 16A
- 1x Type-A + 2x Type-C QC3.0 PD 20W
- **Power cable:** 1,4m | H05VV-F | 3G 1,5mm²

Single port output

- **C1:** 5VDC 3A | 9VDC 2,22A | 12VDC 1.67A
- **C2:** 5VDC 3A | 9VDC 2,22A | 12VDC 1.67A
- **A1:** 5VDC 3A | 9VDC 2A | 12VDC 1,5A

Multi-port output

- C1 + C2 + A1:
- 5VDC | 3,4A | 17W max.

Warranty

- This desk-mounted power socket is covered by a 5-year warranty against defects in materials and workmanship.
- During this period, should any issues arise due to manufacturing defects, the defective units will be replaced.
- Please note that this warranty does not cover damage resulting from misuse, improper handling, or normal

wear and tear.

Manufacturer

- Neomounts B.V.
- Wateringweg 62, 2031 EJ Haarlem, The Netherlands



FAQ

- **Q: What should I do if the product is damaged?**
 - **A:** Do not use the product if it is damaged. Contact the seller for assistance.
- **Q: Is it safe to make unauthorized modifications to the product?**
 - **A:** No unauthorized modifications may result in damage or injury and are strictly prohibited.
- **Q: What happens if I do not follow the manufacturer's instructions?**
 - **A:** The manufacturer shall not be legally responsible for any equipment damage or personal injury caused by incorrect installation or operation other than in this manual.

Documents / Resources



[Neomounts DS22 Series Desk Socket](#) [pdf] Instruction Manual
840BL6, 840WH6, DS22 Series Desk Socket, Desk Socket, Socket

References

- [User Manual](#)

[Manuals+.](#) [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.