



netvox R718PA11 Wireless Liquid Level Sensor User Manual

[Home](#) » [netvox](#) » netvox R718PA11 Wireless Liquid Level Sensor User Manual 

Contents

- [1 netvox R718PA11 Wireless Liquid Level Sensor](#)
- [2 Introduction](#)
- [3 Appearance](#)
- [4 Main Feature](#)
- [5 Set Up Instruction](#)
- [6 Data Report](#)
- [7 Installation](#)
- [8 Important Maintenance Instruction](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)
- [10 Related Posts](#)



netvox R718PA11 Wireless Liquid Level Sensor



Copyright©Netvox Technology Co., Ltd. This document contains proprietary technical information which is the property of NETVOX Technology. It shall be maintained in strict confidence and shall not be disclosed to other parties, in whole or in part, without written permission of NETVOX Technology. The specifications are subject to change without prior notice

Introduction

R718PA11 is a ClassA device based on the LoRaWANTM protocol of Netvox and is compatible with LoRaWAN protocol. R718PA11 can be connected with a liquid level sensor (RS485) and report the value of the liquid level collected by the device to the corresponding gateway.


LoRa Wireless Technology:

LoRa is a wireless communication technology dedicated to long distance and low power consumption. Compared with other communication methods, LoRa spread spectrum modulation method greatly increases to expand the communication distance. Widely used in long-distance, low-data wireless communications. For example, automatic meter reading, building automation equipment, wireless security systems, industrial monitoring. Main features include small size, low power consumption, transmission distance, anti-interference ability and so on.

LoRaWAN:

LoRaWAN uses LoRa technology to define end-to-end standard specifications to ensure interoperability between devices and gateways from different manufacturer

Appearance

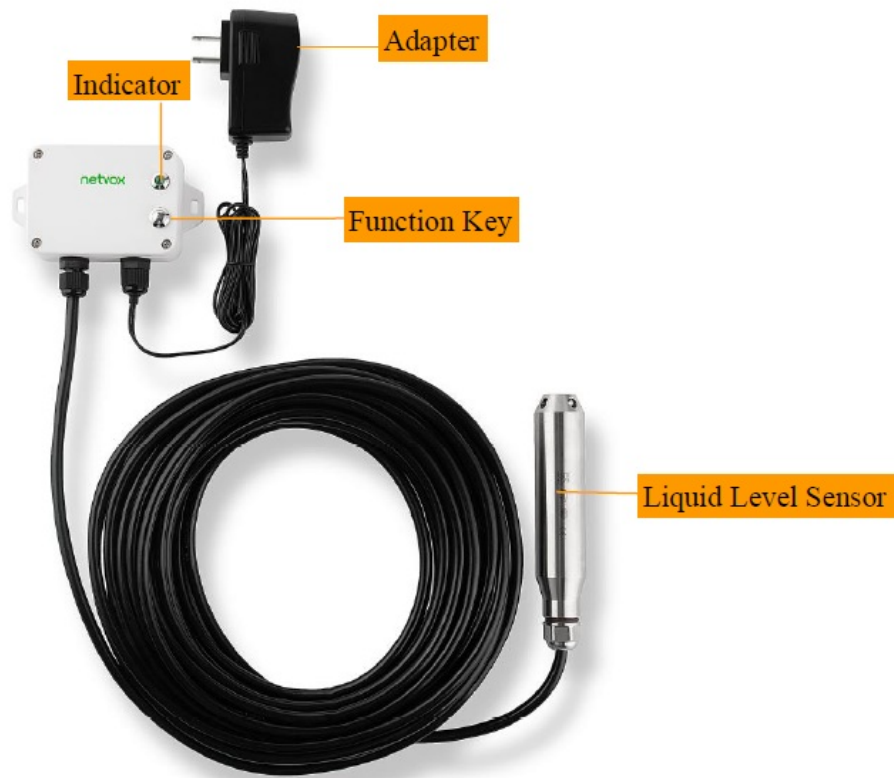

Main Feature

- Adopt SX1276 wireless communication module
- 12V DC power supply
- Liquid Level Detection
- The base is equipped with a magnet that can be attached to the iron object
- Host body protection level IP65 / 67
- Compatible with LoRaWANTM Class A
- Frequency hopping spread spectrum technology
- Configuring parameters and reading data via the third-party software platforms, and set alarms via SMS text and email (optional)
- Applicable to the third-party platforms: Activity/ ThingPark/ TTN/ MyDevices/ Cayenn

Set Up Instruction

On/Off

Power On	DC 12V adapter
Turn On	Press and hold the function key for 3 seconds till the green indicator flashes once.
Turn Off (Restore to factory setting)	Press and hold the function key for 5 seconds, and the green indicator flashes 20 times.
Power Off	Remove DC12V adapter
Note	<p>1. On/off interval is suggested to be about 10 seconds to avoid the interference of capacitor inductance and other energy storage components.</p> <p>2. The first five seconds after power on, the device will be in engineering test mode.</p>

Network Joining

Never Join the Network	<p>Turn on the device to search the network.</p> <p>The green indicator keeps on for 5 seconds: success. The green indicator remains off: fail</p>
Had Joined the Network (Not in the original setting)	<p>Turn on the device to search the previous network. The green indicator keeps on for 5 seconds: success.</p> <p>The green indicator remains off: fail.</p>
Fail to Join the Network	<p>Suggest to check the device registration information on the gateway or consulting your platform server provider if the device fails to join the network.</p>

Function Key

Press and Hold for 5 Seconds	<p>Restore to the original setting / turn off</p> <p>The green indicator flashes 20 times: success The green indicator remains off: fail</p>
Press once	<p>The device is in the network: the green indicator flashes once and the device sends a data report</p> <p>The device is not in the network: the green indicator remains off</p>

Data Report

After power on, the device will immediately send a version packet report. Then, it will send another report with the data of the value of the liquid level after it is powered on for 20s.

The device sends data according to the default configuration before any other configuring.

Default setting:

MaxTime: Max Interval = 3min = 180s MinTime: The MinTime configuration is not available. *But the software has restriction, MinTime must be configured a number greater than 0.

Note:

Report interval is based on the factory default. R718PA11 reports the value of the liquid level.

The device reported data parsing please refer to Netvox LoraWAN Application Command document and Netvox Lora Command Resolver <http://loraresolver.netvoxcloud.com:8888/page/index>


Report Configuration

Description	Device	Cm d I D	Dev ic e Typ e	NetvoxPayLoadData		
ConfigRepo rt Req	R718PA 11	0x0 1	0x5 7	MinTime (2bytes Unit: s)	MaxTime (2bytes Unit: s)	Reserved (5Bytes,Fixed 0x0 0)
ConfigRepo rt Rsp		0x8 1		Status (0x00_success)	Reserved (8Bytes, Fixed 0x00)	
ReadConfig ReportReq		0x0 2		Reserved (9Bytes, Fixed 0x00)		
ReadConfig ReportRsp		0x8 2		MinTime (2bytes Unit: s)	MaxTime (2bytes Unit: s)	Reserved (5Bytes,Fixed 0x0 0)

1. Configure R718PA11 device parameter MaxTime = 1min Downlink: 0157000A003C0000000000 Device Return: 815700000000000000000000 (configuration success) 815701000000000000000000 (configuration failure)
2. Read R718PA11 device parameter Downlink: 025700000000000000000000 Device Return: 8257000A003C0000000000 (device current parameter)

Installation

R718PA11 has the built-in magnet (as the figure below) which can be attached to the surface of an iron object during installation, which is convenient and quick. In order to make the installation firmer, please use screws (purchased separately) to fix the device to the wall or other surface (as Figure below).

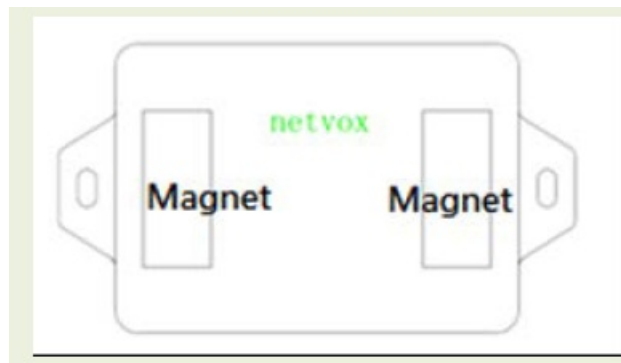


Note: Do not install the device in a metal shielded box or in an environment surrounded by other electrical equipment to avoid affecting the wireless transmission of the device.

R718PA11 regularly reports the data of the liquid level according to MaxTime. The default Max Time is 3 minutes.

Note: MaxTime can be modified by the downlink command, but it is recommended not to set the interval too short.

R718PA11 can be applied to detecting the liquid level.

Example: Liquid Depth Monitor

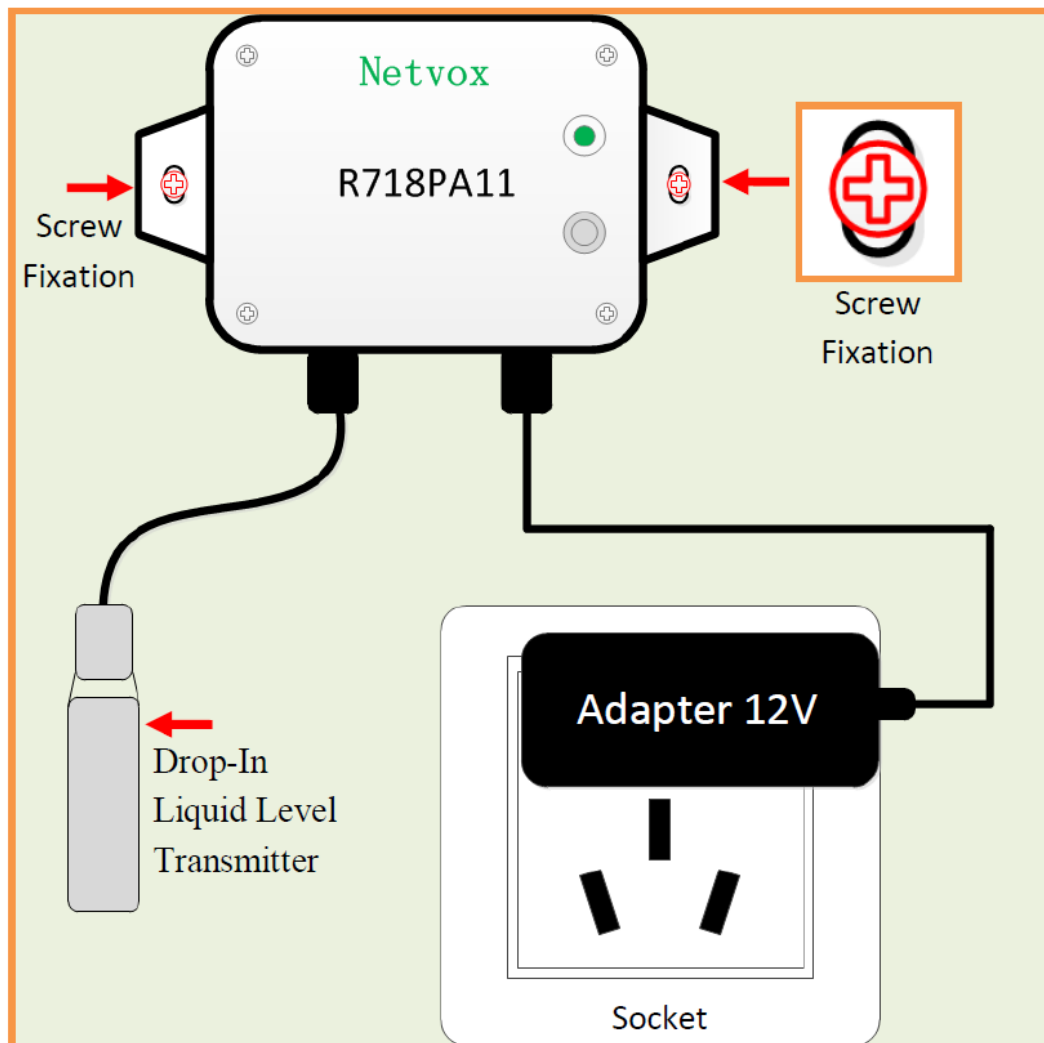


Important Maintenance Instruction

Kindly pay attention to the following in order to achieve the best maintenance of the product

- Keep the equipment dry. Rain, moisture and various liquids or water may contain minerals that can corrode electronic circuits. In case the device is wet, please dry it completely.
- Do not use or store in dusty or dirty areas. This way can damage its detachable parts and electronic components.
- Do not store in excessive heat place. High temperatures can shorten the life of electronic devices, destroy batteries, and deform or melt some plastic parts.
- Do not store in excessive cold place. Otherwise, when the temperature rises to normal temperature, moisture will form inside which will destroy the board.
- Do not throw, knock or shake the device. Treating equipment roughly can destroy internal circuit boards and delicate structures.
- Do not wash with strong chemicals, detergents or strong detergents.
- Do not paint the device. Smudges can make debris block detachable parts up and affect normal operation.
- Do not throw the battery into the fire to prevent the battery from exploding. Damaged batteries may also explode

All the above suggestions apply equally to your device, batteries and accessories. If any device is not operating properly, please take it to the nearest authorized service facility for repairing.

Documents / Resources

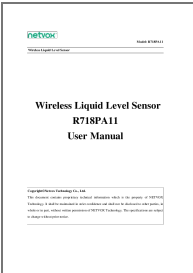	netvox R718PA11 Wireless Liquid Level Sensor [pdf] User Manual R718PA11, Wireless Liquid Level Sensor, R718PA11 Wireless Liquid Level Sensor
--	---

References

-  [Netvox Command Resolver](#)