



NITECORE EC11 Flashlight User Manual

[Home](#) » [Nitecore](#) » NITECORE EC11 Flashlight User Manual 

Contents

- [1 NITECORE EC11 Flashlight](#)
- [2 Features](#)
- [3 Dimensions](#)
- [4 Output & Runtime](#)
- [5 Operating Instructions](#)
 - [5.1 Battery installation](#)
- [6 Power Tips](#)
- [7 Changing / Charging Battery](#)
- [8 Maintenance](#)
- [9 Warranty Service](#)
- [10 Documents / Resources](#)
- [11 Related Posts](#)

NITECORE®
The All-Round Flashlight Expert

NITECORE EC11 Flashlight

Features

- Utilizes CREE XM-L2 (U2) LED
- Maximum output of 900 lumens
- A micro-textured reflector offers wide angle lighting
- Boasts a peak beam intensity of 9000 cd and a throw distance of up to 190 meters
- Dual-switch design ensures unprecedented ease of use
- Secondary red LED provides constant I flashing illumination
- Indicates battery voltage with a red flashing LED (accurate to 0.1V)
- High efficiency constant current circuit enables maximum runtime of up to 20 hours
- Direct access to ultra-low and turbo output
- Reverse polarity protection prevents damage from an incorrectly inserted battery
- Detachable anti-rolling clip
- Toughened ultra-clear mineral glass with anti-reflective coating
- Constructed from aero grade aluminum alloy
- HAIII military grade hard-anodized
- Waterproof in accordance with IPXB (2 meters submersible)
- Impact resistant to 1 meter
- Tail stand capability







Dimensions







- Length: 2.95" (75mm)
- Head diameter: 1" (25.4mm)
- Tail diameter: 1" (25.4mm)
- Weight: 1.60oz (45.3 gram) (without battery)

Accessories

Quality holster, (R)CR123 battery magazine, clip, lanyard, spare o ring

Output & Runtime

FL 1 STANDARD	TURBO	HIGH	MID	LOW	LOWER	RED LIGHT	SIGNAL LIGHT	STROBE	LOCATION	SOS
	900 LUMENS	300 LUMENS	160 LUMENS	70 LUMENS	1 LUMEN	0.8 LUMENS	0.8 LUMENS	900 LUMENS	900 LUMENS	900 LUMENS
	30min	45min	1h30min	2h30min	12h	23h	24h	—	—	—
	190m	122m	88m	40m	5.8m	2.5m	—	—	—	—
	9000cd	3800cd	1950cd	380cd	8.5cd	1.5cd	—	—	—	—
	1 m (Impact Resistant)									
	IPX8, 2m (Waterproof AND Submersible)									


FL 1 STANDARD	TURBO	HIGH	MID	LOW	LOWER	RED LIGHT	SIGNAL LIGHT	STROBE	LOCATION	SOS
	430 LUMENS	230 LUMENS	100 LUMENS	40 LUMENS	1 LUMEN	0.8 LUMENS	0.8 LUMENS	430 LUMENS	430 LUMENS	430 LUMENS
	45min	1h30min	3h15min	8h30min	20h	18h	20h	—	—	—
	125m	89m	62m	24m	5.8m	2.5m	—	—	—	—
	3900cd	2000cd	980cd	150cd	8.5cd	1.5cd	—	—	—	—
	1 m (Impact Resistant)									
	IPX8, 2m (Waterproof AND Submersible)									

Operating Instructions

Battery installation

WARNING:

1. Ensure the battery is inserted with the positive (+) end pointing towards the head. The EC11 will not be operational with an incorrectly inserted battery.
2. The included battery magazine securely holds the (R)CR123 battery in place, thus stopping battery movement in the compartment.
3. Please stop using and remove a depleted IMR18350 battery to avoid potential battery damage.

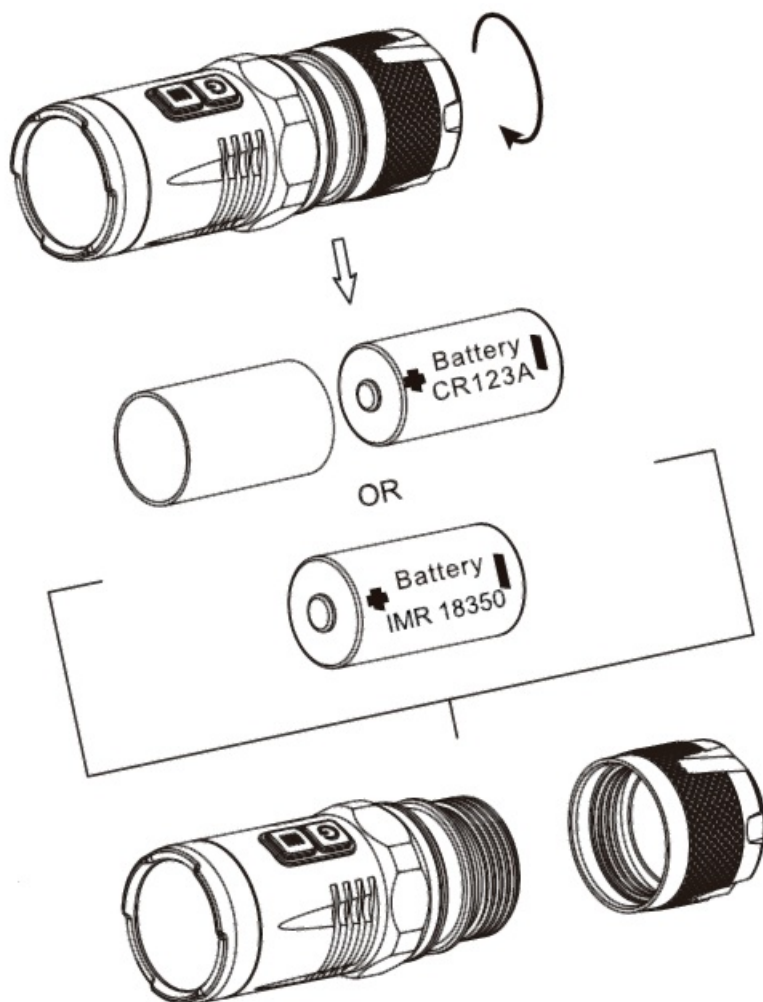

On / Off Operation

To switch ON: Press the ON/OFF button once.

To switch OFF: Press the ON/OFF button once again to switch the light off and enter standby mode

Standby Mode

With the light switched on, press and hold the ON/OFF button for more than one second to switch the light off and activate the secondary red LED to flash once every three seconds, thus helping the user locate the EC11 in dark conditions. When using a CR123 battery, the EC11 will operate for up to 6 consecutive days with the red LED on, or remain on standby for more than 170 days with the red LED off.

Brightness Levels

With the EC11 switched on, press the MODE button repeatedly to cycle through the following brightness levels: ultra-low, low, medium, high and turbo. Once a mode is selected it will be saved and resumed when the EC11 is reactivated.

Instant Ultra-low Output

With the light switched off, press and hold the ON/OFF button for more than one second to access ultra-low mode (1 lumen).

Instant Turbo Output

With the light switched off, press and hold the MODE button for more than one second to access turbo mode (900 lumens).

NOTE: When in turbo mode, the EC11 will adjust output luminance automatically within 3 minutes of use to prevent overheating and extend battery longevity.

Red Light / Signal Light Mode

With the light switched off, press the MODE button to enter red light mode. In this mode, the secondary red

LED will illuminate steadily.

When in red light mode, press and hold the MODE button [i] for more than one second to enter signal light mode.

In this mode, the secondary red LED will flash to serve as a signal light.

Simply press any button to exit the red light /signal light mode.

Special modes (Strobe/Location/SOS)

With the light switched on, press and hold the MODE button [i] for more than one second to enter Strobe mode.

When in strobe mode, press and hold the MODE button [i] for more than one second again to cycle through Location Beacon, SOS and Strobe modes. To exit, simply press the MODE button [i] to resume the last used brightness level, or press the ON/OFF button to switch the light off.

Strobe Ready

With the light switched off, press the MODE button [i] twice in quick succession to enter Strobe mode. To exit, simply press any button.

Lockout / Unlock

With the light switched on, press and hold the ON/OFF button [i2] and the MODE button [i] simultaneously for over one second to switch the light off and enter lockout mode. In lockout mode, the EC11 conserves battery power for over 170 days; the two buttons on EC11 will not work, thus preventing accidental activation of the light. To exit lockout mode, simply press and hold the


ON/OFF : button [i] and the MODE button [i] simultaneously for over one second again.

NOTE

1. When entering lockout mode, the secondary red LED will continuously flash to indicate battery voltage. Please refer to the "Power Tips" section for more details.
2. When the EC11 is kept in a backpack or left unused for extended periods, Nitecore recommends the tailcap is loosened or battery is removed to cut off the power entirely, thus preventing accidental activation of the flashlight or battery leakage .

Power Tips

After battery installation or lockout mode activation, the secondary red LED will flash to indicate battery voltage (accurate to 0.1V). For example, when battery voltage is at 4.2V, the red LED will flash 4 times, followed by a one second pause and another 2 flashes. Different voltages represent the corresponding remaining battery power levels:

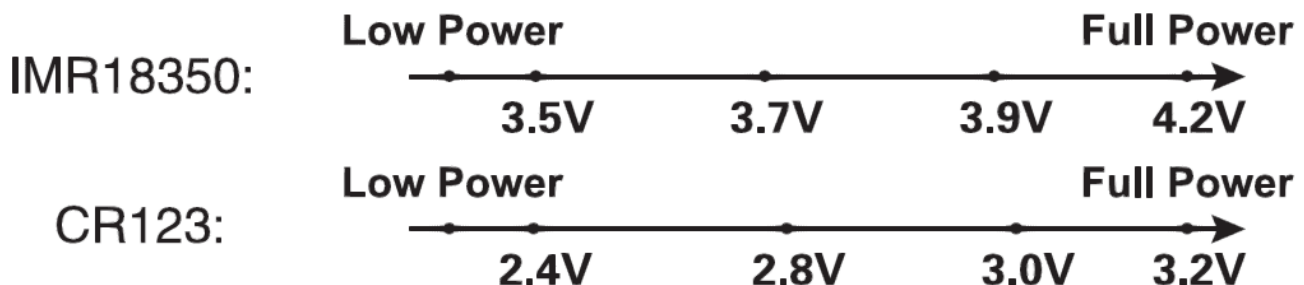

Changing / Charging Battery

Battery should be replaced or recharged when output appears to be dim or the flashlight becomes unresponsive.

Maintenance

Every 6 months, threads should be wiped with a clean cloth followed by a thin coating of

silicon-based lubricant.

Warranty Service

All NITECORE® products are warranted for quality. Any defective / malfunctioning NITECORE® product can be repaired free of charge for a period of 60 months (5 years) from the date of purchase. Beyond 60 months (5 years), a limited warranty applies, covering the cost of labor and maintenance, but not the cost of accessories or replacement parts.

The warranty is nullified in all of the following situations:

1. The product(s) is/are broken down, reconstructed and/or modified by unauthorized parties.
2. The product(s) is/are damaged through improper use.
3. The product(s) is/are damaged by leakage of batteries.

For the latest information on NITECORE® products and services, please contact a local NITECORE® distributor or send an email to service@nitecore.com

*All images, text and statements specified herein this user manual are for reference purpose only. Should any discrepancy occurs between this manual and information specified on www.nitecore.com, information on our official website shall prevail. Sysmax Industry Co., Ltd. reserves the rights to interpret and amend the content of this document at any time without prior notice.

NITECORE®

The All-Round Flashlight Expert


+86-20-83882723

info@nitecore.com

www.nitecore.com

Rm 2601-06, Central Tower, No.5 Xiancun Road, Tianhe District, Guangzhou, 510623, Guangdong, China

Documents / Resources

	<p>NITECORE EC11 Flashlight [pdf] User Manual EC11, Flashlight</p>
---	--