



# NITECORE MT1A Lumen EDC LED Flashlight User Manual

[Home](#) » [Nitecore](#) » NITECORE MT1A Lumen EDC LED Flashlight User Manual 

## NITECORE®

The All-Round Flashlight Expert

### Contents

- [1 Features](#)
- [2 Dimensions](#)
- [3 Accessories](#)
- [4 Battery Options](#)
- [5 Brightness & Runtime](#)
- [6 Operation instructions](#)
- [7 Switching ON/OFF](#)
- [8 Maintenance](#)
- [9 Warranty Service](#)
- [10 Documents / Resources](#)
  - [10.1 References](#)

## Features

- LED Premium CREE XP-G2 R5 LED
- Maximum output of up to 180 lumens
- High efficiency current circuit board
- Maximum runtime of up to 60 hours
- Two rapid switching modes suit various user requirements.
- User-defined mode allows for customized brightness levels and a multitude of functions
- Intelligent memory functions
- Anti-rolling design
- Reverse polarity protection
- Toughened ultra-clear mineral glass with anti-reflective coating

- Aluminum reflector ensures a smooth and powerful beam
- Aero grade aluminum alloy
- HA III Military grade hard anodized
- Detachable two-way anti-rolling clip
- Purpose-made rhombic knurling for better grip

## Dimensions

Length: 105mm (4.13")

Head Diameter: 22.56mm (0.92")

Tail Diameter: 21.5mm (0.85")

Weight: 55grams (1.94oz)(without battery)






## Accessories

Clip, lanyard, spare plastic cap, and spare O-ring

## Battery Options

	TYPE	Nominal voltage	Usability
Primary AA battery	AA	1.5V	Y (Recommended)
Rechargeable AA battery	AA	1.2V	Y (Recommended)
Primary AA Lithium battery	L91	1.5V	Y (Recommended)
Rechargeable Li-ion battery	14500	3.7V	N (Banned)

## Brightness & Runtime

FL 1 STANDERD	TURBO	HIGH	MID	LOW	SOS	STROBE
	180 LUMENS	55 LUMENS	22 LUMEN S	5 LUMENS	180 LUMEN S	180 LUMEN S
	1h30min	5h30min	18h	60h	_____	_____
	115m	77m	55m	33m	_____	_____
	3350cd	1500cd	755cd	280cd	_____	_____
	1m (Impact Resistant)					
	IPX8, 2m (Waterproof AND Submersible)					


#### NOTICE

Stated data has been measured according to the international flashlight testing standards ANSI/NEMA FL1 using one high quality AA Ni-Mh rechargeable battery (1.2V, 2400mAh) under laboratory conditions. The data may vary due to individual usage habits and environmental conditions.

#### Operation instructions

##### Battery Installation /Removal

As illustrated, after unscrewing the battery cap, insert / remove the battery(s) and screw to tighten the battery cap.

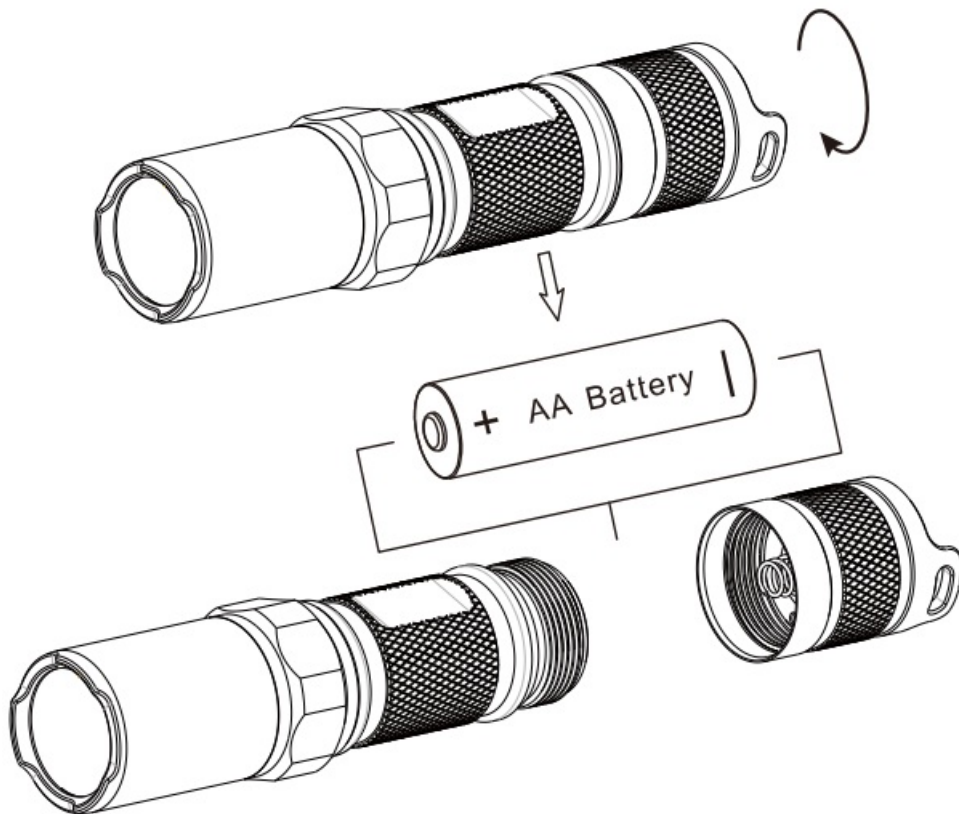

### Battery installation

1. Unscrew the tail cap in a counter-clockwise direction.
2. Insert one AA battery or other compatible batteries with the positive pole pointing forward (toward the light head).

### WARNING

Ensure batteries are inserted with the positive (+) end pointing to the head.  
The MT1A will not operate with incorrectly inserted batteries.

### Switching ON/OFF

**Switch ON:** Press the button on the tailcap until a “click” is heard.

**Switch OFF:** Press the button at the tailcap until a second time until a “click” is heard.

#### Mode Switching

The Nitecore MT1A has two modes: Turbo and user-defined. These two modes can be changed by simply tightening and loosening the flashlight head. Turbo provides 100% output while user-defined users contains five selectable sub-modes.

#### Turbo Mode

Turbo mode is accessed when the MT1A flashlight is switched ON and the head lightly tightened. While in this mode, momentary illumination can be achieved by switching off the flashlight and then half pressing and holding the switch. Momentary illumination can be used as a flashing signal indicator or apply to various tactical applications.

**Note:** After three minutes’ using of turbo mode, the flashlight will lower its output automatically for preventing overheating, and efficiently ensure the battery runtime.

#### User-Defined Mode

User-defined mode is accessed by slightly loosening the flashlight head. In this mode, lightly and rapidly pressing the switch will cycle through brightness and other functions in the following order: “High-Mid-Low- SOS-Strobe”. Pressing the switch all the way down will save and memorize a desired setting.

**Tips: Make NITECORE MT1A your perfect multi-task flashlight.**

NITECORE MT1A flashlights essentially have two modes: Turbo mode (100% output) and custom mode. Turbo mode is accessed by tightening the flashlight head while any of one of the four customizable modes (strobe, low, medium and high) are selected by loosening the head and rapidly pressing the on/off switch to cycle through the

modes. A given mode can be saved by simply turn off the light while in that mode. Real-world examples include: When used as a flashlight around the home, the head can be loosened and low level selected in custom mode, providing long runtimes at a lower light intensity. The same flashlight could then be taken out and used a law-enforcement duty light, with user-defined mode set in strobe, making it easy to alternate between turbo mode and strobe with a simple twist of the flashlight head.

## Maintenance

Every 6 months, threads should be wiped with a clean cloth followed by a thin coating of silicon-based lubricant.

## Warranty Service

All NITECORE® products are warranted for quality. Any defective / malfunctioning NITECORE® product can be repaired free of charge for a period of 60 months (5 years) from the date of purchase. Beyond 60 months (5 years), a limited warranty applies, covering the cost of labor and maintenance, but not the cost of accessories or replacement parts.

The warranty is nullified in all of the following situations:

1. The product(s) is/are broken down, reconstructed and/or modified by unauthorized parties.
2. The product(s) is/are damaged through improper use.
3. The product(s) is/are damaged by leakage of batteries.

For the latest information on NITECORE® products and services, please contact a local NITECORE® distributor or send an email to [service@nitecore.com](mailto:service@nitecore.com)

※All images, text and statements specified herein this user manual are for reference purpose only. Should any discrepancy occurs between this manual and information specified on [www.nitecore.com](http://www.nitecore.com), information on our official website shall prevail.

SYSMAX Innovations Co., Ltd. reserves the rights to interpret and amend the content of this document at any time without prior notice.



Please find us on facebook: NITECORE Flashlight

# NITECORE®

SYSMAX Innovations Co., Ltd."

TEL: +86-20-83862000

FAX: +86-20-83882723

E-mail: [info@nitecore.com](mailto:info@nitecore.com)

Web: [www.nitecore.com](http://www.nitecore.com)

Address: Unit 6355, 5/F, No. 1021 Gaopu Road  
Tianhe District, Guangzhou, 510653, Guangdong, China



Thanks for purchasing NITECORE!

MT27061A22

Made in China

## Documents / Resources



[NITECORE MT1A Lumen EDC LED Flashlight](#) [pdf] User Manual  
MT1A Lumen EDC LED Flashlight, MT1A, Lumen EDC LED Flashlight, EDC LED Flashlight, LE  
D Flashlight, Flashlight

References

- [!\[\]\(756219e9389f679d57027482aa5cf5fc\_img.jpg\) NITECORE](#)