

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [I-K-E-A](#) /
- › [I-K-E-A UTRUSTA Hinge 110 Degree Instruction Manual](#)

I-K-E-A 805.248.82

I-K-E-A UTRUSTA Hinge 110 Degree Instruction Manual

Model: 805.248.82

INTRODUCTION AND PRODUCT OVERVIEW



Figure 1: I-K-E-A UTRUSTA 110 Degree Hinges (12-pack).

This manual provides comprehensive instructions for the installation, operation, and maintenance of the I-K-E-A UTRUSTA 110 Degree Hinge with integrated damper. Designed for kitchen cabinet doors, these hinges ensure a slow, soft, and silent closing mechanism, contributing to an efficient and functional kitchen environment. The UTRUSTA hinge is a crucial component for achieving optimal workflow and space utilization in your kitchen.

PRODUCT FEATURES

- **Integrated Damper:** Ensures the door closes slowly, softly, and silently, preventing slamming.
- **Damper Deactivation:** Easily deactivate the damper using a slide button. This feature is useful if you intend to use a push-to-open mechanism or prefer a faster closing speed. The damper can be re-activated at any time.
- **Adjustable Position:** The hinges offer precise adjustment capabilities in height, depth, and width, allowing for perfect alignment of the cabinet door.
- **Snap-on Installation:** Designed for tool-free mounting onto the door, simplifying the initial setup and enabling easy removal for cleaning or repositioning.
- **Durable Construction:** Manufactured from high-quality steel with a nickel-plated finish, ensuring long-lasting performance and resistance to corrosion.

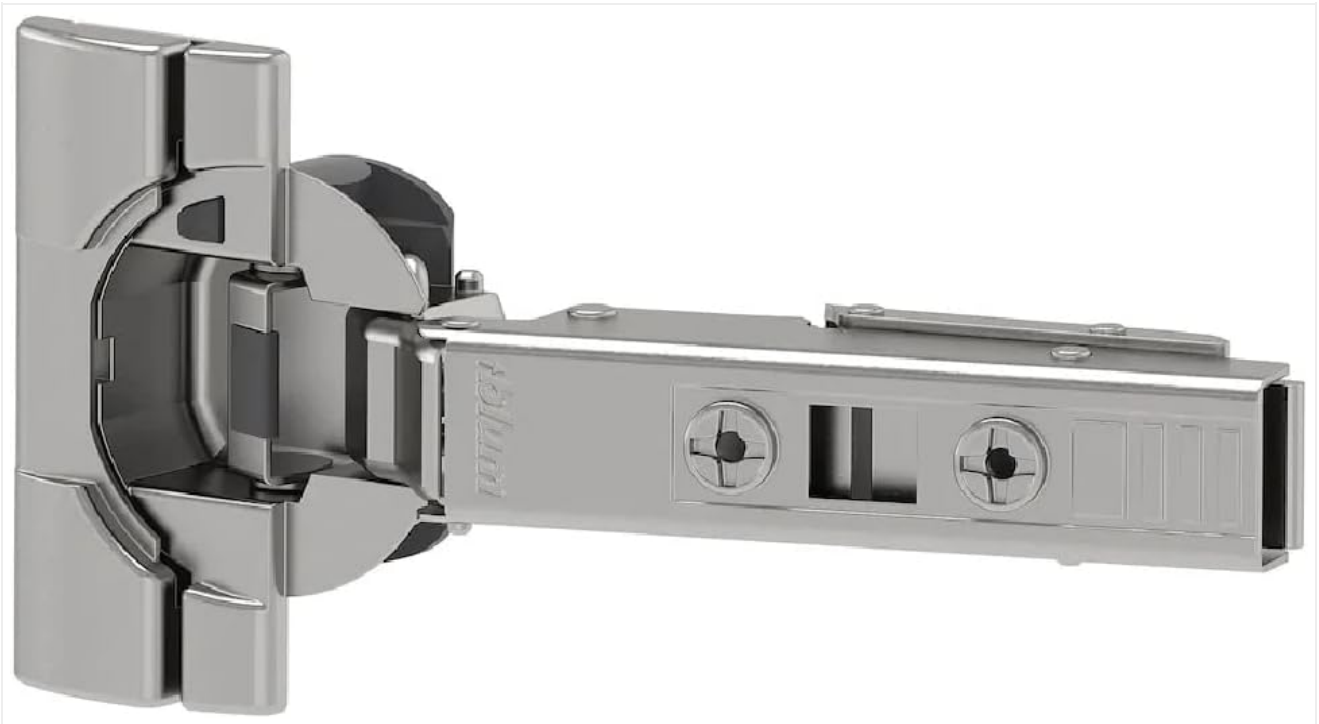


Figure 2: Detailed view of the UTRUSTA Hinge, highlighting its robust design and adjustment points.

SETUP AND INSTALLATION

The I-K-E-A UTRUSTA hinges are designed for straightforward installation. Follow these steps for proper mounting and adjustment:

1. **Prepare Cabinet and Door:** Ensure the cabinet frame and door are clean and free of debris. Identify pre-drilled holes for hinge plates on the cabinet and hinge cups on the door.
2. **Attach Hinge Cups to Door:** Align the hinge cups with the pre-drilled holes on the cabinet door. The snap-on mechanism allows for attachment without screws directly to the door.
3. **Mount Hinge Plates to Cabinet:** Secure the hinge mounting plates to the inside of the cabinet frame using appropriate screws (typically provided with the cabinet or hinge).
4. **Connect Door to Cabinet:** Align the hinges on the door with the mounting plates on the cabinet. Snap the hinges onto the plates.
5. **Adjust Door Position:** Use the adjustment screws on the hinge to fine-tune the door's position.
 - **Height Adjustment:** Adjusts the door up or down.
 - **Depth Adjustment:** Moves the door closer to or further from the cabinet frame.
 - **Width Adjustment:** Adjusts the side-to-side position of the door.



Figure 3: UTRUSTA Hinge installed on a cabinet, demonstrating its integration.

OPERATING THE DAMPER

The integrated damper provides a soft-closing function. You can activate or deactivate this feature as needed:

- **Activating the Damper:** Ensure the slide button on the hinge is in the 'on' position. When activated, the door will close slowly and silently.
- **Deactivating the Damper:** Locate the small slide button on the hinge body. Slide it to the 'off' position. This will allow the door to close without the soft-closing action, which is useful if you are using a push-to-open mechanism or prefer the door to close more quickly.

MAINTENANCE

Proper maintenance ensures the longevity and smooth operation of your UTRUSTA hinges:

- **Cleaning:** Wipe clean with a dry cloth. For more stubborn marks or grime, wipe clean with a water-dampened soft cloth and a mild non-abrasive dish detergent or soap, if necessary. Always dry thoroughly after cleaning.

Avoid harsh chemicals, abrasive cleaners, or scouring pads, as these can damage the finish.

- **Inspection:** Periodically check all mounting screws for tightness. Re-tighten any loose screws to prevent sagging or misalignment of cabinet doors.
- **Lubrication:** The hinges are designed for maintenance-free operation and do not typically require lubrication. Do not apply lubricants unless specifically instructed by I-K-E-A support, as this may interfere with the integrated damper mechanism.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Door does not close softly or slams.	Integrated damper is deactivated or faulty.	Check the damper slide button on the hinge and ensure it is in the 'on' (activated) position. If the issue persists after activation, the damper may be faulty and require hinge replacement.
Door is misaligned, sagging, or not closing flush.	Loose hinge mounting screws or improper adjustment.	Tighten all mounting screws securing the hinge plates to the cabinet and the hinge cups to the door. Re-adjust the hinge using the height, depth, and width adjustment screws until the door is properly aligned and closes flush with the cabinet frame.
Door rubs against the cabinet frame or adjacent doors.	Incorrect hinge adjustment (depth or width).	Adjust the depth and width screws on the hinges to create proper clearance between the door and the cabinet frame or other doors. Ensure the door is centered and has even gaps.
Hinge feels stiff or makes noise.	Accumulated dirt or minor misalignment.	Clean the hinge thoroughly as per the maintenance instructions. Check for any foreign objects obstructing the hinge mechanism. If the issue persists, verify alignment and adjustment. Avoid applying lubricants.

SPECIFICATIONS

- **Opening Angle:** 110 degrees
- **Material:** Steel, Nickel plated
- **Model Number:** 805.248.82
- **Manufacturer (for this listing):** Thankfulmama
- **Brand:** I-K-E-A
- **Mounting Type:** Door Mount / Snap-on
- **Package Quantity:** Typically sold in multi-packs (e.g., 12 Pack)
- **ASIN:** B09RW18TPL

WARRANTY AND SUPPORT

The I-K-E-A UTRUSTA Hinge is backed by a **25-year Limited Warranty**. This warranty covers defects in material and workmanship under normal use and service. For detailed terms and conditions, including coverage specifics

and exclusions, please refer to the official Limited Warranty brochure provided with your original purchase or available on the I-K-E-A website.

For further assistance, technical support, or to initiate a warranty claim, please contact I-K-E-A customer service through their official channels. When contacting support, please have your product model number (805.248.82) and proof of purchase readily available.