



# NOVOO NHM8D-141F Laptop Docking Station Dual Monitor 8 in 1 Usb C Hub Multiport Adapter User Manual

[Home](#) » [NOVOO](#) » NOVOO NHM8D-141F Laptop Docking Station Dual Monitor 8 in 1 Usb C Hub Multiport Adapter User Manual 



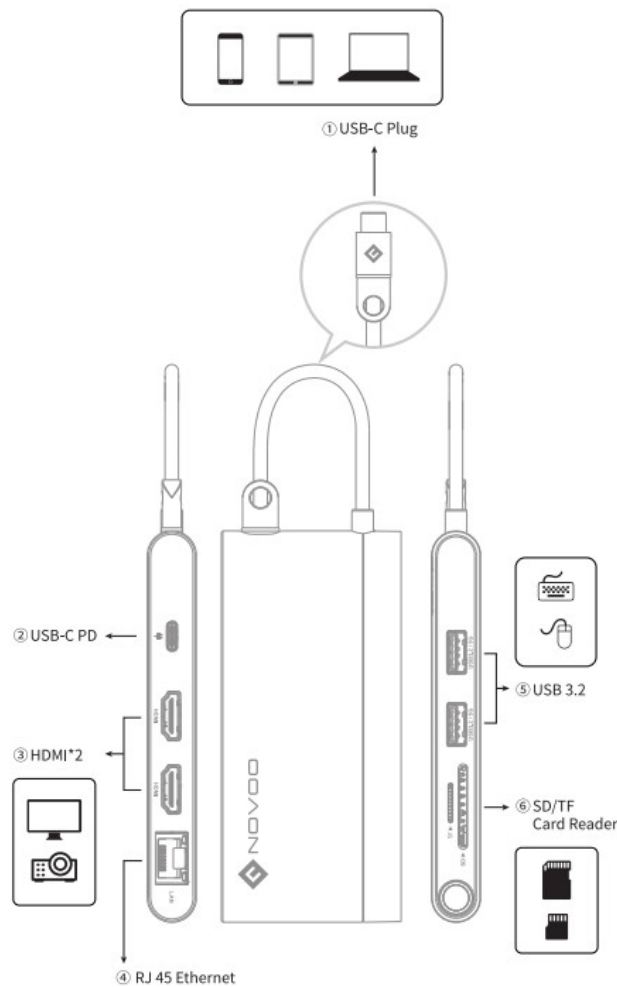
**HM8D-141F Laptop Docking Station Dual Monitor  
8 in 1 Usb C Hub Multiport Adapter  
User Manual**



## Contents

- 1 Instruction of product port
- 2 Specification
- 3 Graphics Setting for HDMI Output Mode (macOS & Windows)
- 4 FAQ
- 5 Attention
- 6 FCC STATEMENT
- 7 Documents / Resources
  - 7.1 References

## Instruction of product port



## Specification

1. USB-C (Male)
2. USB-C PD (Power Delivery) (Female): up to LOOW (20V/5A), 6W~11W power consumption
3. HDMI\*2: Single-port use supports 4K@60Hz resolution, compatible downward with 4K@30Hz/1080P/1080i/720P...etc.

### NOTE:

1 To use the HDMI ports, please ensure that the source port is Thunderbolt 3, Thunderbolt 4 or support DP Alt Mode.

2 For single-port use, If your laptop supports DP1.4 HBR3 DSC, the resolution will be 4K@60Hz;

If your laptop support DP1.4 HBR3 or DP1.2 HBR2, the resolution will be 4K@30Hz.

3 For dual-ports use,

If your laptop supports DP1.4 HBR3 DSC, the resolution will be 4K@60Hz+4K@30Hz;

If your laptop supports DP1.4 HBR3, the resolution will be 4K@30Hz+2560\* 1440@60Hz;

If your laptop only supports DP1.2 HBR2, the resolution will be 2\*1080P@60Hz.

- 4. RJ45: 10Mbps/100Mbps/1000Mbps
- 5. USB 3.2\*2: 5Gbps transmission speed
- 6. SD & TF Slots: V3.0 Card Reader, SD and TF can work at the same time


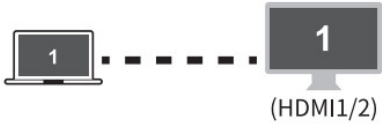




Operating Temperature: 0~70°C  
Operating Humidity: 10-90% RH  
Storage Temperature: -10 to +70°C  
Storage Humidity: 10% to 90% RH  
Weight: 114g  
Dimension: 120\*55\*15mm/ 4.72\*2.16\*0.59 inches  
Certification: CE, UKCA, FCC, ROHS  
Compatible with system: Windows, Mac OS, Android, Linux  
Warranty: 12 months

### Graphics Setting for HDMI Output Mode (macOS & Windows)





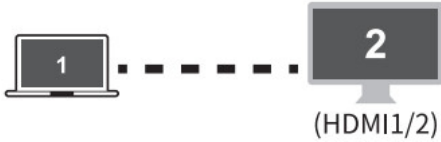

To achieve the 4K resolution, all the PC & external monitors & HDMI Cables must support 4K display output.

#### Mac OS

**Note:** Some options appear only when your Mac is connected to a display.  
(Reference: Mac OS User Guide)

	How to set?	Sample Graph
Mirror Mode	Apple menu  > System Preferences > Displays > Arrangement > Tick Mirror Displays > Mirror Mode	
		
Extend Mode	Apple menu  > System Preferences > Displays > Arrangement > Extend Mode (Do not tick Mirror Displays)	
		

#### Windows

	How to set?	Sample Graph
Mirror Mode	Setting > System > Display > Multiple Display (Press Win  and P > Project > Duplicate)	
		
Extend Mode	Setting > System > Display > Multiple Display (Press Win  and P> Project > Extend)	
		

## FAQ

Q1: Why there is no video output?

A1: Please make sure your USB-C source devices support video output (Support DP alt mode or Thunderbolt 3)  
 3) Please check the connection is well. Please use High speed HDMI cable by Certified HDMI adopter

Q2: Why there is no audio output from HDMI port?

A2: Please make sure that there is audio output function on the monitor. Please set the external monitor as default audio output device.

Q3: Sometimes WiFi stopped working while hard disk connected to hub, how to do?

A3: 2.4G network is easily disturbed. You can switch to 5G network, or you can adjust the placement of the hard disk, move to suitable place.

Q4: What to do if USB driver cannot be identified?

A4: Restart the computer and reconnect the product.

Q5: If display stopped after connect high current hard disk, how to do?

A5; Must be charged. Please supply by power adapter. Advice only connect one hard disk max.

Q6: When the computer is charged, the surface temperature of the product is high, it is normal?

A6: It is normal, but it is also in the range of the normal working temperature. After fully charged, the product will go back lower temperature.

## Attention


- The current output of the new MacBook is around 1.54. When the load exceeds 1.5A, the computer will start the self-protection function. Then prompt pop up(current overload), disable the prompt and restart your laptop. Connect the PD before plug in any other port. Please do not disconnect the PD when transferring data.
- Unplug the USB C hub, disable the i-Con, restart the laptop. Connect the wall charger (laptop' s charger) to the PO port then plug it into the laptop before using the other function.
- Connect the USB C Hub to the MacBook Pro/ Air via Type C PD port e gonnect ine HDMI to the projector/TV/ display via HDMI cable (Use a 4K HDMI cable to achieve a 4K display

## FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:  
This device may not cause harmful interference, and. (2) this device must accept any interference received, including interference that may cause undesired operation.



## Documents / Resources

	<a href="#">NOVOO NHM8D-141F Laptop Docking Station Dual Monitor 8 in 1 Usb C Hub Multiport Adapter</a> [pdf] User Manual NHM8D-141F Laptop Docking Station Dual Monitor 8 in 1 Usb C Hub Multiport Adapter, NHM8 D-141F, Laptop Docking Station Dual Monitor 8 in 1 Usb C Hub Multiport Adapter, Station Dual Monitor 8 in 1 Usb C Hub Multiport Adapter, Dual Monitor 8 in 1 Usb C Hub Multiport Adapter, Hub Multiport Adapter, Multiport Adapter, Adapter
---	--

## References

- [User Manual](#)