


**Nutbro**  
069022 5 Channel  
RGB Plus CCT  
LED RF Controller



# Nutbro 069022 5 Channel RGB Plus CCT LED RF Controller Instruction Manual


[Home](#) » [Nutbro](#) » Nutbro 069022 5 Channel RGB Plus CCT LED RF Controller Instruction Manual 

## Contents

- [1 Nutbro 069022 5 Channel RGB Plus CCT LED RF Controller](#)
- [2 Features](#)
- [3 Technical Parameters](#)
- [4 Mechanical Structures and Installations](#)
- [5 Malfunctions analysis & troubleshooting](#)
- [6 Documents / Resources](#)
  - [6.1 References](#)
- [7 Related Posts](#)

# Nutbro

## Nutbro 069022 5 Channel RGB Plus CCT LED RF Controller

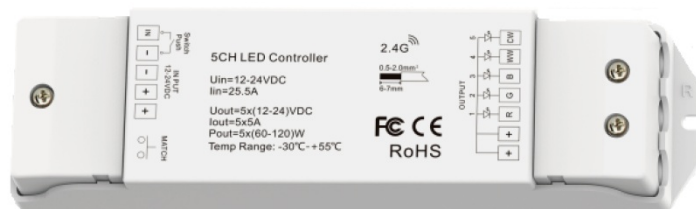

## Features

- Match with RF 2.4G single zone or multiple zone RGB+CCT remote control.
- One RF controller accept up to 10 remote control.
- 4096 levels 0-100% dimming smoothly without any flash.
- Built in 10 dynamic mode, include jump or gradual change style.
- Auto-transmitting function: Controller automatically transmit signal to another controller with 30m control

distance.

- Synchronize on multiple number of controllers.
- Light on/off fade time 3s selectable.
- Connect with external push switch to achieve on/off and 0-100% dimming function.

## Technical Parameters

Input and Output	
Input voltage	12-24VDC
Input current	25.5A
Output voltage	5 x (12-24)VDC
Output current	5CH,5A/CH
Output power	5 x (60-120)W
Output type	Constant voltage

Environment	
Operation temperature	Ta: -30 OC ~ +55 OC
Case temperature (Max.)	T c: +85OC
IP rating	IP20


Warranty and Protection	
Warranty	5 years
Protection	Reverse polarity Short circuit

Dimming data	
Input signal	RF 2.4GHz + Push Dim
Control distance	30m(Barrier-free space)
Dimming gray scale	4096 (2 <sup>12</sup> ) levels
Dimming range	0 -100%
Dimming curve	Logarithmic
PWM Frequency	1000Hz (default)


Safety and EMC	
EMC standard (EMC)	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-17 V3.2.4
Safety standard(LVD)	EN 62368-1:2020+A11:2020
Radio Equipment(RED)	ETSI EN 300 328 V2.2.2
Certification	CE,EMC,LVD,RED

Weight	
Net weight	0.116kg
Gross weight	0.150kg

## Mechanical Structures and Installations

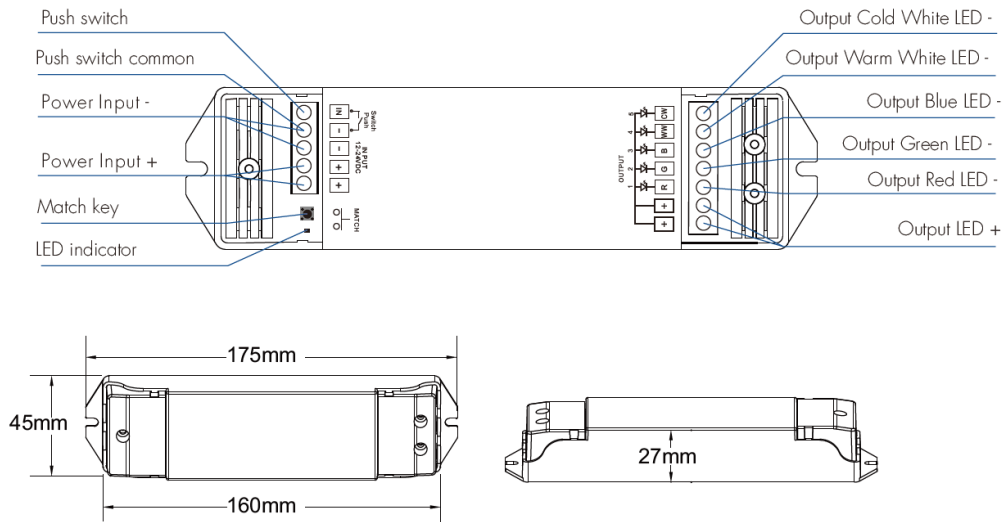

## Wiring Diagram

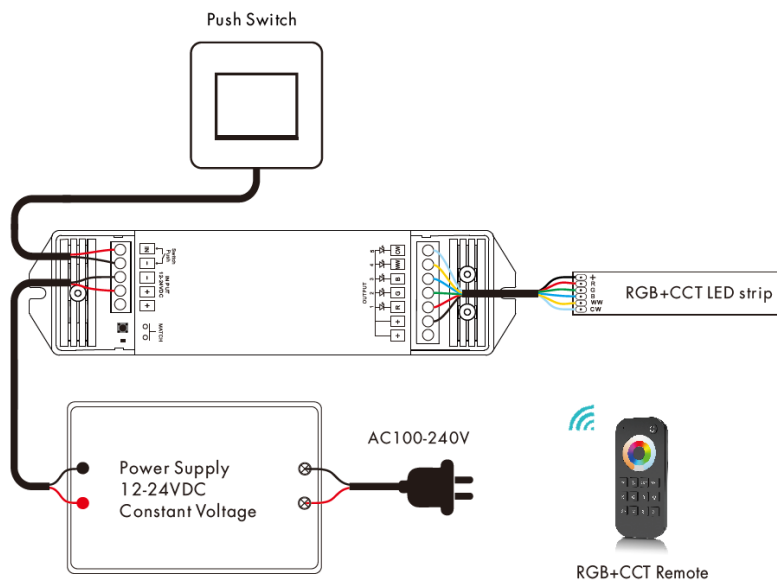

**Note:** Long press match key for 10s, RGB and CCT light can not be on at the same time. Long press match key for 15s, RGB and CCT light can be on at the same time. above operation will also restore the factory setting.

## Match Remote Control (two match ways)

End user can choose the suitable match/delete ways. Two options are offered for selection:

### Use the controller's Match key Match:

Short press match key, immediately press on/off key (single zone remote) or zone key (multiple zone remote) on the remote. The LED indicator fast flash a few times means match is successful.

### Delete:

Press and hold match key for 5s to delete all match, The LED indicator fast flash a few times means all matched remotes were deleted.

## Use Power Restart

### Match:

Switch off the power of the receiver, then switch on power. Repeat again. Immediately short press on/off key

(single zone remote) or zone key (multiple zone remote) 3 times on the remote. The light blinks 3 times means match is successful.

### Delete:

Switch off the power of the receiver, then switch on power. Repeat again. Immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 5 times on the remote. The light blinks 5 times means all matched remotes were deleted.

### Available remote controller



### Light on/off fade time

- Long press match key 5s, then short press match key 3 times, the light on/off time will be set to 3s, the indicator light blink 3 times.
- Long press match key 10s, restore factory default parameter, the light on/off time also restore to 0.5s.

### Push Dim

Click	ON/OFF
Double Click	Change from color mode to tunable white mode and vice-versa
Long press(>1s) from OFF	If on color mode change rotation speed; If on tunable white mode color temperature UP/DOWN (turn off and turn on to return dimming)
Long press(>1s) from ON	If on color mode start/stop color rotation; If on tunable white mode dimming UP/DOWN

Color rotation: 

### We can select 4 rotation speed:

- 10 flash/s means 6 seconds color rotation
- 5 flash/s means 30 seconds color rotation
- 2 flash/s means 1 minute color rotation
- 1 flash/s means 6 minutes color rotation

## Dynamic mode list

No.	Name	No.	Name
1	RGB jump	6	RGB fade in and out
2	RGB smooth	7	Red fade in and out
3	6 color jump	8	Green fade in and out
4	6 color smooth	9	Blue fade in and out
5	Color temperature smooth	10	White fade in and out

## Dual color control

- CH4=Warm white LED
- CH5=Cool white LED
- Each channel can supply up to 120W(@24V) and white balance can be controlled as such:

## Color temperature

- Cool white
- Neutral white
- Warm white


## Power distribution

- CH4=0W,CH5=120W
- CH4=120W,CH5=120W
- CH4=120W,CH5=0W


Linear dual color tuning



Dimming curve for CCT




Dimming curve for RGB



## Malfunctions analysis & troubleshooting

Malfunctions	Causes	Troubleshooting
No light	<ol style="list-style-type: none"> <li>1. No power.</li> <li>2. Wrong connection or insecure.</li> </ol>	<ol style="list-style-type: none"> <li>1. Check the power.</li> <li>2. Check the connection.</li> </ol>
Wrong color	<ol style="list-style-type: none"> <li>1. Wrong connection of R/G/B/WW/CW wires.</li> </ol>	<ol style="list-style-type: none"> <li>1. Reconnect R/G/B/WW/CW wires.</li> </ol>
Uneven intensity between front and rear, with voltage drop	<ol style="list-style-type: none"> <li>1. Output cable is too long.</li> <li>2. Wire diameter is too small.</li> <li>3. Overload beyond power supply capability.</li> <li>4. Overload beyond controller capability.</li> </ol>	<ol style="list-style-type: none"> <li>1. Reduce cable or loop supply.</li> <li>2. Change wider wire.</li> <li>3. Replace higher power supply.</li> <li>4. Add power repeater.</li> </ol>
No response from the remote	<ol style="list-style-type: none"> <li>1. The battery has no power.</li> <li>2. Beyond controllable distance.</li> <li>3. The controller did not match the remote.</li> </ol>	<ol style="list-style-type: none"> <li>1. Replace battery.</li> <li>2. Reduce remote distance.</li> <li>3. Re-match the remote.</li> </ol>

## Documents / Resources

	<a href="#">Nutbro 069022 5 Channel RGB Plus CCT LED RF Controller</a> [pdf] Instruction Manual 069022, dimLED PR RGB CCT 5x5A, 069022 5 Channel RGB Plus CCT LED RF Controller, 069022, 5 Channel RGB Plus CCT LED RF Controller, Plus CCT LED RF Controller, RF Controller, Controller
--	--

## References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.