

PLT 40076 Wattage Color Selectable Led Vapor Tight Fixture



# PLT 40076 Wattage Color Selectable Led Vapor Tight Fixture Installation Guide

[Home](#) » [PLT](#) » PLT 40076 Wattage Color Selectable Led Vapor Tight Fixture Installation Guide 

## Contents

- [1 PLT 40076 Wattage Color Selectable Led Vapor Tight Fixture](#)
- [2 Installation Instructions](#)
  - [2.1 Ring Mount](#)
  - [2.2 1/2" NPT Mount](#)
  - [2.3 Installation of DC Motion Sensor](#)
- [3 Documents / Resources](#)
  - [3.1 References](#)
- [4 Related Posts](#)



**PLT 40076 Wattage Color Selectable Led Vapor Tight Fixture**



## **WARNING**

- Installation, service, and maintenance of luminaries should be performed by a qualified licensed electrician.
- Read the installation instructions carefully before installation.

## **CAUTION**

- Do not use an electric generator to test this fixture.
- This luminaire must be installed in accordance with the National Electric Code and applicable local codes and ordinances.
- Use a strain relief bushing between the fixture and the outlet box when connecting power wires.
- In the event of smoke or fire, turn off the power immediately and call a licensed electrician.
- Before installing the sensor, make sure that the plastic cap is removed from the prongs.

## **Installation Instructions**

### **Ring Mount**

1. Screw the ring into the top of the fixture and tighten it (Figure 1 ).
2. Hang the fixture on the ceiling hook or chain (Figure 2).
3. Connect the two ground wires before connecting the two white neutral wires and the two black wires.



Figure 1

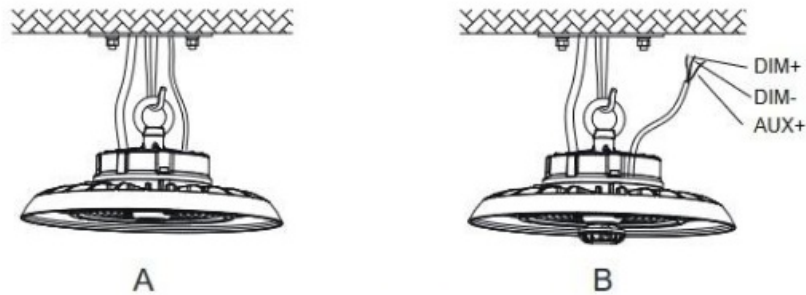


Figure 2

### Surface Mount

1. Using the bracket (purchased separately) as a guide, mark the mounting holes on the surface using a marker, then drill guide holes for the mounting screws (Figure 3).
2. Screw (by others) into the holes.
3. Align the bracket holes with the screw holes (Figure 4), and push the fixture to one side (Figure 5).
4. Connect the two ground wires before connecting the two white neutral wires and the two black wires. By adjusting the bracket screws, the fixture can be vertically adjusted 50° to the left or right (Figure 6).




Figure 3



Figure 4




Figure 5




Figure 6

### 1/2" NPT Mount

1. Unscrew the nuts on 1/2" NPT (by others) (Figure 7).
2. Insert 1/2" NPT stem into the bracket (purchased separately) hole (Figure 8).
3. Re-screw the nuts (Figure 9).
4. Connect the two ground wires together before connecting the two white neutral wires and the two black wires to

each other. By adjusting the bracket screws, the fixture can be vertically adjusted 50° to the left or right (Figure 10).




Figure 7

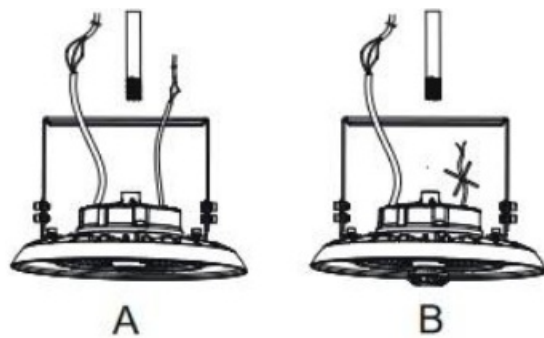


Figure 8




Figure 9




Figure 10

**Installation of DC Motion Sensor**

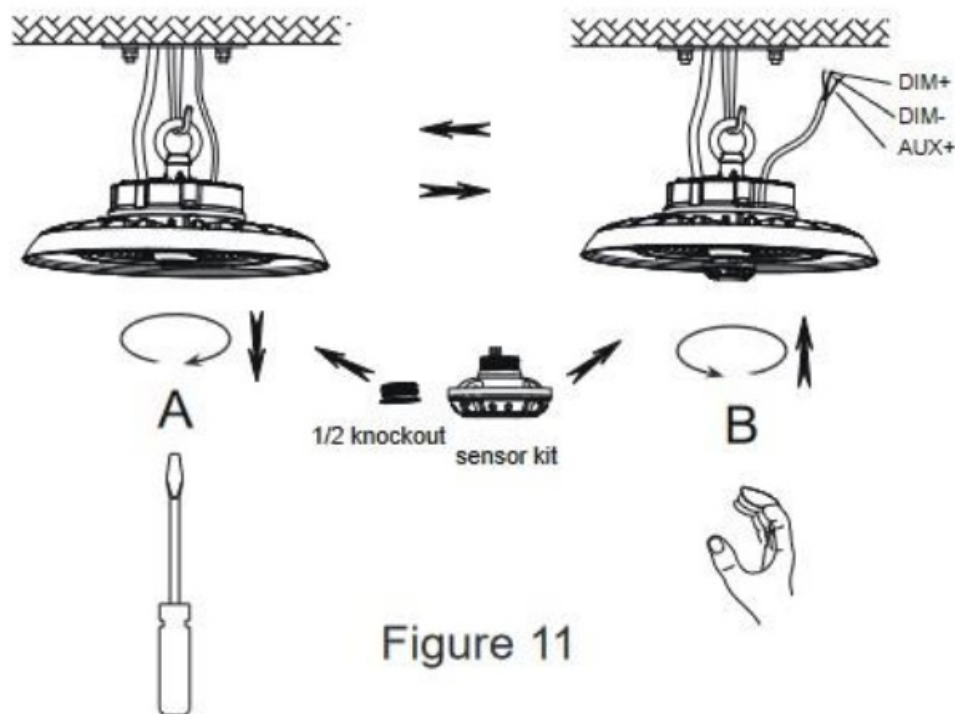


Figure 11


**WARNING**

- Before installing, servicing, or performing routine maintenance on this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts,

cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.

- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to the edges of sheet metal or other sharp objects.
- Do not install damaged products. Inspect the luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise that are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

## Documents / Resources

	<a href="#">PLT 40076 Wattage Color Selectable Led Vapor Tight Fixture</a> [pdf] Installation Guide 40076 Wattage Color Selectable Led Vapor Tight Fixture, 40076, Wattage Color Selectable Led Vapor Tight Fixture, Selectable Led Vapor Tight Fixture, Led Vapor Tight Fixture, Tight Fixture, Fixture
---	---

## References

- [User Manual](#)

[Manuals+](#). [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.