

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [X-PRO](#) /
- › [X-PRO Templar X 250cc 6 Speed Dirt Bike User Manual](#)

X-PRO DB-K11

X-PRO Templar X 250cc Dirt Bike User Manual

Model: DB-K11

1. INTRODUCTION

This user manual provides comprehensive instructions for the assembly, operation, maintenance, and troubleshooting of your X-PRO Templar X 250cc Dirt Bike. Please read this manual thoroughly before operating the motorcycle to ensure your safety and the longevity of the product. Proper assembly and maintenance are crucial for optimal performance and rider safety.

2. SAFETY INFORMATION

WARNING:

- Always wear appropriate safety gear, including a helmet, eye protection, gloves, and protective clothing.
- This motorcycle is intended for off-road use only. Do not operate on public roads.
- Never operate the motorcycle under the influence of alcohol or drugs.
- Ensure all fasteners are tightened to specifications before each ride.
- Full throttle is applied from standing/starting position, the front wheel of the motorcycle can raise up causing you to be thrown off the motorcycle resulting in serious injury or death.
- Not for use by individuals under the age of 16.

3. SETUP AND ASSEMBLY

Your X-PRO Templar X 250cc Dirt Bike requires some assembly upon arrival. The following steps, along with the official assembly video, will guide you through the process.

3.1. Unboxing and Initial Inspection

Carefully cut the straps and remove the cardboard packaging. Two individuals are recommended for safely lifting the motorcycle from its metal frame. Inspect all components for any signs of damage during transit.



Figure 3.1: X-PRO Templar X 250cc Dirt Bike as received in its shipping crate.

3.2. Front Wheel Installation

Remove the front wheel from its packaging. Ensure the spacers are correctly positioned on either side of the wheel hub. Align the wheel with the front forks and insert the axle. Secure the axle with the provided nuts and bolts.



Figure 3.2: Front wheel and brake assembly detail.

3.3. Handlebar and Controls Assembly

Attach the handlebar risers to the triple clamp using the provided bolts. Place the handlebar into the risers and secure it. Connect the brake and clutch levers, and ensure all control cables are routed correctly and have proper slack.

3.4. Fender and Side Panel Installation

Install the front fender to the front forks using the designated screws. Attach the side panels to the motorcycle frame, ensuring they snap securely into place and all mounting points are fastened.

3.5. Headlight and Turn Signal Connections

Connect the wiring for the headlight and front turn signals. Ensure all connectors are firmly seated. Mount the headlight assembly to the front fork brackets.

3.6. Battery Connection

Locate the battery compartment, typically under the seat. Connect the positive (red) terminal first, then the negative (black) terminal. Ensure connections are tight and secure.

3.7. Rear Rack Installation

If your model includes a rear rack, attach it to the designated mounting points on the rear subframe. Secure with bolts and ensure it is stable.

3.8. Mirror Installation

Thread the mirrors into their respective mounts on the handlebars. Tighten them securely, ensuring good visibility.

3.9. Final Checks

Before starting the motorcycle, double-check all bolts, nuts, and connections. Verify brake and throttle operation. Ensure tires are properly inflated.

3.10. Assembly Video Guide

For a detailed visual guide on the assembly process, please refer to the official X-PRO Templar X 250cc Dirt Bike Assembly Video below:

Your browser does not support the video tag.

Official X-PRO Templar X 250cc Dirt Bike Assembly Video (Duration: 18 minutes, 53 seconds). This video provides step-by-step instructions for unboxing, assembling components, and performing initial checks.

4. OPERATING INSTRUCTIONS

4.1. Starting the Engine

Ensure the fuel valve is open and the ignition key is turned to the 'ON' position. For cold starts, use the choke. Kick-start the engine firmly. Once started, allow the engine to warm up before riding.

4.2. Gear Shifting

The X-PRO Templar X 250cc features a 6-speed manual transmission. Shift gears smoothly using the clutch and gear lever. Practice shifting in a safe, open area before riding at higher speeds.

4.3. Braking

The motorcycle is equipped with disc brakes. Apply both front and rear brakes smoothly and progressively. Avoid sudden, hard braking, especially on loose surfaces, to prevent loss of control.

4.4. Digital Display Panel

The digital display panel provides essential information such as speed, RPM, battery voltage, and odometer readings. Familiarize yourself with the display before riding.



Figure 4.1: Digital display panel showing speed, RPM, and battery voltage.

5. MAINTENANCE

Regular maintenance is essential for the safe and reliable operation of your X-PRO Templar X 250cc Dirt Bike.

5.1. Pre-Ride Checks

- Check tire pressure and condition.
- Inspect brake fluid levels and brake pad wear.
- Lubricate and adjust the drive chain.
- Verify all lights and signals are functioning correctly.

5.2. Engine Oil

Regularly check and change the engine oil according to the maintenance schedule. Use recommended oil for the 249.9cc Zongshen engine to ensure optimal performance and longevity.

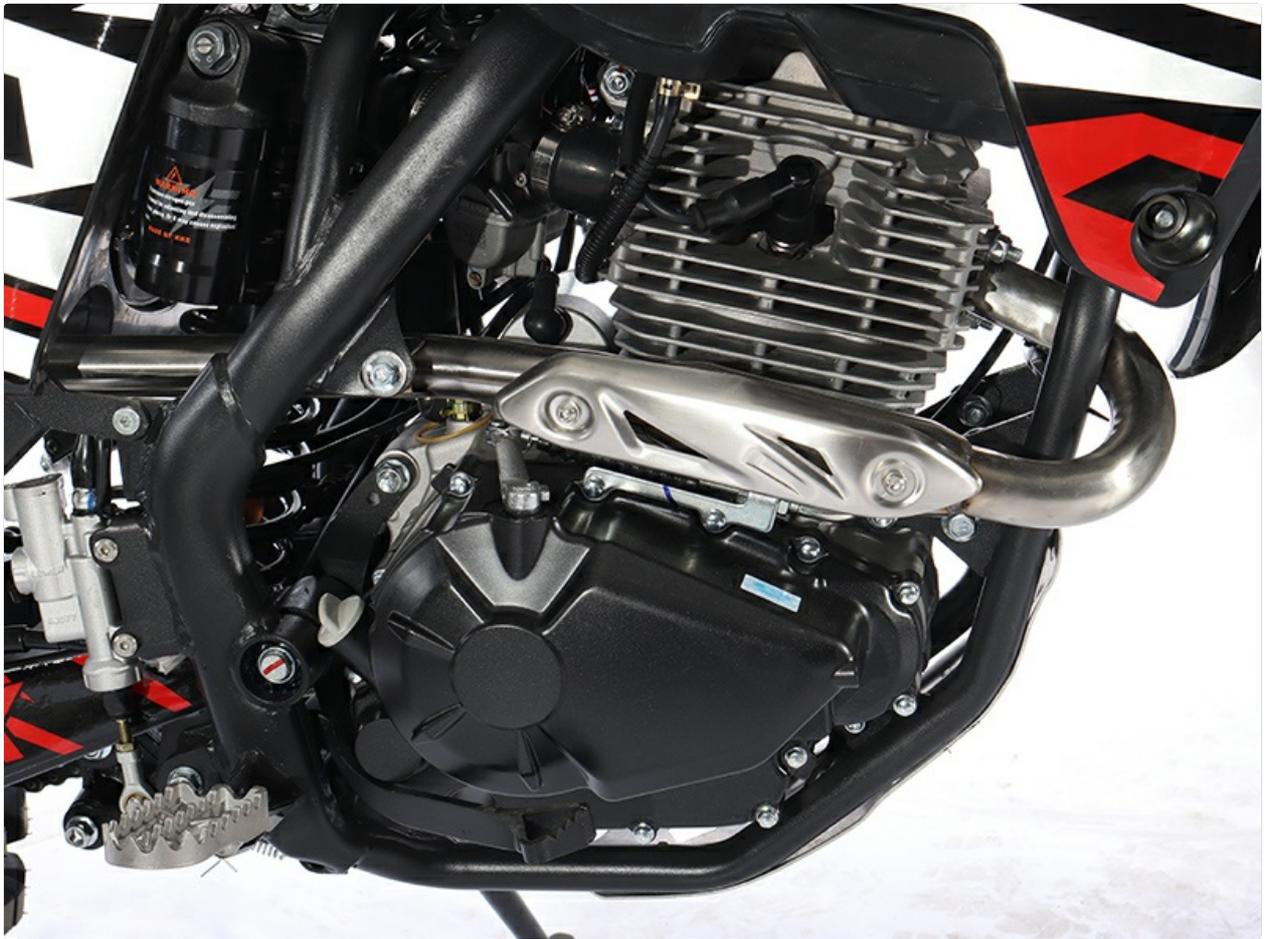


Figure 5.1: The 249.9cc Zongshen engine.

5.3. Suspension Adjustment

The front and rear shock absorbers are adjustable for softness or hardness. Adjust the suspension settings to suit your riding style and terrain for improved stability and comfort.



Figure 5.2: Adjustable shock absorber for customized ride comfort.

6. TROUBLESHOOTING

6.1. Common Issues

- **Engine not starting:** Check fuel level, spark plug, and battery connections.
- **Fuel leaks:** Inspect fuel lines and carburetor for loose connections or damage.
- **Speedometer not working:** Verify the speedometer sensor and wiring connections.

7. SPECIFICATIONS

Specification	Detail
Bike Type	Dirt Bike
Age Range (Description)	Adult
Brand	X-PRO
Number of Speeds	6
Color	Black
Wheel Size	21 Inches (Front) / 18 Inches (Rear)
Frame Material	Alloy Steel, Aluminum
Suspension Type	Dual, Front, Rear
Item Weight	258 Pounds
Model Name	DB-K11
Power Source	Gasoline
Assembly Required	Yes

8. WARRANTY AND SUPPORT

X-PRO stands behind its products and is dedicated to resolving issues until you are completely satisfied. For warranty information, parts, service, or advice, please contact XPROUSA directly. Their knowledgeable team provides hassle-free experience and maintains a stock of parts for most vehicles they sell.