

[Manuals.plus](#) /

› [Deco Gear](#) /

› Deco Gear 39" Curved Ultrawide Gaming Monitor User Manual

Deco Gear VIEW390

Deco Gear 39" Curved Ultrawide Gaming Monitor User Manual

Model: VIEW390

Brand: Deco Gear

INTRODUCTION

This manual provides comprehensive instructions for the setup, operation, maintenance, and troubleshooting of your Deco Gear 39" Curved Ultrawide Gaming Monitor. Designed for an immersive experience, this monitor combines high refresh rates, rapid response times, and vibrant color reproduction to enhance both productivity and entertainment.



Image: The Deco Gear 39" Curved Ultrawide Gaming Monitor, showcasing its sleek design and immersive display.

PACKAGE CONTENTS

Please verify that all items listed below are included in your package:

- Deco Gear 39" Curved Ultrawide Gaming Monitor
- DP Cable
- USB-C Cable
- Power Adapter
- Monitor Stand Components (Base and Neck)
- User Manual (this document)

SETUP

1. Assembling the Stand

1. Carefully remove the monitor and stand components from the packaging.
2. Attach the stand neck to the monitor panel. Ensure it clicks securely into place or is fastened with the provided screws.
3. Connect the stand base to the stand neck, tightening any screws as necessary.
4. Place the assembled monitor on a stable, flat surface.



Image: Illustration of monitor stand assembly and VESA mounting options.

2. Connecting to a Device

The monitor supports multiple input options. Choose the appropriate cable for your device:

- **HDMI:** Connect an HDMI cable from your computer's graphics card to the monitor's HDMI port. Supports up to 144Hz refresh rate.
- **DisplayPort (DP):** Connect a DisplayPort cable from your computer's graphics card to the monitor's DP port. Supports up to 165Hz refresh rate.
- **USB-C:** Connect a USB-C cable for video, data, and power delivery (up to 65W) with compatible devices.

Ensure the power adapter is connected to the monitor and a power outlet.

Connect Without Limits

HDMI 2.0 · DisplayPort 1.4 · USB-C with 65W Power Delivery



Image: Close-up view of the monitor's rear input ports, highlighting HDMI, DisplayPort, and USB-C connections.

OPERATING INSTRUCTIONS

Power On/Off

Press the power button, usually located on the back or bottom of the monitor, to turn it on or off. The power indicator light will illuminate when the monitor is active.

On-Screen Display (OSD) Menu Navigation

The OSD menu allows you to adjust various monitor settings. Access it using the joystick or buttons typically found on the back or bottom of the monitor.

- **Input Source:** Select between HDMI, DisplayPort, or USB-C inputs.
- **Picture Settings:** Adjust brightness, contrast, sharpness, and color temperature.
- **Display Settings:** Configure aspect ratio, HDR mode, and Adaptive Sync.
- **Audio:** Adjust volume for connected headphones/speakers via the audio out port.

Key Features and Adjustments

Curved Display (3000R)

The 3000R curvature provides an immersive viewing experience, reducing eye strain and enhancing peripheral vision, especially beneficial for gaming and wide content viewing.



Image: The monitor showcasing its expansive 3000R curvature with a dynamic visual.

High Refresh Rate (165Hz) and Fast Response Time (1ms MPRT)

Experience ultra-smooth motion and minimal ghosting, crucial for fast-paced gaming. The 165Hz refresh rate ensures fluid frame transitions, while the 1ms MPRT (Moving Picture Response Time) minimizes blur.

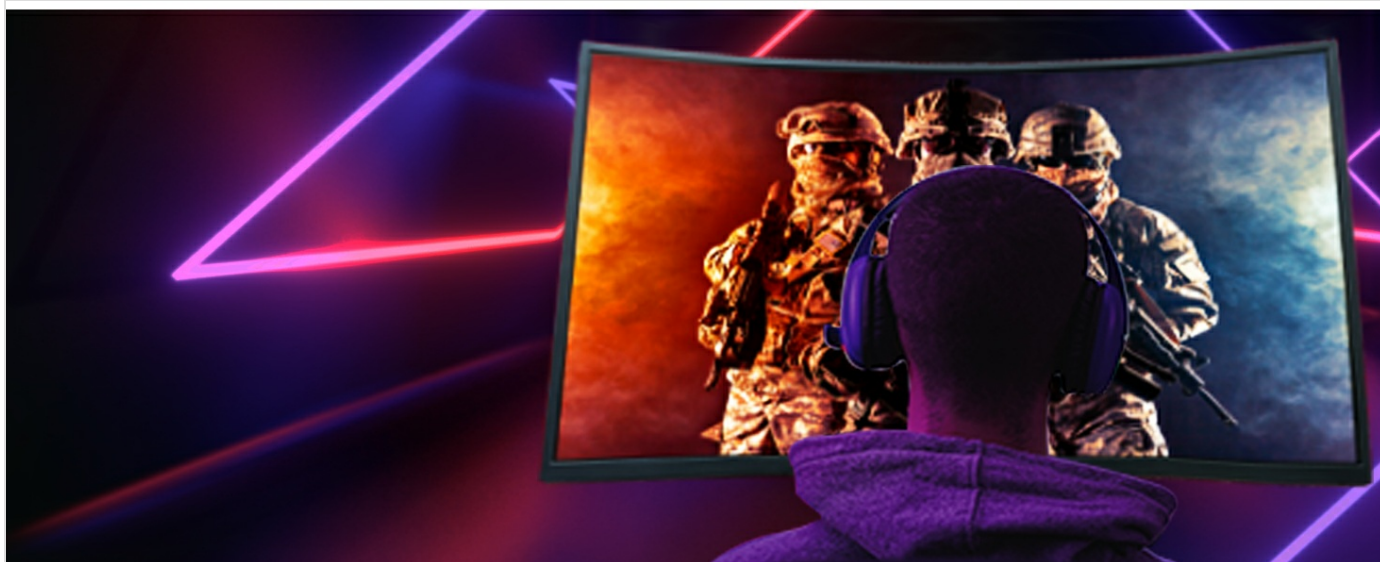


Image: A visual comparison demonstrating the smoothness of 165Hz refresh rate versus 60Hz.

Vibrant and Accurate Colors

With 16.7 million colors, 99% sRGB color reproduction accuracy, and HDR400 support, the monitor delivers rich, true-to-life visuals. The 4000:1 contrast ratio ensures deep blacks and bright whites.

True-to-Life Visuals

HDR400 · 4000:1 Contrast Ratio · 99% sRGB Color Accuracy



Image: The monitor showcasing its vibrant and accurate color display with a burst of colors.

Adaptive Sync Technology

Adaptive Sync synchronizes the monitor's refresh rate with your graphics card's frame rate, eliminating screen tearing and stuttering for a smoother gaming experience. Enable this feature through the OSD menu.

Adjustable Tilt

The monitor stand allows for tilt adjustment (-5° to +15°) to help you find the most comfortable viewing angle and reduce glare.

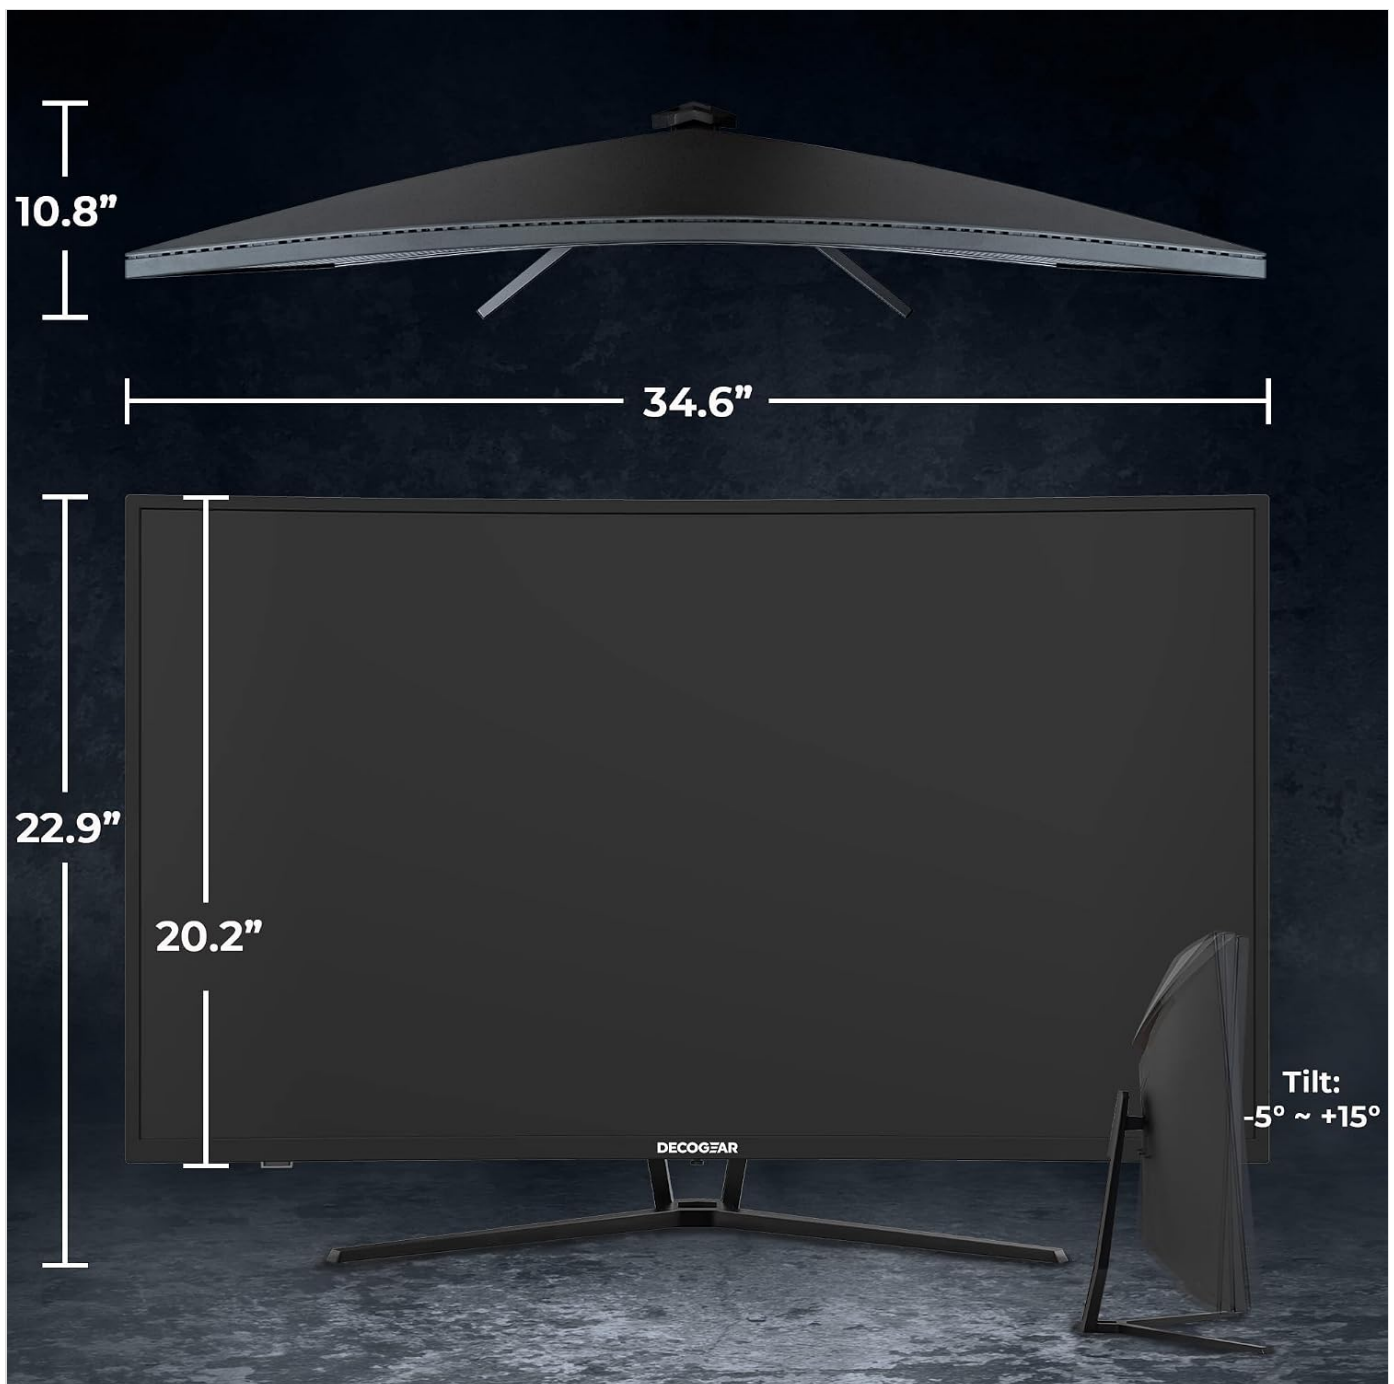


Image: Diagram illustrating the monitor's dimensions and its adjustable tilt range.

MAINTENANCE

Cleaning the Monitor

- Always power off the monitor and unplug it from the power outlet before cleaning.
- Use a soft, lint-free cloth lightly dampened with water or a non-abrasive screen cleaner.
- Gently wipe the screen and exterior surfaces. Avoid spraying liquid directly onto the screen or into any openings.
- Do not use alcohol, ammonia, or abrasive cleaners, as these can damage the screen surface.

General Care

- Avoid placing heavy objects on the monitor or its cables.
- Keep the monitor away from direct sunlight, heat sources, and excessive moisture.
- Ensure proper ventilation around the monitor to prevent overheating.

TROUBLESHOOTING

Problem	Possible Cause	Solution
No image on screen	Monitor is off; Incorrect input source; Loose cable connection.	Ensure monitor is powered on. Select correct input source via OSD. Check all video and power cables are securely connected.
Image is blurry or distorted	Incorrect resolution; Graphics card driver issues; Cable quality.	Set display resolution to 2560x1440. Update graphics card drivers. Try a different, high-quality cable.
No sound from audio out	Volume too low; Incorrect audio output selected on PC; Cable issue.	Increase monitor volume via OSD. Ensure monitor is selected as audio output device in PC settings. Check audio cable connection.
Screen tearing or stuttering	Adaptive Sync not enabled; Graphics card not compatible or drivers outdated.	Enable Adaptive Sync in the monitor's OSD menu and your graphics card control panel. Ensure graphics card drivers are up to date.

SPECIFICATIONS

Feature	Detail
Model Number	VIEW390
Screen Size	39 Inches
Resolution	2560 x 1440 Pixels (QHD Ultra Wide 1440p)
Aspect Ratio	16:9
Curvature	3000R
Refresh Rate	165 Hz (DisplayPort), 144 Hz (HDMI)
Response Time	1ms MPRT
Contrast Ratio	4000:1
Image Brightness	350 Candela
Color Support	16.7 Million Colors, 99% sRGB
HDR Support	HDR400
Connectivity	1 x HDMI 2.0, 1 x DisplayPort 1.4, 1 x USB-C (with 65W Power Delivery), Audio Out
VESA Mount Compatible	Yes (100x100mm)
Product Dimensions (L x W x H)	34.6 x 10.8 x 22.9 inches
Item Weight	25.6 pounds

WARRANTY AND SUPPORT

For detailed warranty information, please refer to the warranty card included with your product or visit the official Deco

Gear website. If you encounter any issues not covered in this manual or require technical assistance, please contact Deco Gear customer support.
Contact information can typically be found on the manufacturer's website or on the product packaging.

© 2024 Deco Gear. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question