



ProtoArc XKM03 Foldable Multi Device Keyboard and Mouse Combo User Manual

[Home](#) » [ProtoArc](#) » ProtoArc XKM03 Foldable Multi Device Keyboard and Mouse Combo User Manual 

Contents

- [1 ProtoArc XKM03 Foldable Multi Device Keyboard and Mouse Combo](#)
- [2 Product Usage Instructions](#)
- [3 Product Features](#)
- [4 Keyboard Bluetooth Connection](#)
- [5 Mouse Bluetooth Connection](#)
- [6 Charging Guide](#)
- [7 Multimedia Function Keys](#)
- [8 Product Parameters](#)
- [9 Packing List](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)
- [11 Related Posts](#)

ProtoArc 

ProtoArc XKM03 Foldable Multi Device Keyboard and Mouse Combo



Product Specifications

Mouse:

- DPI: 800-1200(default)-1600-2400
- Polling Rate: 250 Hz
- Movement Detection: Optical
- Battery Capacity: 300mAh
- Working Voltage: 3.7V
- Working Current: 4.1mA
- Standby Current: 1.5mA
- Sleeping Current: 0.3mA
- Standby Time: 30 Days
- Working Time: 75 Hours
- Charging Time: 2 Hours
- Wake Up Way: Press any button
- Size: 113.3×72.1×41.8mm

Keyboard:

- Battery Capacity: 250mAh
- Working Voltage: 3.7V
- Working Current: 2mA
- Standby Current: 1mA
- Sleeping Current: 0.3mA
- Standby Time: 30 Days
- Working Time: 130 Hours

- Charging Time: 2 Hours
- Wake Up Way: Press any button
- Size (Unfolded): 392.6×142.9×6.4mm
- Size (Folded): 195.3×142.9×12.8mm

Product Usage Instructions

Keyboard Bluetooth Connection

1. Unfold the keyboard.
2. Shortly press Fn + // to choose the channel; Long press Fn + // , the white indicator flash quickly, and the keyboard enters into pairing mode.
3. Turn on the Bluetooth settings on your device, search or select ProtoArc XKM03 and start Bluetooth pairing until the connection is completed.

Mouse Bluetooth Connection

1. Turn on the power switch to ON.
2. Press the channel switch button to 1 / 2 / 3 Bluetooth channel and the white light flash slowly.
3. Press and hold the channel switch button for 3~5 seconds until the white light flashes quickly, and the mouse enters the Bluetooth pairing mode.

Switching Between Three Devices

After connecting to three devices, press Fn + // to switch between the devices.

Charging Guide

Use the Type-C Charging Cord to charge the device when needed.

Multimedia Function Keys

Note: Simultaneously press Fn + corresponding keys to achieve multimedia functions.

Frequently Asked Questions (FAQ)

1. How do I charge the keyboard and mouse combo?

To charge the device, use the provided Type-C Charging Cord.

2. How can I switch between different devices connected to the keyboard and mouse combo?

To switch between devices, press Fn + // keys as instructed in the manual.

3. What are the multimedia function keys used for?

The multimedia function keys provide shortcuts for various functions like adjusting volume, controlling media playback, and more when used with the corresponding key combinations.


XKM03


User Manual

Foldable Multi-Device Keyboard and Mouse Combo

support@protoarc.com

Product Features

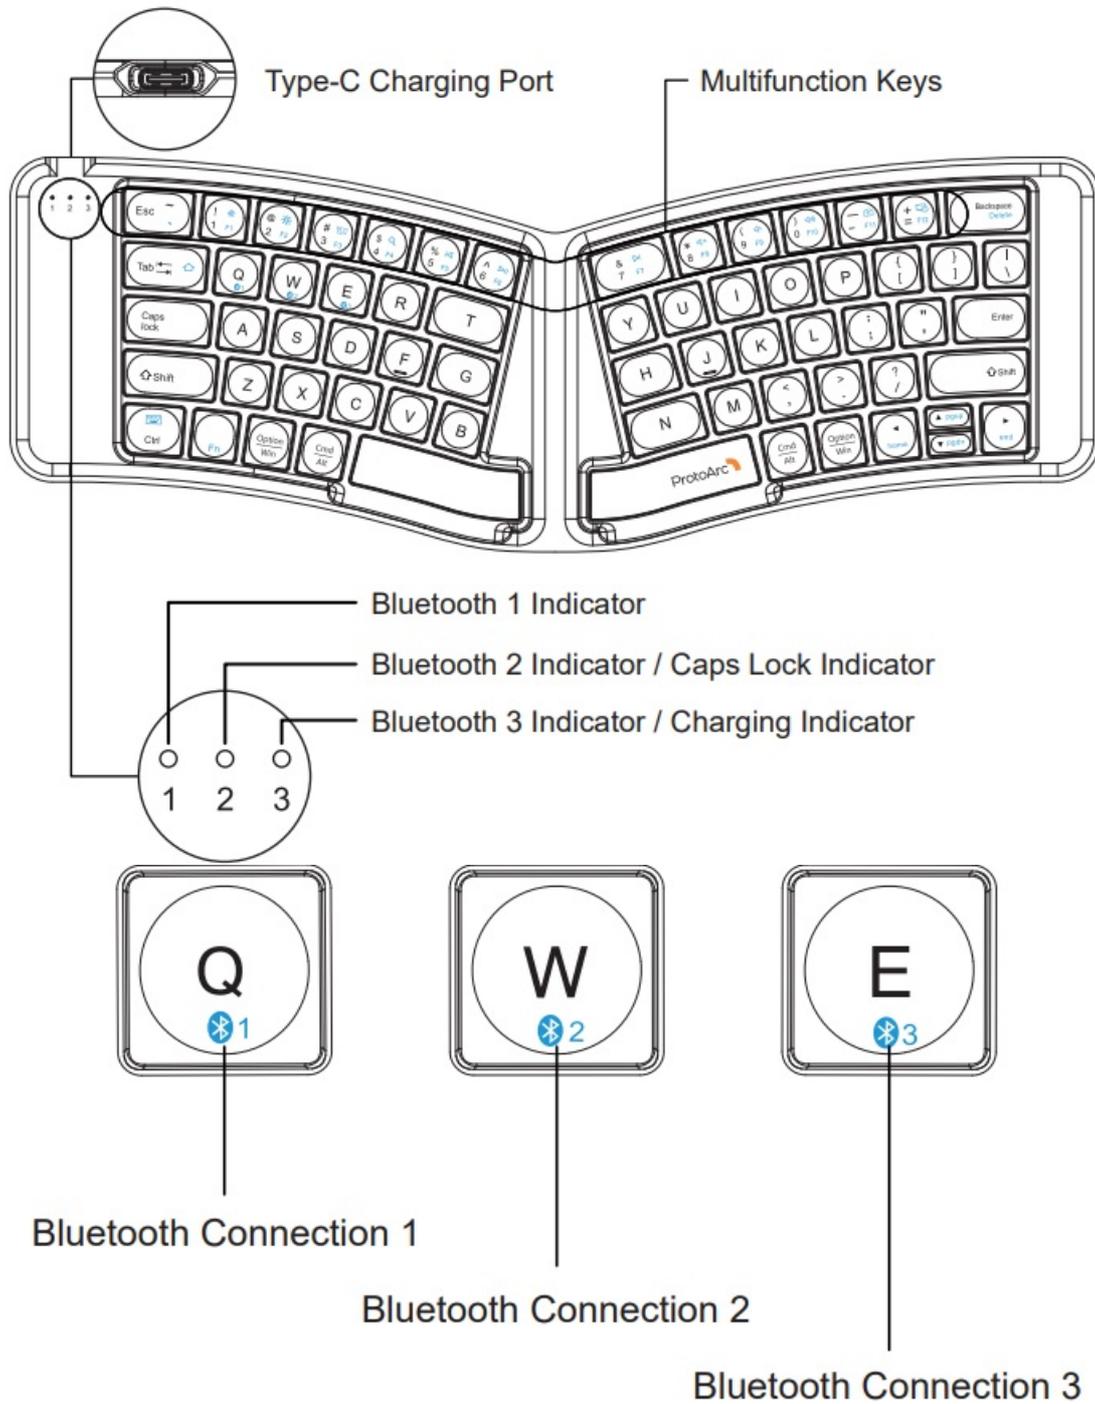

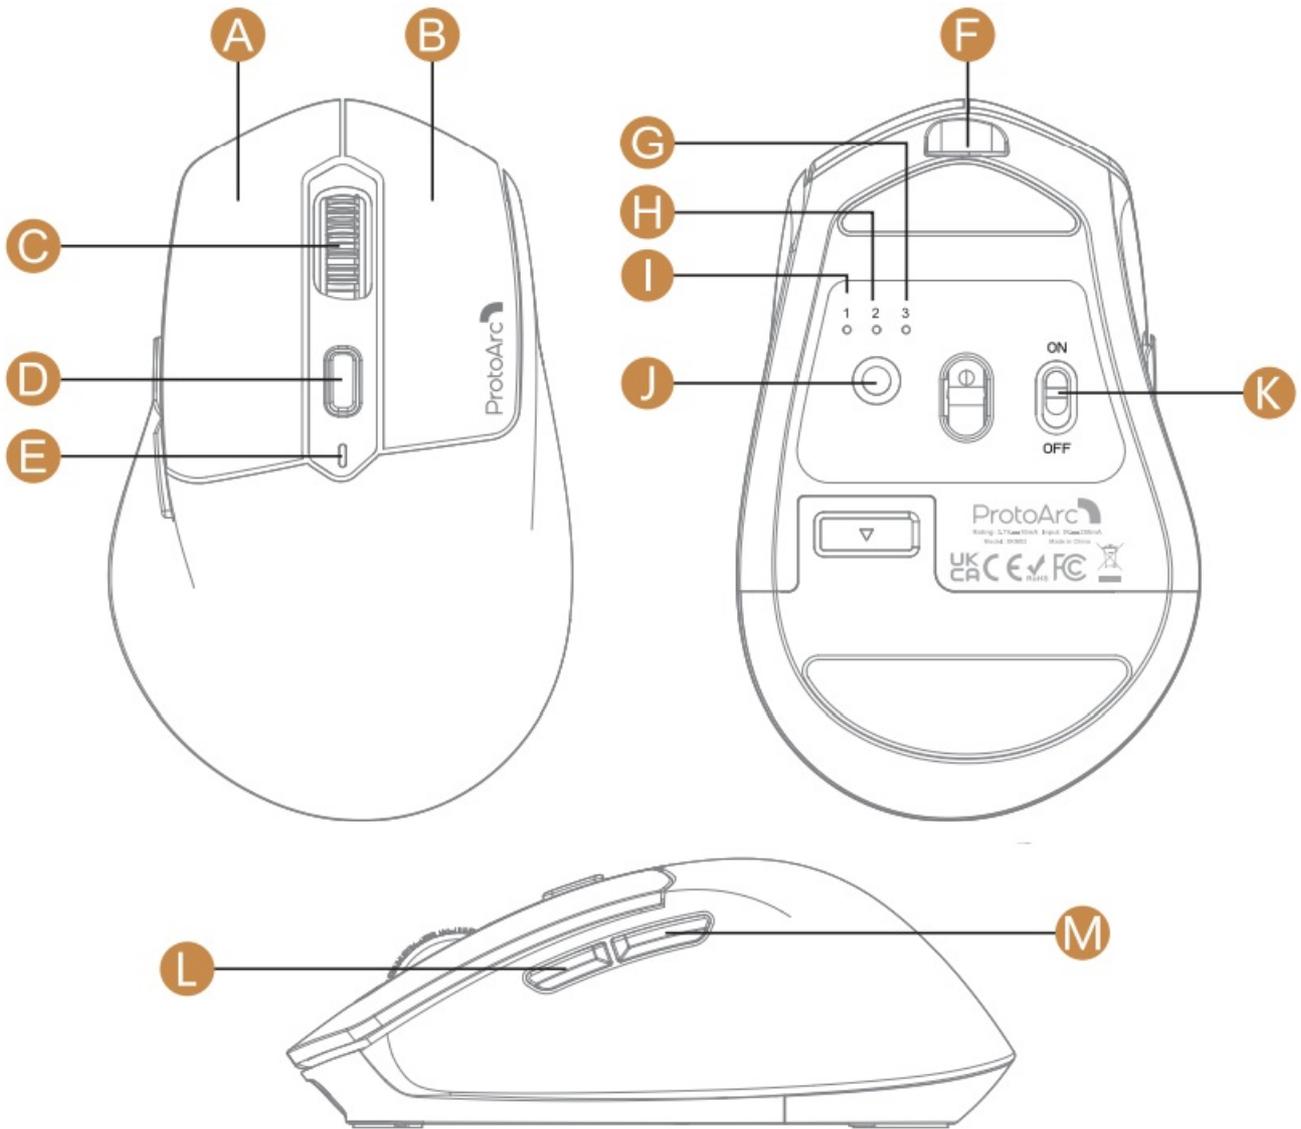

- A Left Button
- B Scroll Wheel
- C Low Battery / Charging Indicator
- D Bluetooth 3 Indicator
- E Bluetooth 1 Indicator
- F Power Switch
- G Backward Button
- H Right Button
- I DPI Button
- J TYPE-C Charging Port
- K Bluetooth 2 Indicator
- L Channel Switch Button
- M Forward Button


Keyboard Bluetooth Connection

1




1. Unfold the keyboard.

2

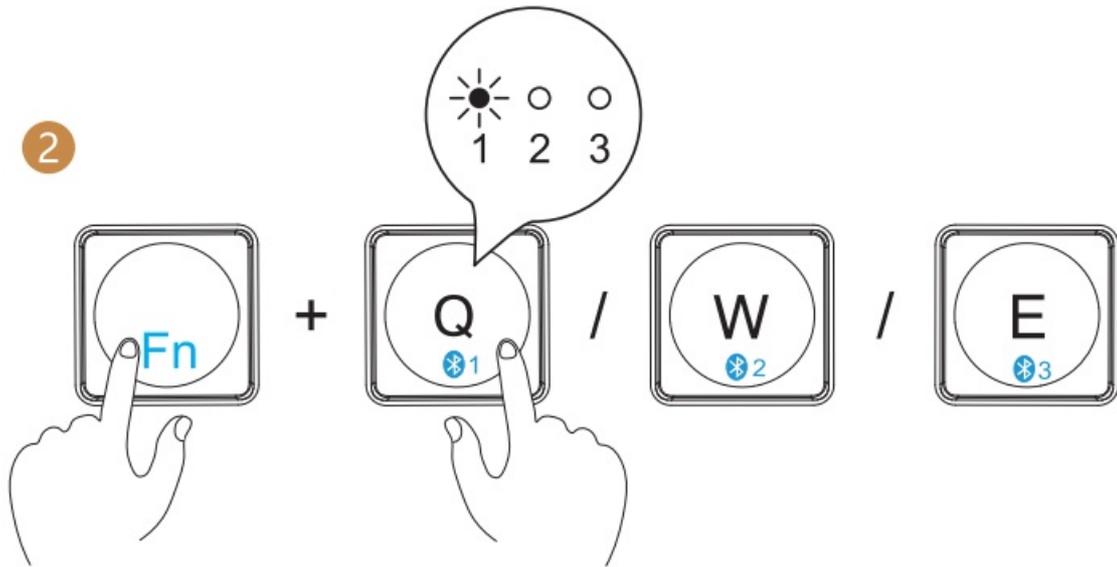


2. Shortly press “Fn” + “ /  / ” to choose the channel; Long press “Fn” + “ /  / ”, the white indicator flash quickly, and the keyboard enters into pairing mode.

3

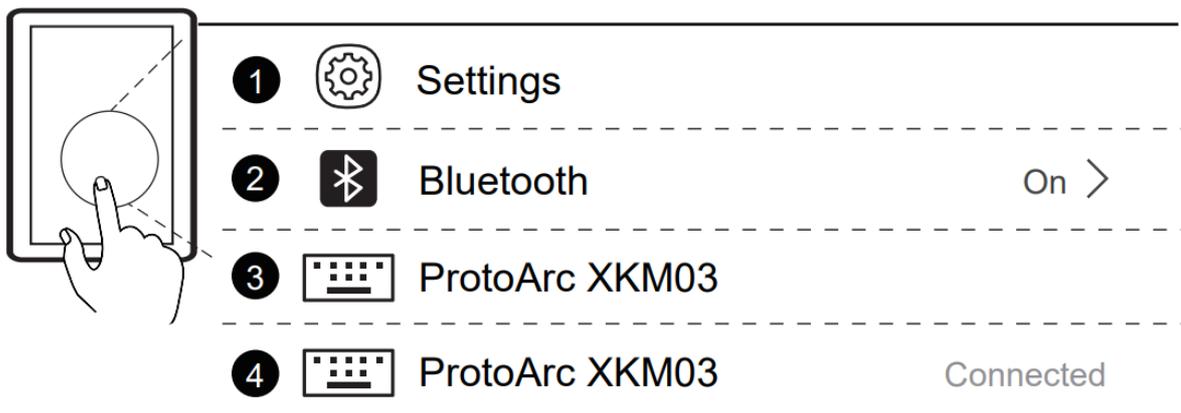


3. Turn on the Bluetooth settings on your device, search or select “ProtoArc XKM03” and start Bluetooth pairing until the connection is completed.

Mouse Bluetooth Connection

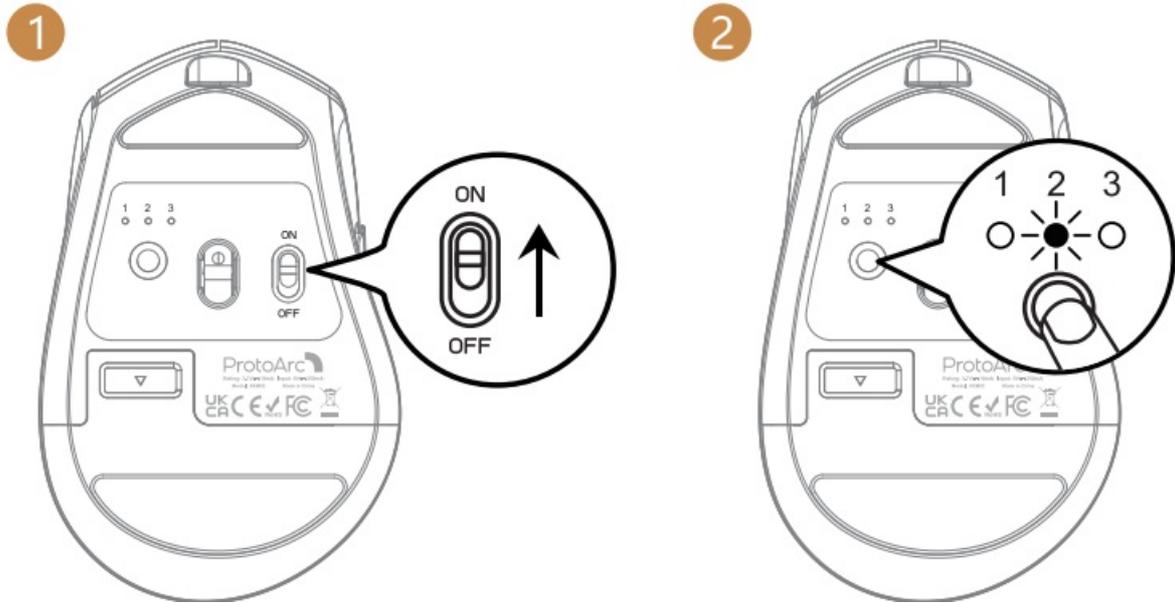

1. Turn on the power switch to ON.
2. Press the channel switch button to 1 / 2 / 3 Bluetooth channel and the white light flash slowly. Press and hold the channel switch button for 3~5 seconds until the white light flashes quickly, and the mouse enters the Bluetooth pairing mode.

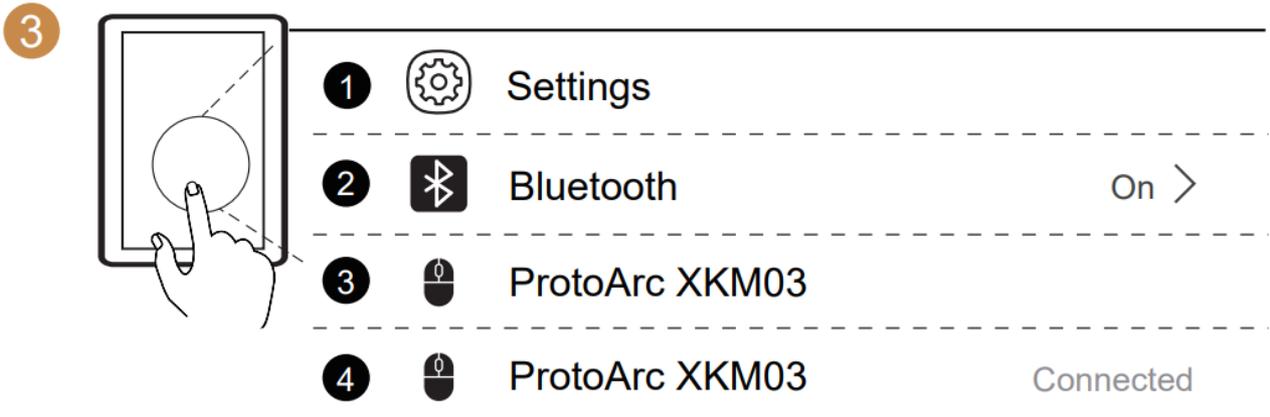


3. Turn on the Bluetooth settings on your device, search or select “ProtoArc XKM03” and start Bluetooth pairing until the connection is completed.

How to Switch Between Three Devices


- After getting connected to three devices, you can easily switch the connection by pressing “Fn” + “//”.

BT2 Device Connection

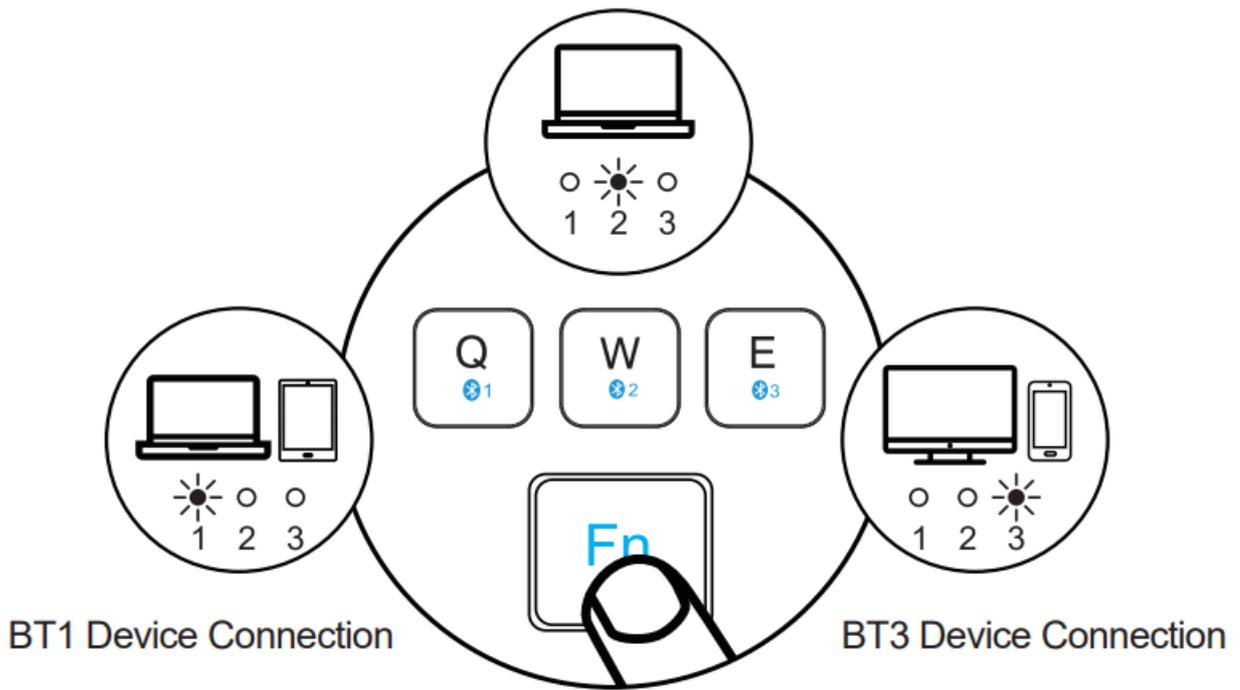

- After BT1, BT2 and BT3 channel is connected, press the channel switch button on the bottom of the mouse to switch between multiple devices.


BT2 Device Connection

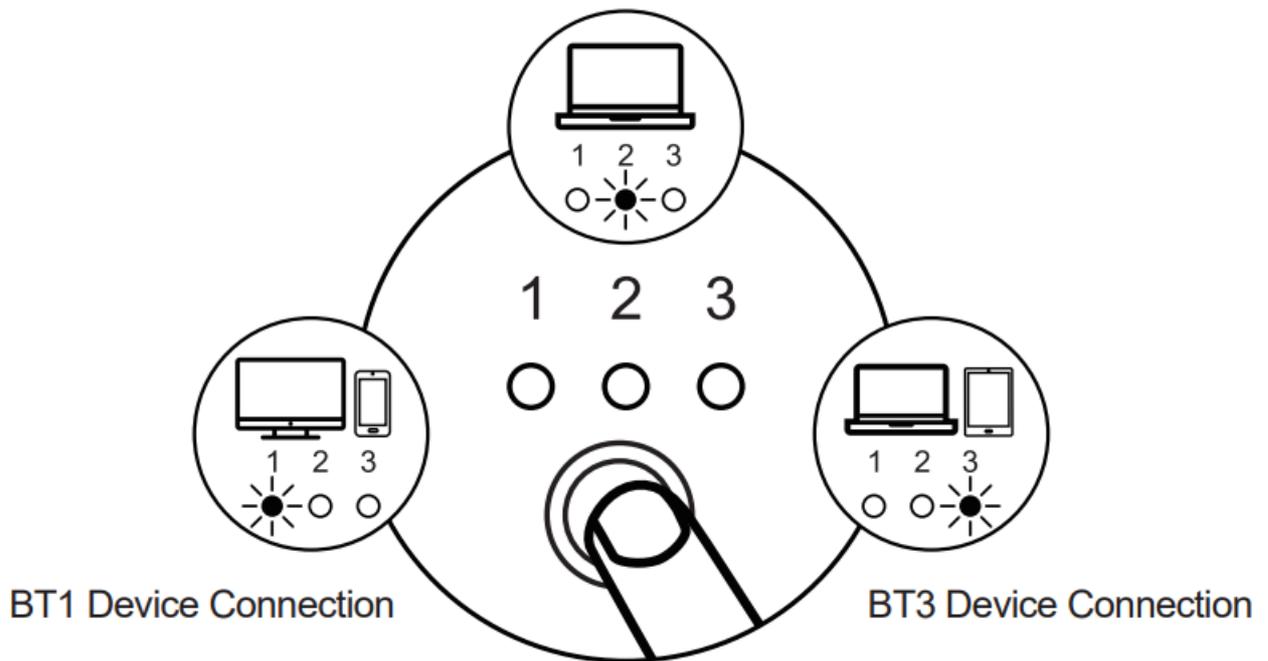

Charging Guide



Type C Charging Cord

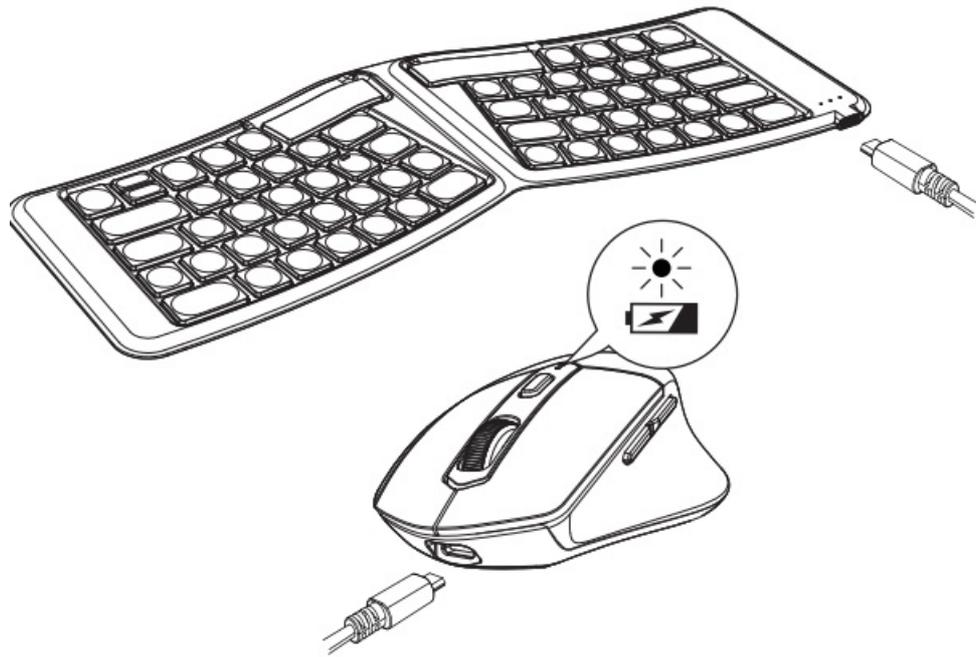

- When the power of the keyboard and mouse is low, there will be a delay or lag, which will affect normal use. Please use the Type-C charging cable to charge the keyboard and mouse in time to function properly.
- **Keyboard:**
When low battery, the indicator light on the channel in use will flash until the keyboard is turned off. The charging indicator will stay on red when charging, and turn green once the keyboard is fully charged.
- **Mouse:**
When low battery, the charging indicator will flash red. When charging, the indicator stays red and turn green once the mouse is fully charged.

Multimedia Function Keys

FN+“Keys”	Windows	Android/iOS/ Mac OS	FN+Shfit+ “Keys”	Windows/ Mac OS
	Home Page	Home Page		F1
	Light -	Light -		F2
	Light +	Light +		F3
	Application Window Switch	Application Window Switch		F4
	Search	Search		F5
	Previous	Previous		F6
	Play/Pause	Play/Pause		F7
	Next Track	Next Track		F8
	Mute	Mute		F9
	Volume -	Volume -		F10
	Volume +	Volume +		F11
	Screenshot	Screenshot		F12
	Lock Screen	Lock Screen	/	/
	/	Virtual Keyboard	/	/

Note: Simultaneously press “Fn” + corresponding keys to achieve multimedia functions.

Product Parameters

Mouse:

DPI	800-1200(default)-1600-2400
Polling Rate	250 Hz
Movement Detection	Optical
Battery Capacity	300mAh
Working Voltage	3.7V
Working Current	≤4.1mA
Standby Current	≤1.5mA
Sleeping Current	≤0.3mA
Standby Time	30 Days
Working Time	75 Hours
Charging Time	≤2 Hours
Wake Up Way	Press any button
Size	113.3×72.1×41.8mm

Keyboard:

Battery Capacity	250mAh
Working Voltage	3.7V
Working Current	≤2mA
Standby Current	≤1mA
Sleeping Current	≤0.3mA
Standby Time	30 Days
Working Time	130 Hours
Charging Time	≤2 Hours
Wake Up Way	Press any button
Size	392.6×142.9×6.4mm(Unfolded) 195.3×142.9×12.8mm(Folded)

Warm Reminder

1. If the keyboard fails to connect, it is recommended to fold the keyboard to turn it off, open the device's Bluetooth list, delete the keyboard Bluetooth then unfold the keyboard and restart the device to reconnect.
2. Press "Fn" + "BT1/BT2/BT3" to switch to corresponding Bluetooth channels, it can use normally in 3 seconds.
3. The keyboard has a memory function. When a normally connected device is turned off and powered on again, the keyboard will default to connect this device through original channel, and the channel indicator will be on.

Sleep Mode

1. When the keyboard and mouse is not used for more than 60 minutes, it will automatically enter into sleep mode and the indicator light will turn off.
2. When using the keyboard and mouse again, just hit any key, the keyboard will wake up within 3 seconds, and the lights come back on and keyboard starts working.

Packing List

- 1* Foldable Bluetooth Keyboard
- 1* Bluetooth Mouse
- 1* Type-C Charging Cable
- 1* Collapsible Phone Holder
- 1* Storage Bag
- 1* User Manual

Manufacturer

Shenzhen Hangshi Electronic Technology Co., LTD

Address

Floor 2, Building A1, Zone G, Democratic West Industrial Zone, Democratic Community, Shajing Street, Bao 'an District, Shenzhen



AMANTO INTERNATIONAL TRADE LIMITED

The Imperial, 31-33 St Stephens Gardens, Notting Hill, London, United Kingdom, W2 5NA

Email: AMANTOUK@hotmail.com

Tel: + 447921801942



UAB Tinjio

Pranciškonų g. 6-R3, Vilnius, Lietuvos, LT-03100 Email: Tinjiocd@outlook.com

Tel: + 370 67741429



MADE IN CHINA

Documents / Resources

