



## RAB Flush Mount Instructions

[Home](#) » [RAB](#) » RAB Flush Mount Instructions 

### Contents

- [1 RAB Flush Mount](#)
- [2 IMPORTANT](#)
- [3 WHAT'S IN THE BOX](#)
- [4 TOOLS NEEDED](#)
- [5 INSTALLATION WITH J-BOX](#)
- [6 INSTRUCTIONS](#)
  - [6.1 Flush Mount](#)
- [7 Documents / Resources](#)
- [8 Related Posts](#)

**RAB<sup>®</sup>**

## RAB Flush Mount



### IMPORTANT

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE. RAB fixture must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED TO PREVENT ELECTRICAL SHOCK, POWER SHOULD BE TURNED OFF AT THE FUSE BOX BEFORE INSTALLATION.

### SAFETY WARNINGS:

Read all product labels and directions.

**WARNING-** Risk of fire or electric shock. LED Retrofit Kit installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician. THIS RETROFIT KIT IS ACCEPTED AS A COMPONENT OF A LUMINAIRE WHERE THE SUITABILITY OF THE COMBINATION SHALL BE DETERMINED BY AUTHORITIES HAVING JURISDICTION. PRODUCT MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN IN ACCORDANCE WITH THE APPLICABLE AND APPROPRIATE ELECTRICAL CODES. THE INSTALLATION GUIDE DOES NOT SUPERSEDE LOCAL OR NATIONAL REGULATIONS FOR ELECTRICAL INSTALLATIONS

- THIS DEVICE IS NOT INTENDED FOR USE WITH EMERGENCY EXITS.
- **WARNING-** Risk of fire or electric shock. Install this kit only in the luminaires that have the construction features and dimensions shown in the photographs and/or drawings and where the input rating of the retrofit kit does not exceed the input rating of the luminaire.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
- **WARNING-** To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

- Please examine all parts that are not intended to be replaced by the retrofit kit for damage and replace any damaged parts prior to installation of the retrofit kit. Replace only with RAB Lighting Inc. Visit our website: [RABLIGHTING.COM](http://RABLIGHTING.COM) Call our experts at 888 722-1000
- MODEL+ DSK34-6R169Xx120WS/DSK34-6R169XX120BS/DSK34-6R169XX120BRS/DSK34-6R169XX120BNS/DSK34-6R16.59XX120Ws.
- The recessed luminaire is intended for mounting only in a covered ceiling where only the led side of the luminaire will be exposed to damp or dry locations.
- INSTALLATION SHOULD ONLY BE PERFORMED AFTER POWER TO THE FIXTURE HAS BEEN DISCONNECTED.
- These instructions shall be included on an information sheet packaged with each unit.

**NOTE 1:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:


- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**NOTE 2:** Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.


## WHAT'S IN THE BOX



Fixture (1)



Nuts (3)



Screws (2)

## TOOLS NEEDED


### Installation with J-BOX

A screw driver is needed for installation

## INSTALLATION WITH J-BOX


1. Make sure the POWER IS TURNED OFF at the source to the J-box in which you are installing the product.
2. Disassemble the surface mount cover. (Fig.1)

Fig: 1

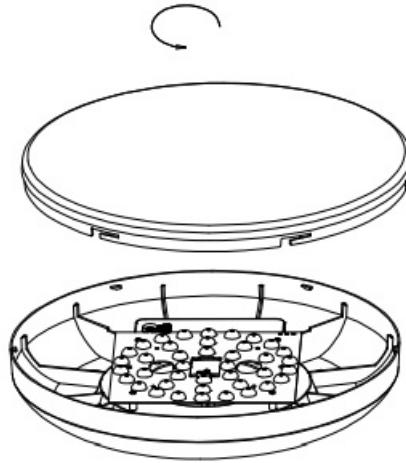

3. Select desired CCT level using switch. (Fig.2)

Fig: 2

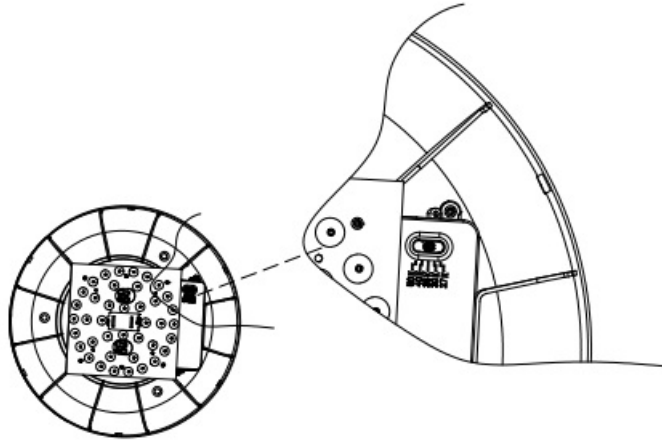


4. Insert screws into J-Box holes, leaving about 15mm of space between the screw heads and J-Box. (Fig.3)

Fig: 3




5. Wire the surface mount, white-white, black – black, green – green/ground. Once wire connections are made, secure each with a wire nut. (Fig.4)

Fig: 4



6. Lift fixture to ceiling and carefully tuck wires into J-Box. Align keyholes on surface mount with screws, then twist fixture until the screws engage the narrow end of the keyholes. Tighten screws to secure. (Fig.5)

Fig: 5

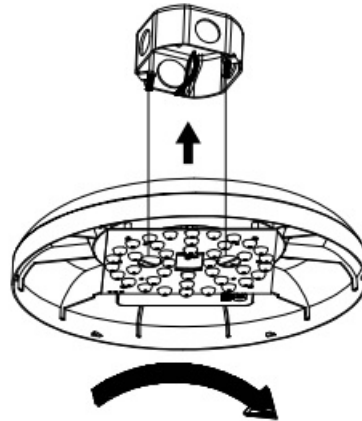

7. Reassemble the lamp cover. (Fig.6)

Caulk around the mounting surface edge with silicone sealant. (Fig.7)

Fig: 6


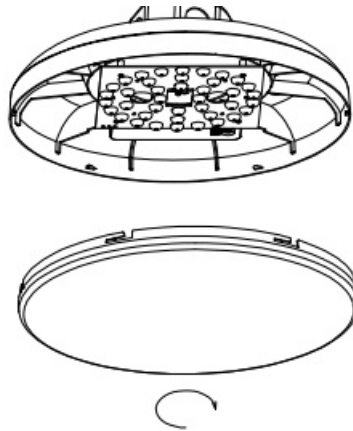




Fig: 7

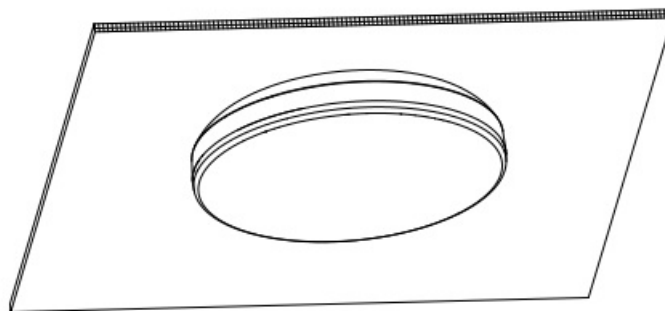


## INSTRUCTIONS

### Flush Mount

## SENSOR DETECTION RANGE

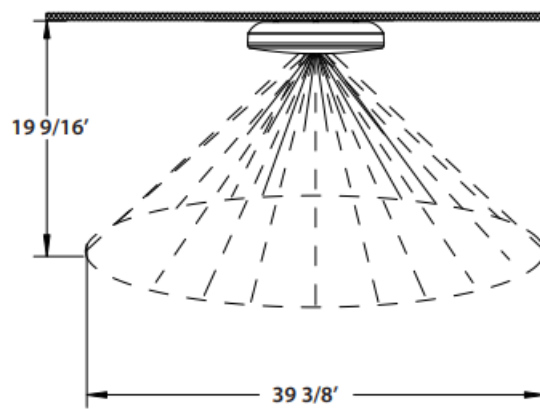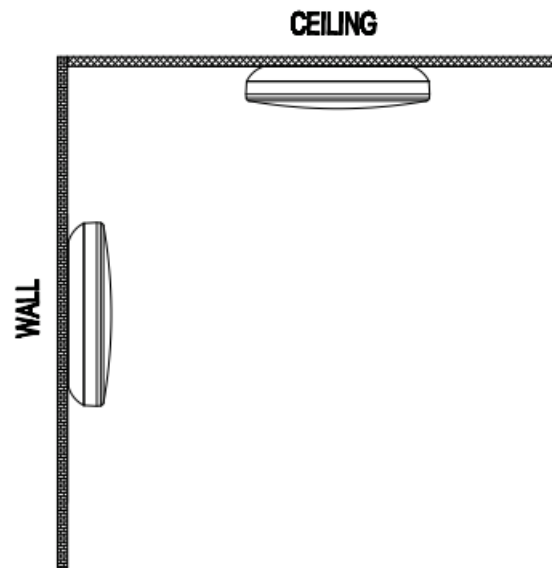

Ceiling Mount

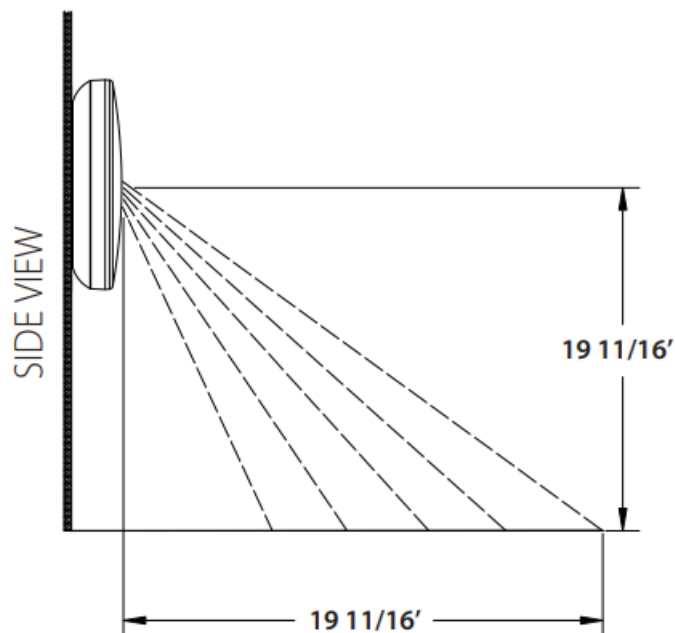

Wall Mount

## Easy Answers

[rablighting.com](http://rablighting.com) Visit our website for product info

## Tech Help Line

Call our experts: 888 722-1000


**e-mail:** Answered promptly – [sales@rablighting.com](mailto:sales@rablighting.com)

## Free Lighting Layouts

Answered online or by request

**RAB WARRANTY:** RAB'S warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

## Documents / Resources

	<p><a href="#">RAB Flush Mount</a> [pdf] Instructions CRVFAS-xxR-xx-9CCT-UNV-W-MVS, Flush Mount</p>
---	---