

DELTA T2759-SS

Delta Faucet Trinsic Roman Tub Trim T2759-SS Instruction Manual

Model: T2759-SS | Brand: DELTA

PRODUCT OVERVIEW

The Delta Faucet Trinsic Roman Tub Trim is designed to enhance your bathing experience with its sleek, modern aesthetic and functional design. This trim kit includes the tub faucet and handles, intended for deck-mount installation on 3-hole configurations with an 8-16 inch spread. The rough-in valve (model R2707) is sold separately.

Key features include:

- **Versatile Finish:** This Delta Faucet tub faucet boasts a stunning finish, enhancing any modern bathroom with its sleek look.
- **ADA-Compliant Design:** This bathtub faucet ensures ease of use for all, with an ADA-compliant design that marries functionality with style, making it accessible and elegant.
- **Flexible Installation Range:** The tub trim fits 3-hole 8-16" configurations, allowing for a seamless integration with your existing Roman bathtub.
- **Durable Construction:** Made with high-quality brass and copper materials for reliable performance and tarnish resistance.



Image: The Delta Faucet Trinsic Roman Tub Trim in Stainless Steel, featuring a high-arc spout and two lever handles, designed for deck-mount installation.

SETUP AND INSTALLATION

This Trinsic Roman Tub Trim is designed for straightforward installation. Please ensure you have the compatible Delta rough-in valve (model R2707) as it is sold separately and required for complete functionality.

Pre-Installation Checklist:

- Verify all components are present as per the packing list.
- Ensure the rough-in valve (R2707) is correctly installed according to its specific instructions.
- Confirm your bathtub has a 3-hole configuration with an 8-16 inch spread.
- Gather necessary tools (e.g., adjustable wrench, screwdriver, plumber's putty).

Installation Steps:

1. Refer to the detailed [Installation Manual \(PDF\)](#) for step-by-step instructions and diagrams.
2. Mount the faucet spout and handles onto the designated holes on the bathtub deck.
3. Connect the hot and cold water lines to the rough-in valve and then to the faucet handles.

4. Secure all connections and test for leaks before final tightening.

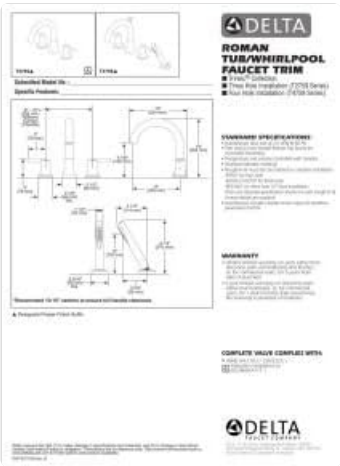


Image: Technical diagram illustrating the dimensions and installation requirements for the Delta Faucet Trinsic Roman Tub Trim.

OPERATING INSTRUCTIONS

The Delta Trinsic Roman Tub Trim features two lever handles for precise control over water temperature and flow. The design ensures a comfortable grip and effortless operation.

Water Flow and Temperature Control:

- To turn on the water, lift the lever handles.
- Rotate the handles to achieve the desired water temperature.
- To increase or decrease water flow, lift or lower the handles accordingly.
- To turn off the water, push the lever handles down to their original position.

MAINTENANCE AND CARE

Proper care will ensure the longevity and appearance of your Delta Faucet Trinsic Roman Tub Trim. The brushed finish is designed to be tarnish resistant.

Cleaning Guidelines:

- Clean regularly with a soft, damp cloth.
- Avoid abrasive cleaners, harsh chemicals, or scouring pads, as these can damage the finish.
- For stubborn water spots, use a mild soap solution and rinse thoroughly with clean water.
- Dry the faucet with a soft cloth after each use to prevent water spot buildup.

General Maintenance:

- Periodically check all connections for any signs of leaks and tighten if necessary.
- If water flow decreases, check the aerator for mineral buildup and clean as needed.

Troubleshooting

If you encounter issues with your Delta Faucet Trinsic Roman Tub Trim, refer to the following common solutions:

Problem	Possible Cause	Solution
Low Water Flow	Clogged aerator or mineral buildup.	Remove and clean the aerator. Soak in a vinegar solution if necessary.
Leaking from Spout/Handles	Loose connections or worn O-rings/gaskets.	Check and tighten connections. Replace O-rings or gaskets if worn (refer to installation manual for part numbers).
Difficulty Adjusting Temperature	Issue with the rough-in valve or handle mechanism.	Consult the rough-in valve manual or contact Delta Faucet support.

Specifications

- **Brand:** DELTA
- **Model Name:** T2759-SS
- **Color:** Stainless
- **Material:** Brass (faucet body), Copper (handle material)
- **Finish Type:** Brushed
- **Mounting Type:** Deck Mount
- **Number of Handles:** 2 (Lever Type)
- **Hole Count:** 3
- **Product Dimensions:** 10"D x 12"W x 10"H
- **Spout Height:** 10 Inches
- **Spout Reach:** 10 Inches
- **Item Weight:** 1 Pounds
- **Maximum Flow Rate:** 1.81 Gallons Per Minute
- **Special Feature:** Tarnish Resistant
- **ADA-Compliant:** Yes
- **UPC:** 034449686761

Warranty Information

Delta Faucet products are backed by a **lifetime warranty**, ensuring reliable performance and peace of mind. For specific details regarding coverage and terms, please refer to the official Delta Faucet warranty documentation or contact customer support.

Customer Support

For further assistance, product registration, or to explore other Delta Faucet products, please visit the official [Delta Store](#) on [Amazon](#) or their official website.

You may also find additional resources and FAQs on the Delta Faucet support pages.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question