

[Manuals.plus](#) /

› [WHOLESUN](#) /

› WHOLESUN Two-Way Fittings Instruction Manual

WHOLESUN 3a16d80f-44e5-42e8-b74c-9a2621c1a672

WHOLESUN Two-Way Fittings Instruction Manual

Model: 3a16d80f-44e5-42e8-b74c-9a2621c1a672

1. PRODUCT OVERVIEW

These Two-Way Fittings are designed as replacement parts specifically for WHOLESUN pressure washer hose reels. They are crucial components for maintaining the integrity and functionality of your pressure washer's high-pressure hose connection on the reel side. This accessory is particularly suitable for addressing failures or leaks in the high-pressure hose connection point on the reel.



Image 1.1: The WHOLESUN Two-Way Fitting, a replacement part for pressure washer hose reels.

2. INSTALLATION GUIDE

Replacing the Two-Way Fittings on your WHOLESUN pressure washer hose reel can resolve issues such as leaks. Follow these steps carefully for proper installation.

How to Replace Two-Way Platen Fittings?

Remove Screws
& U-shaped Metal



Image 2.1: The Two-Way Fitting shown installed on a pressure washer hose reel, indicating the screws and U-shaped metal to be removed.

1. Step 1: Remove the Reel and Unscrew.

Begin by carefully removing the hose reel from its mounting. Use a screwdriver to unscrew and detach the reel from its base or frame. This will provide access to the fittings.



**1. Remove the reel
and unscrew**



Image 2.2: Illustration of removing the hose reel and unscrewing its components.

2. Step 2: Remove the Two U-shaped Fixings.

Locate the two U-shaped fixings that secure the existing Two-Way Fittings. Carefully remove these fixings, often requiring a flat-head screwdriver or similar tool to pry them open or slide them out.

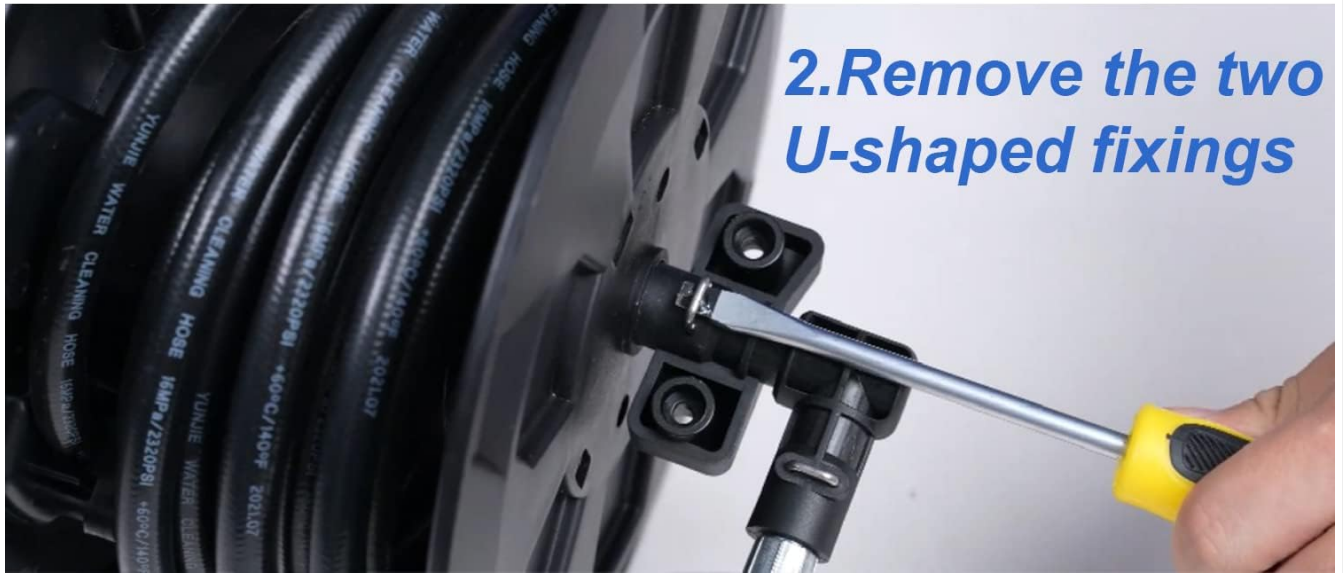


Image 2.3: Close-up view of removing the two U-shaped fixings from the hose reel connection point.

3. Step 3: Remove Old Fittings and Replace with New Ones.

Once the U-shaped fixings are removed, you can detach the old Two-Way Fittings. Carefully pull them out and then insert the new WHOLESUN Two-Way Fittings into position. Ensure they are seated correctly before reattaching the U-shaped fixings and reassembling the hose reel.



Image 2.4: Demonstrates the removal of the old fittings and the insertion of the new replacement fittings.

A detailed replacement and assembly video is available to assist with this process. While we cannot embed the video directly here, please refer to the product's online listing for visual guidance.

3. MAINTENANCE

To ensure the longevity and optimal performance of your Two-Way Fittings and pressure washer system:

- Regularly inspect the fittings for any signs of wear, cracks, or leaks.
- Ensure all connections are tight and secure before each use.
- Clean the fittings periodically to prevent buildup of dirt or debris that could affect sealing.
- Store the pressure washer and its components in a clean, dry environment when not in use.

4. TROUBLESHOOTING

If you experience issues with your Two-Way Fittings, particularly leaks from the hose reel connection, consider the

following:



I've been using this washer for a year and today I noticed a slight leak on the side of the reel, how do I fix it?

Due to excessive internal pressure and aging components, we recommend:

1. Message our customer support to get a F-R-E-E accessory.
2. You can buy two-way accessories directly.
3. You can buy the entire reel accessories (including high pressure hose & two-way fittings) for replacement

Image 4.1: A pressure washer hose reel showing a leak at the fitting connection point.

Scenario: Slight leak on the side of the reel.

If you notice a slight leak from the high-pressure hose connection on the side of the reel, this often indicates issues due to excessive internal pressure or aging components. We recommend the following solutions:

1. Contact WHOLESUN Customer Support to inquire about obtaining a replacement accessory.
2. Purchase new Two-Way Fittings directly for replacement.
3. Consider purchasing the entire reel accessories kit, which includes the high-pressure hose and Two-Way Fittings, for a complete replacement.

For visual assistance with replacement, a detailed video is often available on the product's online page. This video can guide you through the steps of replacing the Two-Way Fittings.



Q: How to replace the two-way fittings?

A: Here is a detailed replacement step video to help you.

Image 4.2: A visual prompt indicating that a detailed replacement video is available for the Two-Way Fittings.

5. SPECIFICATIONS

Attribute	Detail
Manufacturer	WHOLESUN
Item Model Number	3a16d80f-44e5-42e8-b74c-9a2621c1a672
Item Weight	1.76 ounces
Product Dimensions	3 x 3 x 1 inches
Maximum Pressure	2320 PSI (Pound per Square Inch)

6. WARRANTY AND CUSTOMER SUPPORT

WHOLESUN is committed to providing reliable products and excellent customer service.

- **Warranty:** We provide a 1-year warranty for these accessories. If you encounter any problems with your fittings within this period, please contact us.
- **Customer Support:** Our customer support team is available 24 hours a day to assist you. We offer professional repair services and sales support to ensure a worry-free experience.
- **Free Replacement Offer:** You may be eligible to receive Two-Way Fittings for free (limited to 2 years) by contacting our Customer Support directly.

For any inquiries or assistance, please refer to the contact information provided with your original product purchase or visit the official WHOLESUN website.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question