




## RENogy Bt-1 Bluetooth ModuleBt-1 Bluetooth Module User Manual

[Home](#) » [Renogy](#) » RENOGY Bt-1 Bluetooth ModuleBt-1 Bluetooth Module User Manual 

RENOGY Bt-1 Bluetooth ModuleBt-1 Bluetooth Module

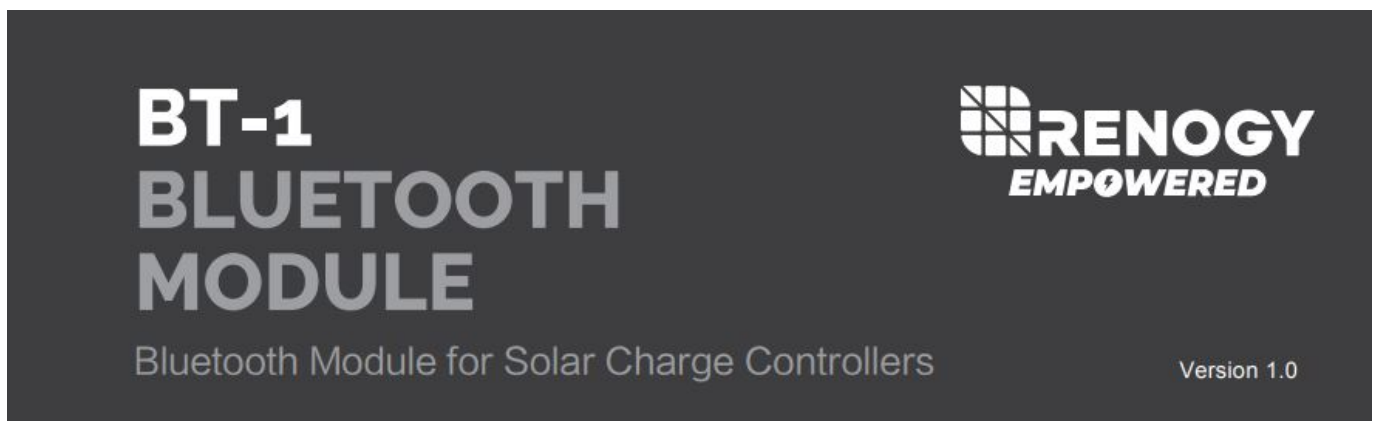

## General Information

The Renogy BT-1 is a great addition to any compatible Renogy solar charge controller. Powered by its RJ12 communication port, the BT-1 provides wireless monitoring of system data and allows users to change parameters through the Renogy BT/Renogy DCHome smartphone App.


### Contents

- [1 Key Features](#)
- [2 Identification of Parts](#)
- [3 Operation](#)
- [4 Technical Specifications](#)
- [5 Documents / Resources](#)
  - [5.1 References](#)
- [6 Related Posts](#)

## Key Features

- Wirelessly monitor and control compatible solar charge controllers via Bluetooth
- Connects to our user-friendly smartphone App, Renogy BT/Renogy DCHome, to keep track of your system
- Embedded exclusive Bluetooth chip with high efficiency and low energy consumption
- Bluetooth 4.2 and BLE technology provides fast and uninterrupted communication
- Powered directly through the RJ12 communication port
- Signal range up to 82ft
- Two LED lights indicate the power and Bluetooth connection condition

## Identification of Parts

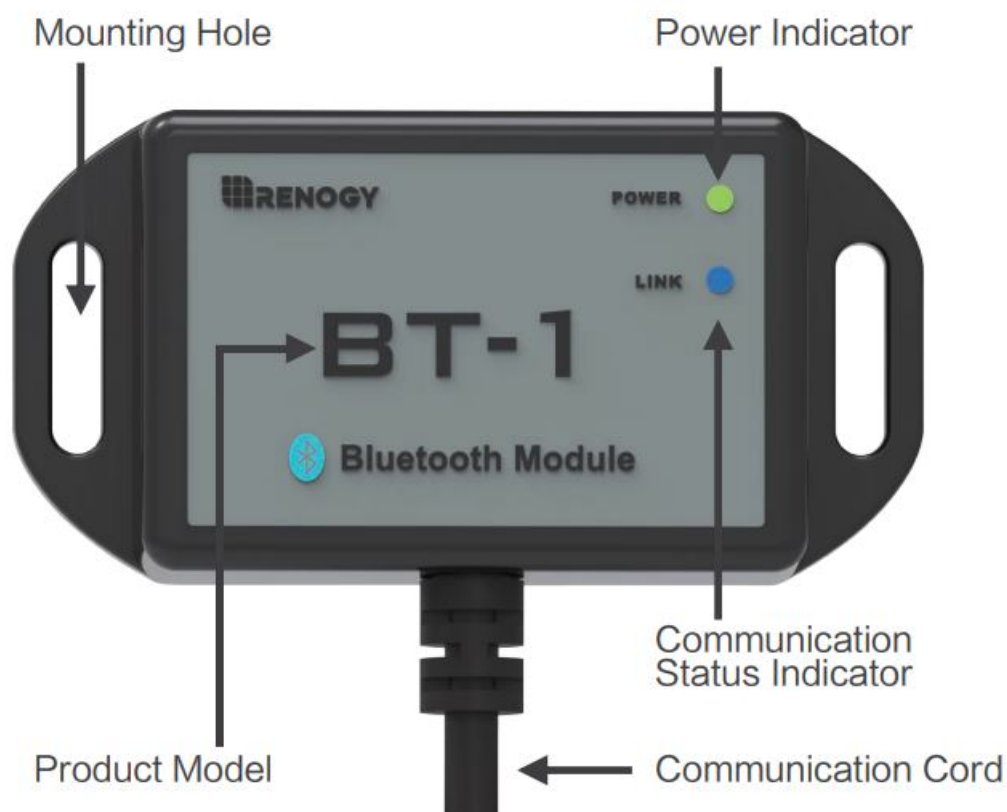

Operation

Connection Connect the BT-1 Bluetooth module to any Renogy solar charge controller with an RJ12 port and RS232 communication protocol.



Communication status indicator

Green Power Indicator:

Green Power Indicator:

Power Indicator	Status	Note
	Solid (Green)	Power On
	Off	Power Off

Blue Communication Indicator:

Link Indicator	Status	Note
	Flashing (Blue)	Communicating
	Off	Stand by

Compatible Models

Compatible Models	All Renogy Controllers with RJ12 port
Communication Protocol	RS232
Port Type	RJ12

Technical Specifications

Description	Parameter
Model	BT-1
Input Voltage	12V
Standby Power Consumption	0.04W
Operating Power Consumption	0.05W
Communication Range	≤82ft
Serial Baud Rate	Fixed Baud Rate 9600bps
Communication Protocol	RS232
Port Type	RJ12
Cable Length	5.00m (16.4ft)
Dimensions	67.3 X 35 X 14mm 2.65 X 1.38 X 0.55in
Installation Dimensions	67.3 φ3.5mm (2.66 φ 0.14in)
Operation Temperature	-20℃~85℃ (-4°F to 185°F)
Protection Grade	IP54
Weight	130g(4.58oz)

### To Download App

1. The Android version of the Renogy BT APP is available to download on [Renogy.com](https://www.renogy.com) and the [Google Play Store](https://play.google.com/store/apps/details?id=com.renogy.bt). In the Google Play Store, simply search “Renogy BT” or “Renogy DCHome” in the App Store to download.
2. For the IOS version, simply search “Renogy BT” or “Renogy DCHome” in the [App Store](https://apps.apple.com/us/app/renogy-bt/id1444444444) to download.  
The admin password in App is **135790123**
3. How to Connect via Bluetooth Please ensure your device’s Bluetooth setting is turned on. Select: Configuration > Search Devices > Device The green indicator on the BT-1 will turn on once it has successfully connected to the power. The blue indicator on the BT-1 will blink once it has successfully connected and during communication.

### [RENOGY.COM](https://www.renogy.com)

Renogy reserves the right to change the contents of this manual without notice.

### US

2775 E Philadelphia St, Ontario, CA 91761, USA  
909-287-7111

[www.renogy.com](https://www.renogy.com)

[support@renogy.com](mailto:support@renogy.com)

### Documents / Resources

	<p><a href="#">RENOGY Bt-1 Bluetooth Module</a><a href="#">Bt-1 Bluetooth Module</a> [pdf] User Manual</p> <p>Bt-1 Bluetooth Module</p>
---	---

## References

- [!\[\]\(3da2b303d29c1ea489bbe26a3f5ac664\_img.jpg\) Renogy® Official- offer all off grid solar system products](#)
- [!\[\]\(9421cea5a5b5319f79b58962509475ab\_img.jpg\) Renogy® Official- offer all off grid solar system products](#)
- [!\[\]\(17cce402a0380c36f25e02ecf91578f5\_img.jpg\) Solar Power Kits & Equipment for Sale | Renogy Australia](#)
- [!\[\]\(1086da34995924f924c8e8e23387d139\_img.jpg\) Renogy® Canada solar off-grid items, Canadian solar panels](#)
- [!\[\]\(ffa6dd4cd8800071ccc1a355540c540c\_img.jpg\) alle Produkte für netzunabhängige Solarsysteme| Renogy DE](#)
- [!\[\]\(dfba61b58454dd961d978e324a1fb5e5\_img.jpg\) Top off-grid solar kits, lithium batteries supplies | Renogy UK](#)
- [!\[\]\(9580d03b8c5bd7e23dc602a02886460d\_img.jpg\) RENOXY | \\_\\_\\_\\_\\_](#)
- [!\[\]\(406c76dc95713637836155a54c3b56d5\_img.jpg\) ๐<-๑<๙๘<๙๘๑๕TM1/๒...%๐๓TM9๕>»๗.๗.1๗ft๗f ๗°๕-€ | RENOXY JAPAN๗.๘๗f๓๗f๐๗.๘๗f๓๗.๗f๖๗f๗f—](#)