



reolink 280g Solar Panel Instruction Manual

[Home](#) » [reolink](#) » reolink 280g Solar Panel Instruction Manual 

*reolink 280g Solar Panel Instruction
Manual*



Reolink Solar Panel

Operational Instruction

  @ReolinkTech <https://reolink.com>

[Facebook](#)
[Twitter](#)


Contents

- [1 What's in the Box](#)
- [2 How to Install](#)
- [3 Troubleshooting](#)
- [4 Specifications](#)
- [5 Notification of Compliance](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)


What's in the Box

Solar Panel ×1
Bracket ×1
Screws (in pack) ×1
Mounting Template ×1


How to Install

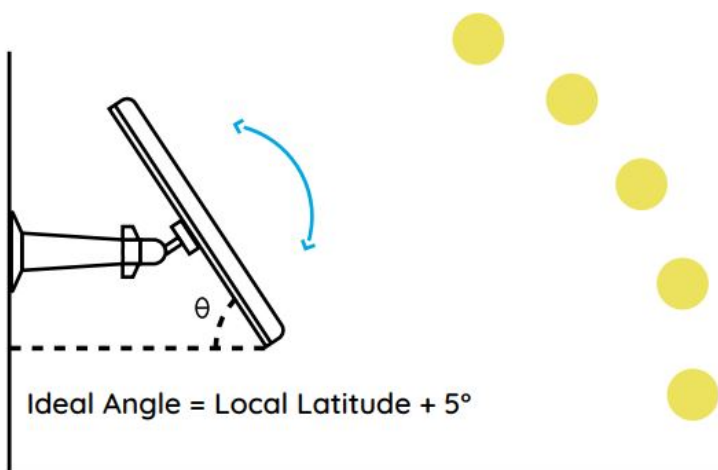


1. Please choose a location for your solar panel that gets the most sunlight throughout the year. The Reolink solar panel needs only a few hours of direct sunlight to sufficiently power up your camera daily. The amount of energy that the solar panel can produce is affected by weather conditions, seasonal changes, geographic locations, etc.



2. Mount the bracket with the mounting template and the screws provided in the package.




3. Slot the solar panel into the bracket and make sure it's secure.

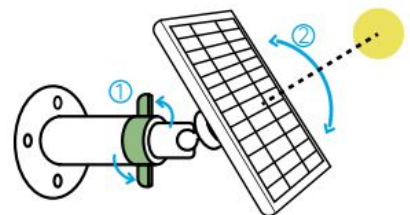


4. Loosen the adjustment knob on the bracket, and adjust the angle of the solar panel to receive the most direct sunlight. Then re-tighten the adjustment knob to secure the panel.

5. Connect the solar panel to the Reolink battery-powered camera with the micro USB cable.

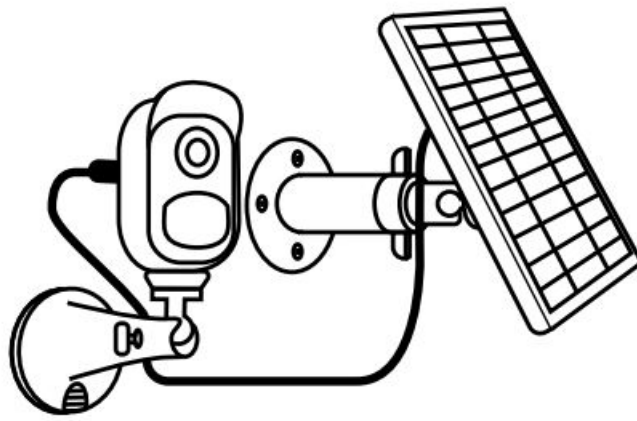

IMPORTANT NOTICE:

- Make sure the solar panel is not blocked. The energy harvesting efficiency drops drastically even when a small portion of the solar panel is blocked.
- Please don't install the solar panel completely horizontally. Otherwise your solar panel might accumulate dust and other debris easily. It's advised to install the solar panel angularly to receive the most direct sunlight.
- Wipe the solar panel regularly to remove dust or debris.
- Please charge the batteries in temperature between 0°C and 45°C (32-113°F). The solar panel won't charge the camera at temperatures below 0°C (32°F).

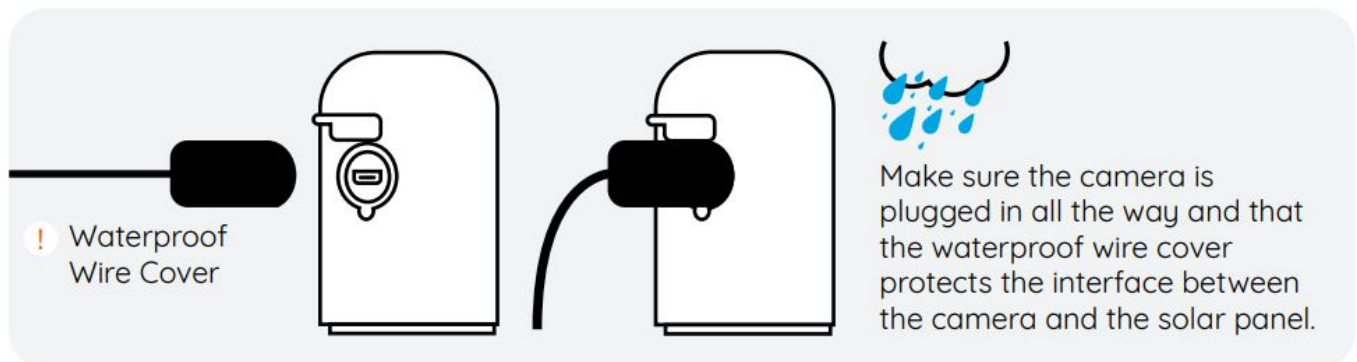

Troubleshooting

Stop Charging the Battery-powered Cameras

If your solar panel can't charge the camera anymore, try the following solutions:

- Unplug and re-insert the charging cable. Please ensure the connection between the solar panel and camera is stable.
- Make sure that your Reolink solar panel points toward the sun and is not shaded by trees, buildings, or other objects.
- Make sure that your camera is not charged at temperatures below 0°C (32°F) or above 45°C (113°F).

If these don't work, contact Reolink <https://support.reolink.com>

Specifications

Physical Parameters

Size: 185.4 x 120.4 x 6.5mm Cable Length: 4 Meters Weight: 280g

General:

Charging Temperature: 0°C to 45°C (32°F to 113°F)

Operating Temperature: -10°C to 55°C (14°F to 131°F) Weather Resistance: IP65 certified weatherproof

Notification of Compliance

FCC Compliance Statement

This device complies with Part 15 of FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For more information, visit: <https://reolink.com/fcc-compliance-notice/>.



Simplified EU Declaration of Conformity

Reolink declares that this device is in compliance with the essential requirements and other relevant provisions of Directive 2014/30/EU.



Correct Disposal of This Product

This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environment safe recycling.

Limited Warranty

This product comes with a 2-year limited warranty that is valid only if purchased from Reolink Official Store or a Reolink authorized reseller. Learn more: <https://reolink.com/warranty-and-return/>.

Terms and Privacy

Use of the product is subject to your agreement to the Terms of Service and Privacy Policy at reolink.com. Keep out of reach of children.

End User License Agreement

By using the Product Software that is embedded on the Reolink product, you agree to the terms of this End User License Agreement ("EULA") between you and Reolink. Learn more: <https://reolink.com/eula/>.

Technical Support

If you need help, please contact Reolink before returning your product. Most questions can be answered through our online support center at <https://support.reolink.com>

REOLINK INNOVATION LIMITED FLAT/RM 705 7/F FA YUEN COMMERCIAL BUILDING 75-77 FA YUEN STREET MONG KOK KL HONG KONG

(EU REP) Product Ident GmbH Hoferstasse 9B, 71636 Ludwigsburg, Germany prodsg@libelleconsulting.com

(UK REP) APEX CE SPECIALISTS LIMITED 89 Princess Street, Manchester, M1 4HT, UK info@apex-ce.com

Aug 2021 QSG5_D 58.03.005.0001

Documents / Resources

	reolink 280g Solar Panel [pdf] Instruction Manual 280g, Solar Panel, 280g Solar Panel
--	---

References

- [ce.com](#)
- [Reolink: Global Innovator in Smart Home Security and Camera Solutions](#)
- [Reolink: Global Innovator in Smart Home Security and Camera Solutions](#)
- [Geschäftsbedingungen – Reolink](#)
- [Garantie & Rückgabe – Reolink](#)
- [Innovador Global en Soluciones de Cámaras y Seguridad para el Hogar Inteligente](#)
- [Reolink : une entreprise innovante internationale en matière de solutions de caméras de surveillance et de sécurité intelligentes](#)
- [Garantie et Retour - Reolink](#)
- [Reolink: un innovatore globale nel campo della sicurezza per la casa intelligente e delle soluzioni di videosorveglianza](#)
- [Garanzia e reso – Reolink](#)
- [Warranty & Return – Reolink](#)
- [Reolink Support - Official Reolink Help Center](#)